



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



48 x 48 Digital LCD Timer 815E Part number 88857311



Relay output digital timers

- LCD or LED (815E)
- Multi-range
- Multi-voltage
- 1 or 2 relay outputs
- Reset function on panel (Timers 815, 815E)
- Data saved in the event of a break in supply (Timer 815, 815E)
- Access to programming lockable (Timer 814, 815 and 815E)
- Up or down timing mode
- Internal power supply by battery (10 years / 20 °C) (Not 815E)

Part numbers

	Type	Functions	Connections	Relay outputs	Supply voltage	Nominal rating
88857311	Timer 815E	A1, A1C, A2, A2C, AM, AMT, B, BM, C, CM, D, Di, DiM, Dpause, H, HM, T, TM, W, WM	11-pin plug-in	2 double timed changeover	12-24 V AC/ DC100 →240 V AC	2 x 5 A

Specifications


Number of digits	4
Height of digits	TIMER 812 - 814 - 815 : 8 mm TIMER 815E : 7mm
Timing ranges	99,99 s 999,9 s 9999 s 99 min 59 s 99,99 min 999,9 min 9999 min 99 h 59 min 99,99 h 999,9 h 9999 h (? 815E)
Repetition accuracy (with constant parameters)	TIMER 812 - 814 - 815 : $\pm 0,03 \% \pm 20 \text{ ms}$ TIMER 815E : $\pm 0,01 \%$
Display precision	TIMER 812 - 814 - 815 : $\pm 0,03 \% \pm 20 \text{ ms}$ TIMER 815E : $\pm 0,01 \%$
Min. control pulse	50 ms
Maximum reset time by de-energisation during timed delay	50 ms
Maximum reset time by de-energisation after timing	50 ms
Nominal rating	TIMER 814 - 815 : 8 A AC 8 A DC TIMER 812 : 5 A AC 5 A DC TIMER 815E : 5 A - 250 V AC
Max. breaking voltage	TIMER 812 - 814 - 815 : 250 V AC 30 V DC TIMER 815E : 250 V AC 20 V DC
Maximum power rating (resistive)	TIMER 814 - 815 : 2000 VA - 190 W TIMER 812 : 1250 VA - 120 W TIMER 815E : 1500 VA - 100 W
Maximum admissible current	15 A < 0,01 s
Minimum current	TIMER 812 - 814 - 815 : 250 V AC 30 V DC 100 mA TIMER 815E : 500 mW (10 V / 5 mA)
Electrical life at I max., 250 V AC resistive (cycles)	10^5
Max. permitted number of operations at 1 max 250 V AC resistive per hour	600
Mechanical life (operations)	TIMER 812 - 814 - 815 : 5×10^6 TIMER 815E : 20×10^6
Voltage variation	TIMER 814 : + 10 % - 15 % TIMER 815E : + 10 % - 10 %
Immunity from micro power cuts	< 0,03 s
Max. absorbed power	0.5 W / 12 V 1 VA / 24 V 0.5 W / 24 V 3.5 VA / 110 V 1 W / 48 V 11 VA / 220 V TIMER 815E : Max. 3 W
Temperature limits use (°C)	TIMER 812 - 814 - 815 : -10 °C →+60 °C TIMER 815E : 0 °C →+60 °C
Temperature limits stored (°C)	TIMER 812 - 814 - 815 : -30 °C →+70 °C TIMER 815E : -30 °C →+80 °C
Degree of protection front face	TIMER 812 - 814 - 815 : IP65 TIMER 815E : IP30

Insulation according to standard IEC/EN 61812-1, IEC/EN 60255-5	EN61812-1 - IEC255-5
Protection class according to CEI/EN 60529	■
Mounting Front panel, by clip	■
Mounting base-mounted on socket	■
Material	Self-extinguishing UL 94 grade V0
Weight (g)	TIMER 814 : 100 TIMER 812 - 815 : 140 TIMER 815E : 120


Accessories

Accessories	Code
8-pin solder-connected plug	25622301
11-pin connector base	25622080
11-pole rear base	79694002


Dimensions (mm)

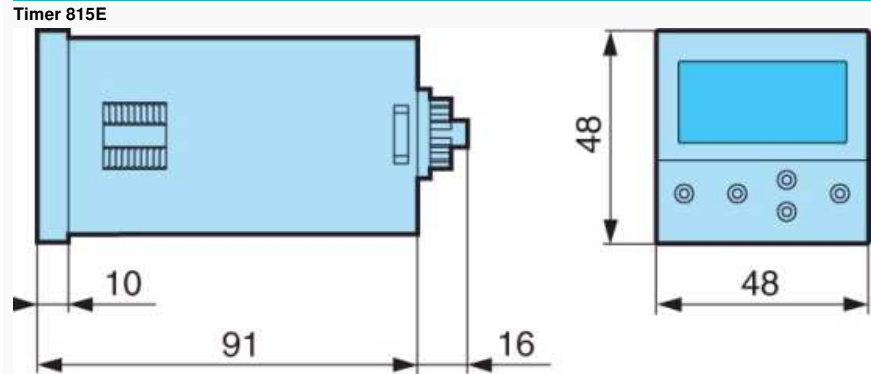

Dimensions (mm)

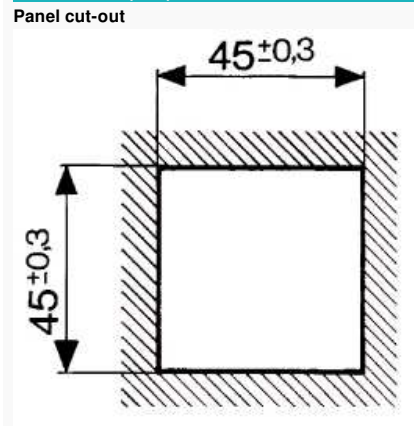


Dimensions (mm)

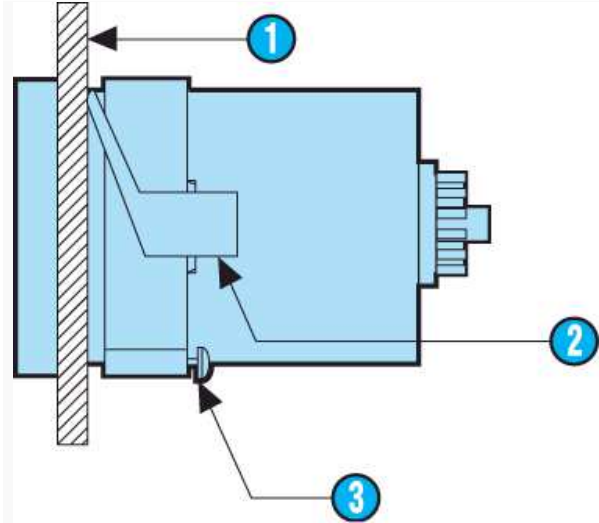

N°	Legend
1	Panel thickness 1 to 3,5 mm
2	Clip for panel-mounting
3	Positioning screw


Dimensions (mm)

11-pole rear base
79694002
Panel-mounted

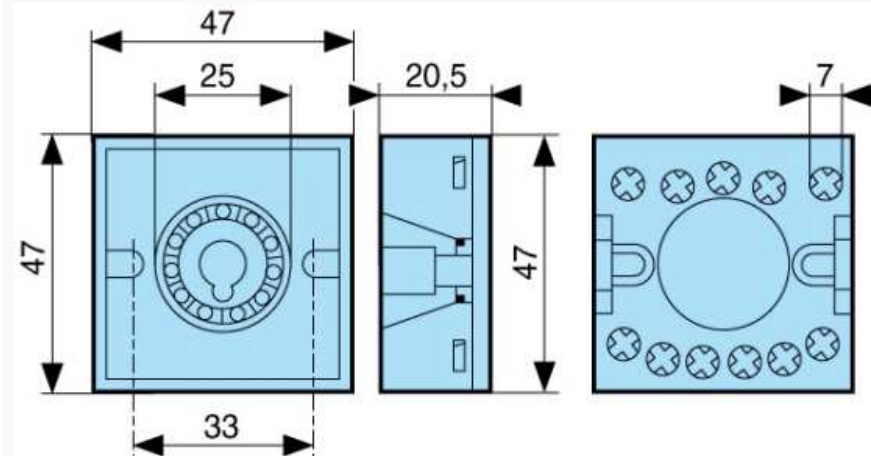


Dimensions (mm)

8-pin or 11-pin solder-connected plug
25622301 - 25622076

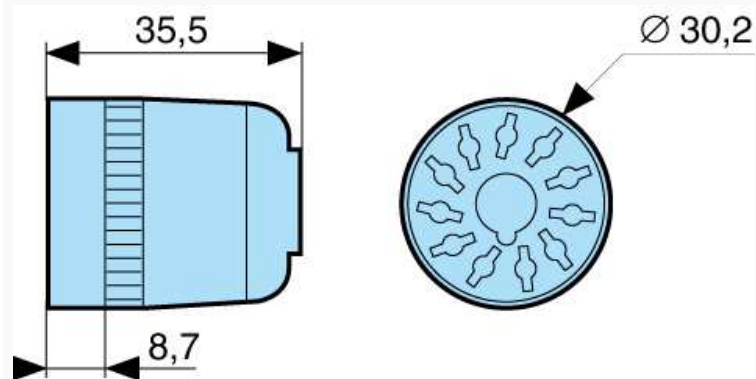


Dimensions (mm)

Connector socket
11-pin 25622080

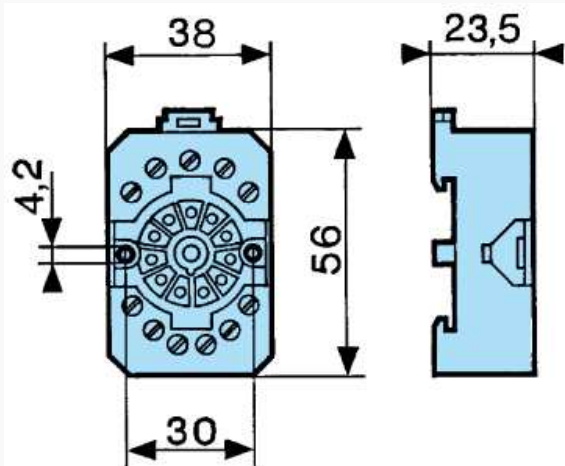

Curves

815E - Function A1

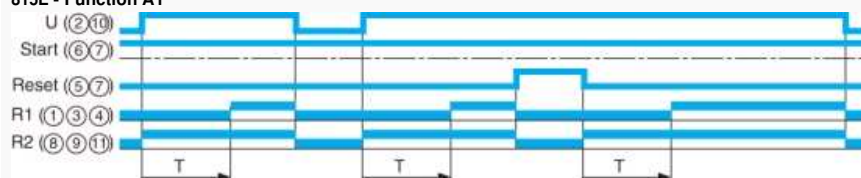


Function A1

Delay on energisation
1 timed relay
1 instantaneous relay

Curves

815E - Function A1c

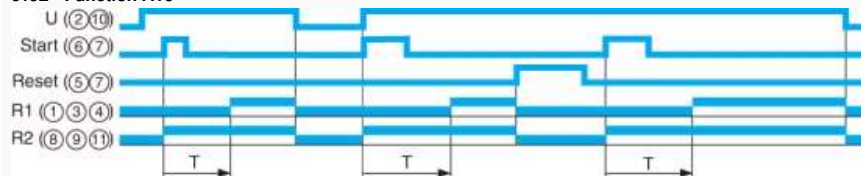


Function A1c

Delay on energisation
1 timed relay
1 instantaneous relay

Curves

815E - Function A2

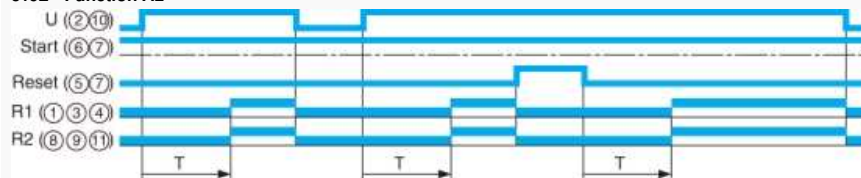


Function A2


Delay on energisation
2 timed relays

Curves


815E - Function A2c

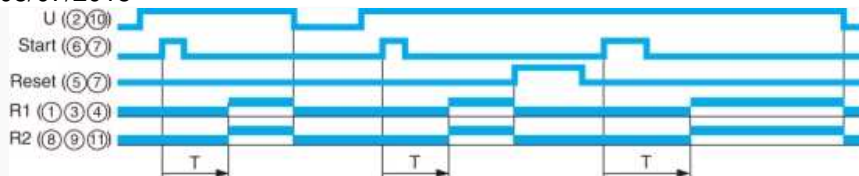**Function A2c**


Delay on energisation
2 timed relays

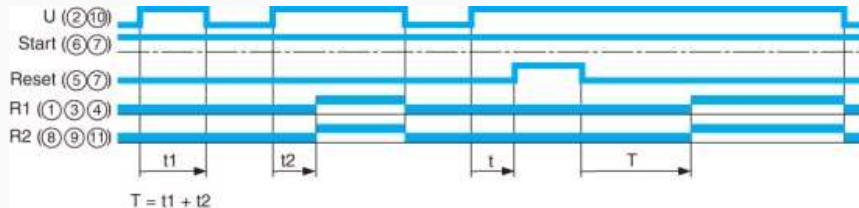Curves**815E - Function AM****Function AM**


Delay on energisation
Memory during timing. Reset

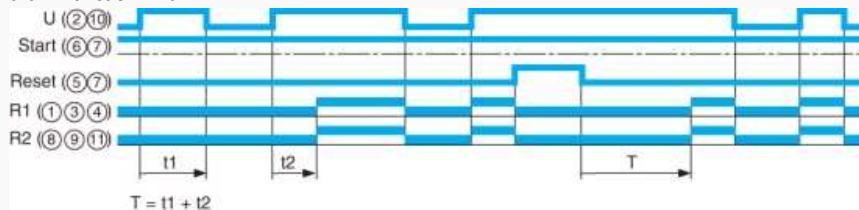Curves**815E - Function AMt****Function AMt**

Delay on energisation
Memory during and after timing. Reset

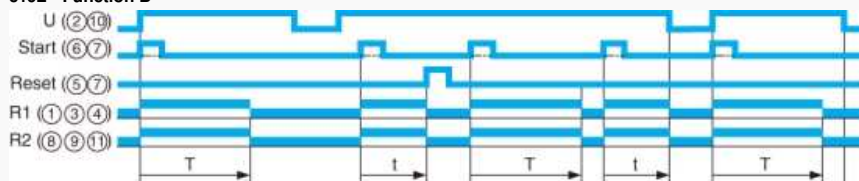Curves**815E - Function B****Function B**


Timing on impulse one shot
2 timed relays

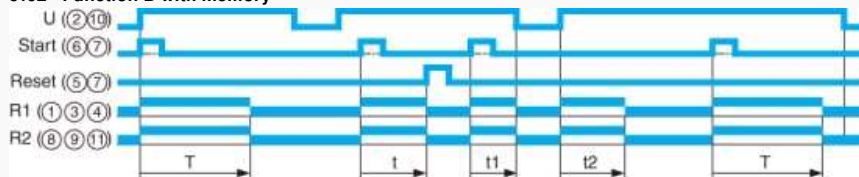Curves**815E - Function B with memory**


Function B
Timing on impulse one shot




Function C
Timing after impulse (re-opening of control contact)

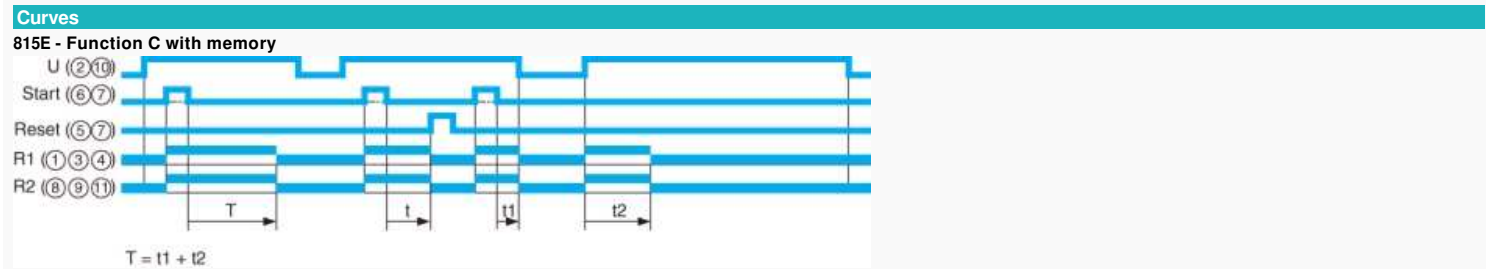


Function C
Timing after impulse (re-opening of control contact)

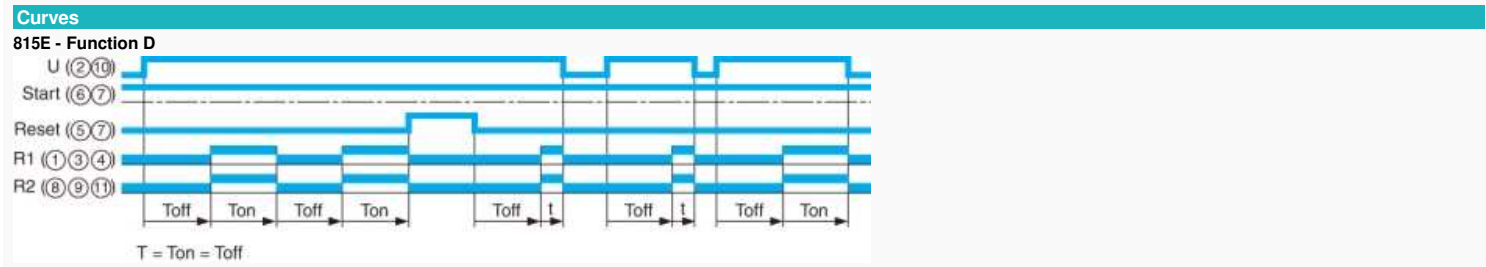


Function D
Flip-flop

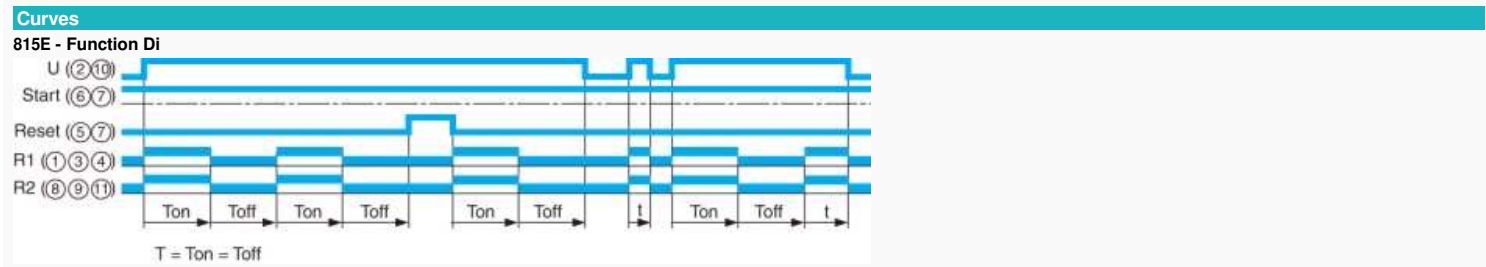

Function Di
Flip-flop



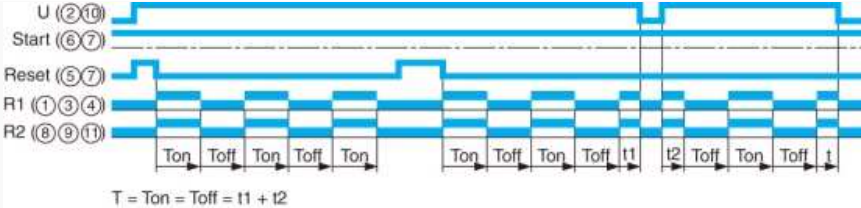


Function Di

Flip-flop

Curves

815E - Function D pause

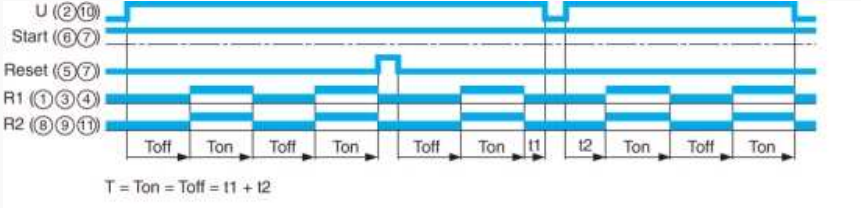


Function D

Flip-flop

Curves

815E - Function H

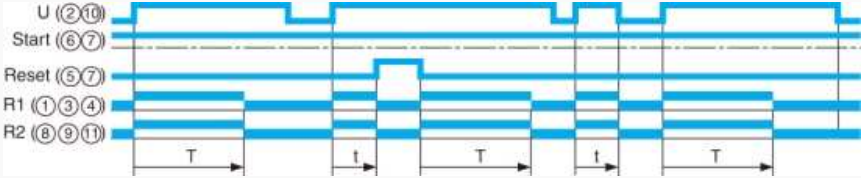


Function H

Timing on energisation, 2 timed relays

Curves

815E - Function H with memory

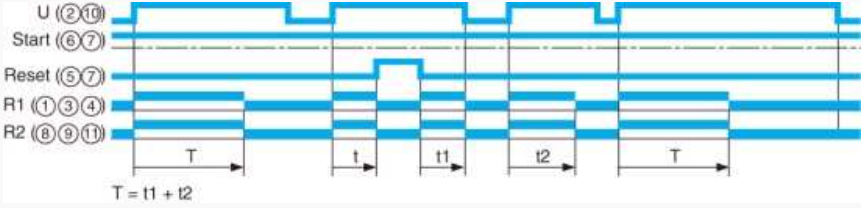


Function H


Timing on energisation, 2 timed relays

Curves


815E - Function T

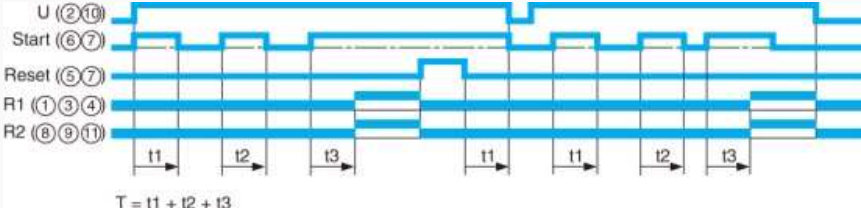


Function T
Timing on energisation by control signal (sum of times)

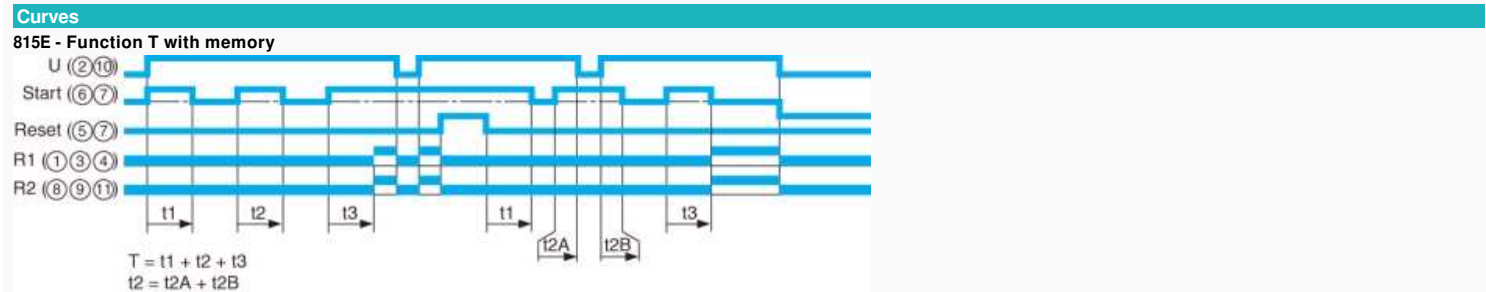


Function T
Timing on energisation by control signal (sum of times)

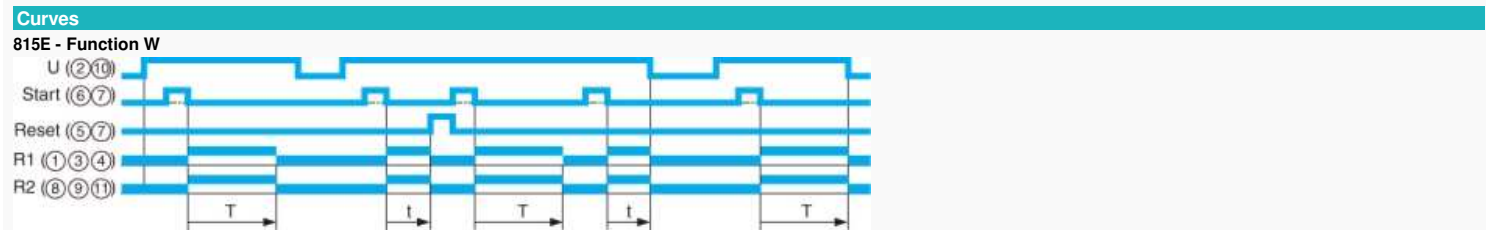

Function W
Timing after pulse on control contact, 2 timed relays

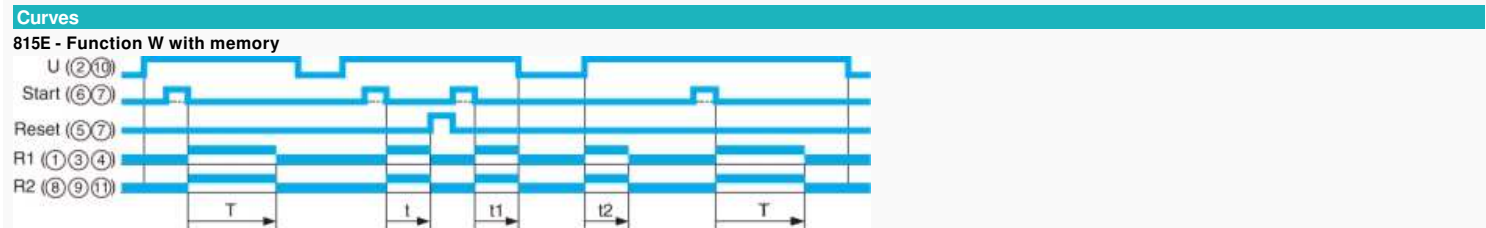

Function W
Timing after pulse on control contact, 2 timed relays

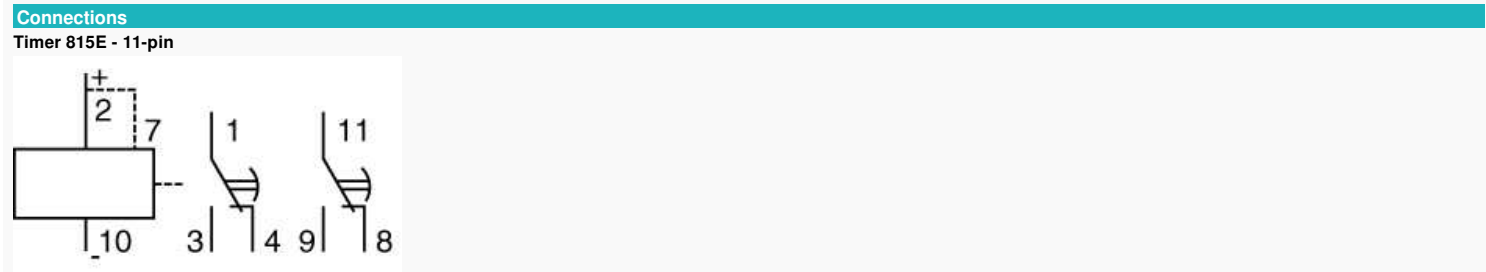


N°	Legend
	Supply
	Bridge (88 857 301-88 857 302-88 857 307)

1-3-4	Timed output contact
	Timed or instantaneous output contact

Connections

Timer 815E - 11-pin

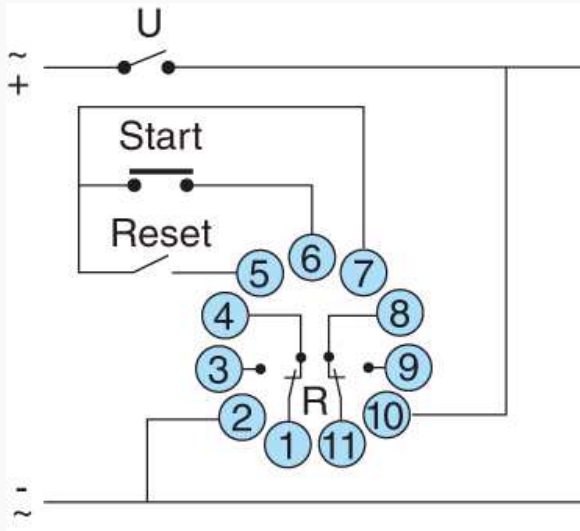

N°	Legend
①	Connect 6-7 after programming Function : A1-A2-AM-AMt-D-Di-H

Connections

Timer 815E - 11-pin

