mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.


We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



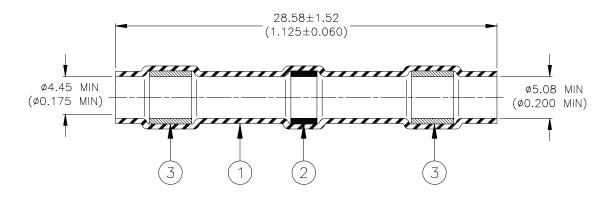


MATERIALS

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI J-STD-006.
 - FLUX: TYPE ROL1 per ANSI J-STD-004.
- 3. SEALING RINGS: Immersion resistant thermoplastic. Color gray.

APPLICATION

- 1. This part is designed to provide an environment protected shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed, and having tin or silver plated copper shields.
- 2. Part may be used on cables having a maximum diameter of 5.08 (0.200) and a minimum diameter of 2.54 (0.100) when measured as shown below.
- 3. Install using Raychem-approved convection or infrared tools in accordance with Raychem assembly procedure RCPS-100-70.
- 4. This part will meet the requirements of Raychem Specification RT-1404.

For best results, prepare the cable as shown:



Raychem Interconnect a division of type [Electronics 300 Constitution Drive Menlo Park, CA 94025, USA			TH L	IERMOFIT DEVICES	TITLE : SOLDERSLEEVE , HIGH TEMPERATURE IMMERSION RESISTANT			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.					DOCUMENT NO.: D-101-20			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	drawing		m reserves the right to amend this g at any time. Users should evaluate ability of the product for their tion.		DCR NUMBER: D010021		REPLACES: N/A	
DRAWN BY: I M. FORONDA		DATE: 11-Apr	-01	PROD. REV. K	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1

If this document is printed it becomes uncontrolled. Check for the latest revision.