



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

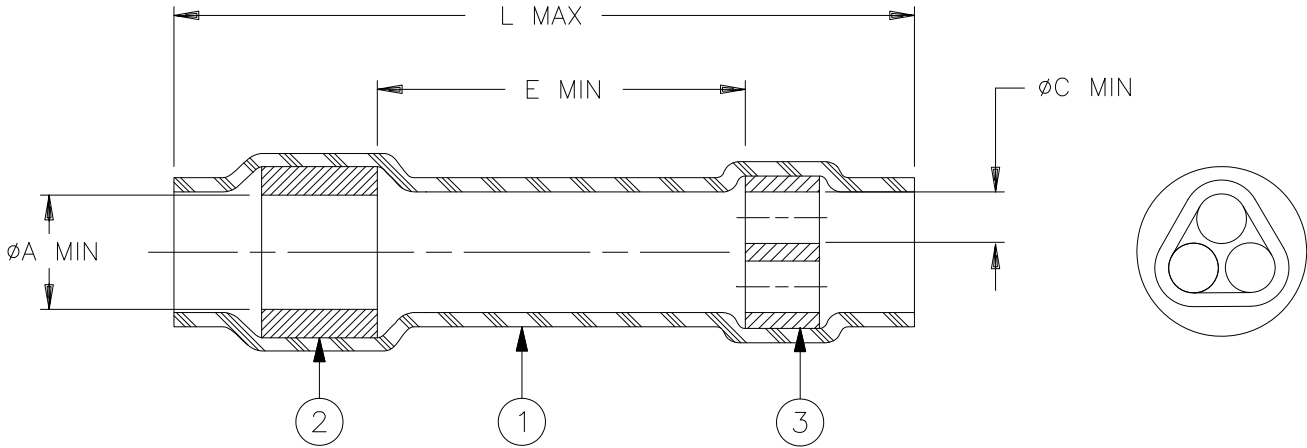

Product Revision		Product Dimensions				Cable Dimension
Product Name		L max	E min	øA min	øC min	øD max
D-436-94	E	29.7 (1.170)	15.25 (0.600)	4 (0.160)	2.35 (0.093)	2.35 (0.093)


MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
2. SEALING RING: Immersion resistant modified thermoplastic fluoroelastomer. Color: Blue.
3. INTEGRAL THREE WIRE SEAL: Immersion resistant modified thermoplastic fluoroelastomer. Color: Blue.

APPLICATION

1. This part is designed to provide an immersion resistant seal 2 or 3 to 1 in-line splices made of wires having insulations rated for at least +135°C.
2. Part will seal on a single wire having a minimum insulation diameter of 1.27 (0.050).
3. Temperature range: -55°C to +150°C.

Cable dimension:



STE TE Connectivity		Raychem Devices	TITLE: SEALING SLEEVE				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.			DOCUMENT NO.: D-436-94				
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE CONNECTIVITY (TE) RESERVES THE RIGHT TO CHANGE THIS DRAWING AT ANY TIME. USERS SHOULD EVALUATE THE SUITABILITY OF THE PRODUCT FOR THEIR APPLICATION.		REVISED PER: ECO-15-009348		REVISED DATE: JUNE 23, 2015	
DRAWN BY: M. FORONDA	DATE: 06/29/98	PROD. REV. SEE TABLE	DOC REV. B	SCALE: None	SIZE: A	SHEET: 1 of 1	