



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Paladin Tools®

Made in the USA

Pneumatic Operator 901510




The Paladin Pneumatic Operator was designed to be used with Paladin crimping, cutting and stripping tools with spring retraction. This unit works with standard air compressors that have a 1/4" coupler and a maximum output pressure of 120 PSI.

PLEASE READ AND UNDERSTAND THIS BOOKLET BEFORE USING THIS TOOL.

When using the Paladin Pneumatic Operator you must do the following to ensure safe usage:

1. Remember to wear SAFETY GLASSES.
2. Always set the regulator pressure to the minimum force needed to close the applicator correctly and close the cover.
3. Adjust the flow control speed setting to make sure that the tool does not close too quickly. (fig.1)
4. Always keep work area clean and free of debris.
5. Never put fingers in the applicator when the air line is connected to the pneumatic operator.


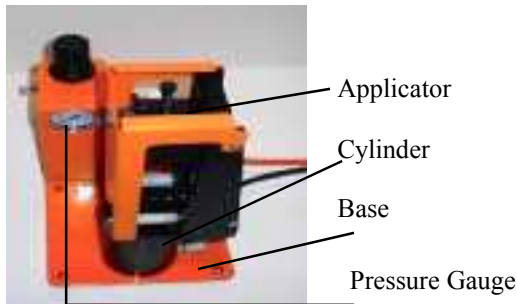


Assembly:

The tool comes completely assembled, you will only need to install your Paladin hand tool of choice and the machine is ready for use. It is recommended that you secure the Paladin Pneumatic Operator to your work surface. This can be done by either screwing the base directly to a table or by using a "C" clamp. Once the unit has been set up it is time to connect the 120 PSI air-line (Note: This unit was not designed for air pressure greater than 120 PSI). This unit is pre-tested at the factory, but before you install your hand tools please depress the foot pedal to verify the unit is working properly (fig. 2).

Recommended Tools:




1300 series
1600 series
8000 series
Strippax \ Professional
SureStrip

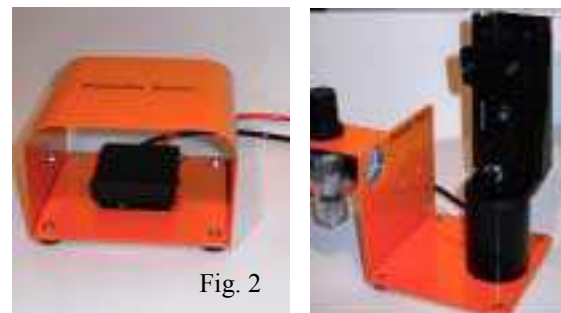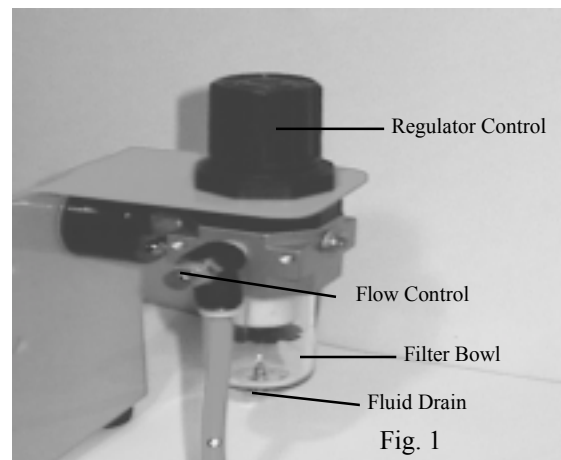

Paladin Tools®

Pneumatic Operator 901510

Your Paladin Pneumatic Operator is now ready for tool insertion. The method is the same for all tools. With the air line disconnected, loosen the top tightening screw and slip the hand tool into place. The lower handle will sit on the push wheel. Adjust the top tool holder to the angle desired so that the tool will close enough to complete the job. (ratcheting tools will need to be installed so that they close completely allowing them to re-open.) For Paladin Strip-pax strippers you will need to lower the upper tool holder so that the lower tool handle sits on the roller. Before using the unit adjust the pressure to the minimum amount need to work the tool. Then insert wire and test. If the wire will not strip increase the pressure slightly.

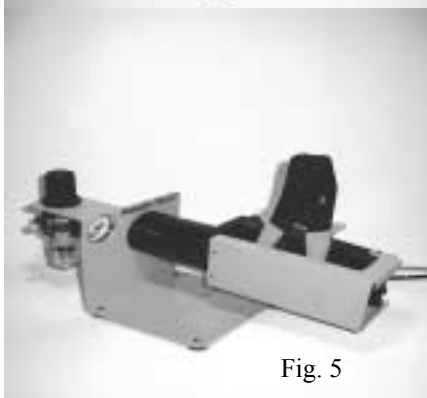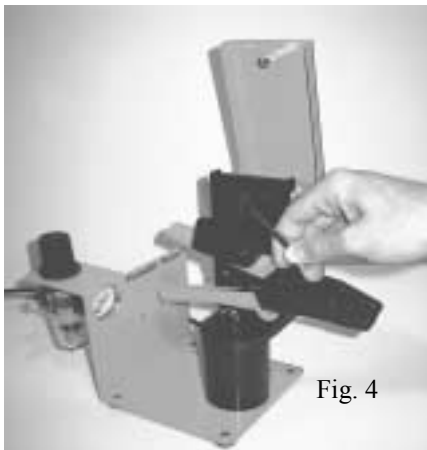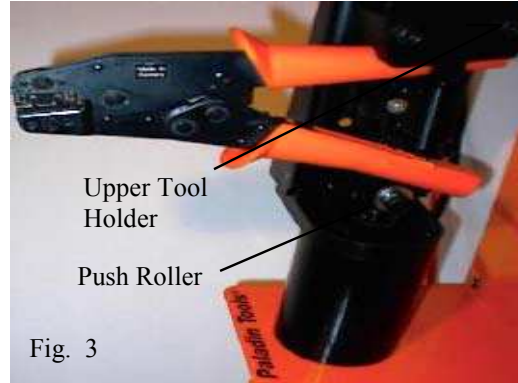

Proper operation depends on the user. There are several techniques that will help in the operation of this tool. By adjusting the upper tool clamp, you will be able to change the angle of how your tools fit into this unit (fig. 4) You also have the option of mounting the piston from a different angle, which will allow you to use a greater variety of crimpers (fig.5.) When crimping small terminals you may need to slow the movement of the cylinder. This can be achieved by closing the flow control valve (turn clockwise). Please take some time to try different settings so that you become familiar with your Paladin Pneumatic Operator.

1 year warranty from original date of purchase.

Technical service and parts contact:

Sarco, Inc.
(714) 550-9755
(714) 550-9794
<http://www.sarcomatic.com>

Paladin Tools®

Pneumatic Operator 901510

OSHA Safety Requirements

Opening and Release of Hand Tool Emergency Latch



Hand Tool Release Instructions

Should a foreign object get caught in the Pneumatic Operator, or a crimp terminal was misaligned, the operator will need to release the tool, if it is caught in mid stroke.

1. Take your foot off the Operator Pedal
2. Use a screw driver to activate the emergency release latch on the hand tool
3. Take the foreign object out
4. Cycle the Operator a few times to ensure proper functioning.

Dear Pneumatic Hand Tool Operator;

The Pneumatic Operator is OSHA compliant as long as the system allows for the emergency opening of the installed tool to allow release of the foreign object.

For non-ratcheting tools, the pneumatic operator will automatically open the tool upon release of the foot pedal thereby allowing extraction of the foreign article.

For ratcheting tools (i.e. crimping tools), it is required to ensure that the handles are installed into the retaining mechanism in a manner that allows the ratchet release trigger to be exposed and within easy access to the user. Whereas, when installing a crimping tool into the pneumatic operator actuator assembly, ensure there is clearance between the actuator cover plate, and the tool release trigger, to allow a user to implement an emergency release.

When properly followed, these instructions ensure OSHA compliance whereas, when a foreign object is inserted into the tool, and emergency release is enabled by releasing the foot pedal of the operator, and pressing the emergency release trigger on the tool to allow the ratchet mechanism to dis-engage and open the tool.

Sincerely,
Paladin Tools

Connecttool, Inc.
Ph: (800) 272-8665
Fax: (800) 272-5257
<http://www.paladin-tools.com>

Pneumatic Operator 901510

Assembly Instructions

Opening and Release of Hand Tool Emergency Latch

New and improved 3" longer stroke !!



1. Black Tube (air in)

2. Clear Tube (top fitting) down stroke

3. Orange Tube (bottom fitting) up stroke

Dear Pneumatic Hand Tool Operator;

The Pneumatic Operator is packaged with the foot pedal not connected. This way we can better package the unit for transit. The unit will set up in seconds.

1. Locate the black tube on the foot pedal, connect this tube to the flow control valve. See fig.1
2. Locate the clear tube. This is the tube that provides air on the down stroke. Connect this tube to the upper fitting on the cylinder.
3. The orange tube will connect to the lower fitting, this is for the up stroke.
4. The last tube which is packaged with a hex wrench is for the air input. Connect this tube to the fitting on the opposite side of the flow control.

Now you are ready to install your hand tool!

Trouble shooting:

1. After connecting the air to the pneumatic unit the cylinder automatically extends with out pushing the pedal.

SOLUTION: switch the tubes on the cylinder fittings.