



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



H2,5/16 TS GR**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 16


D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

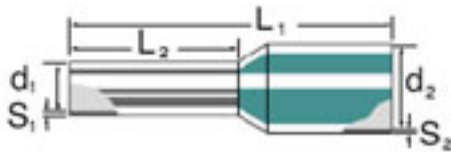

- supplied loose in poly-bag
- Weidmüller colour code
- DIN colour code
- other colour code

General ordering data

Order No.	9036210000
Type	H2,5/16 TS GR
Version	Wire end ferrule, 2.5 mm ² , 10 mm. Grey
GTIN (EAN)	4032248068005
Qty.	500 pc(s).

H2,5/16 TS GR

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	16 mm	Net weight	0.166 g
--------	-------	------------	---------

Product data

Conductor cross-section	2.5 mm ²	Wire connection cross section AWG, max.	AWG 14
Contact surface length (L2)	10 mm	Contact surface diameter (D1)	2.2 mm
Collar diameter (D2)	4.2 mm	Metal sleeve thickness (S1)	0.15 mm
Plastic collar thickness (S2)	0.25 mm		

Classifications

ETIM 2.0	EC000005	ETIM 3.0	EC000005
UNSPSC	31-16-31-02	eClass 4.1	27-06-07-01
eClass 5.1	27-40-02-01	eClass 6.0	27-40-02-01
eClass 7.0	27-40-02-01		

Product information

Description of article	Wire end ferrule with plastic collar, special size, grey
------------------------	--

Approvals

Approvals

