



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



A

B

C

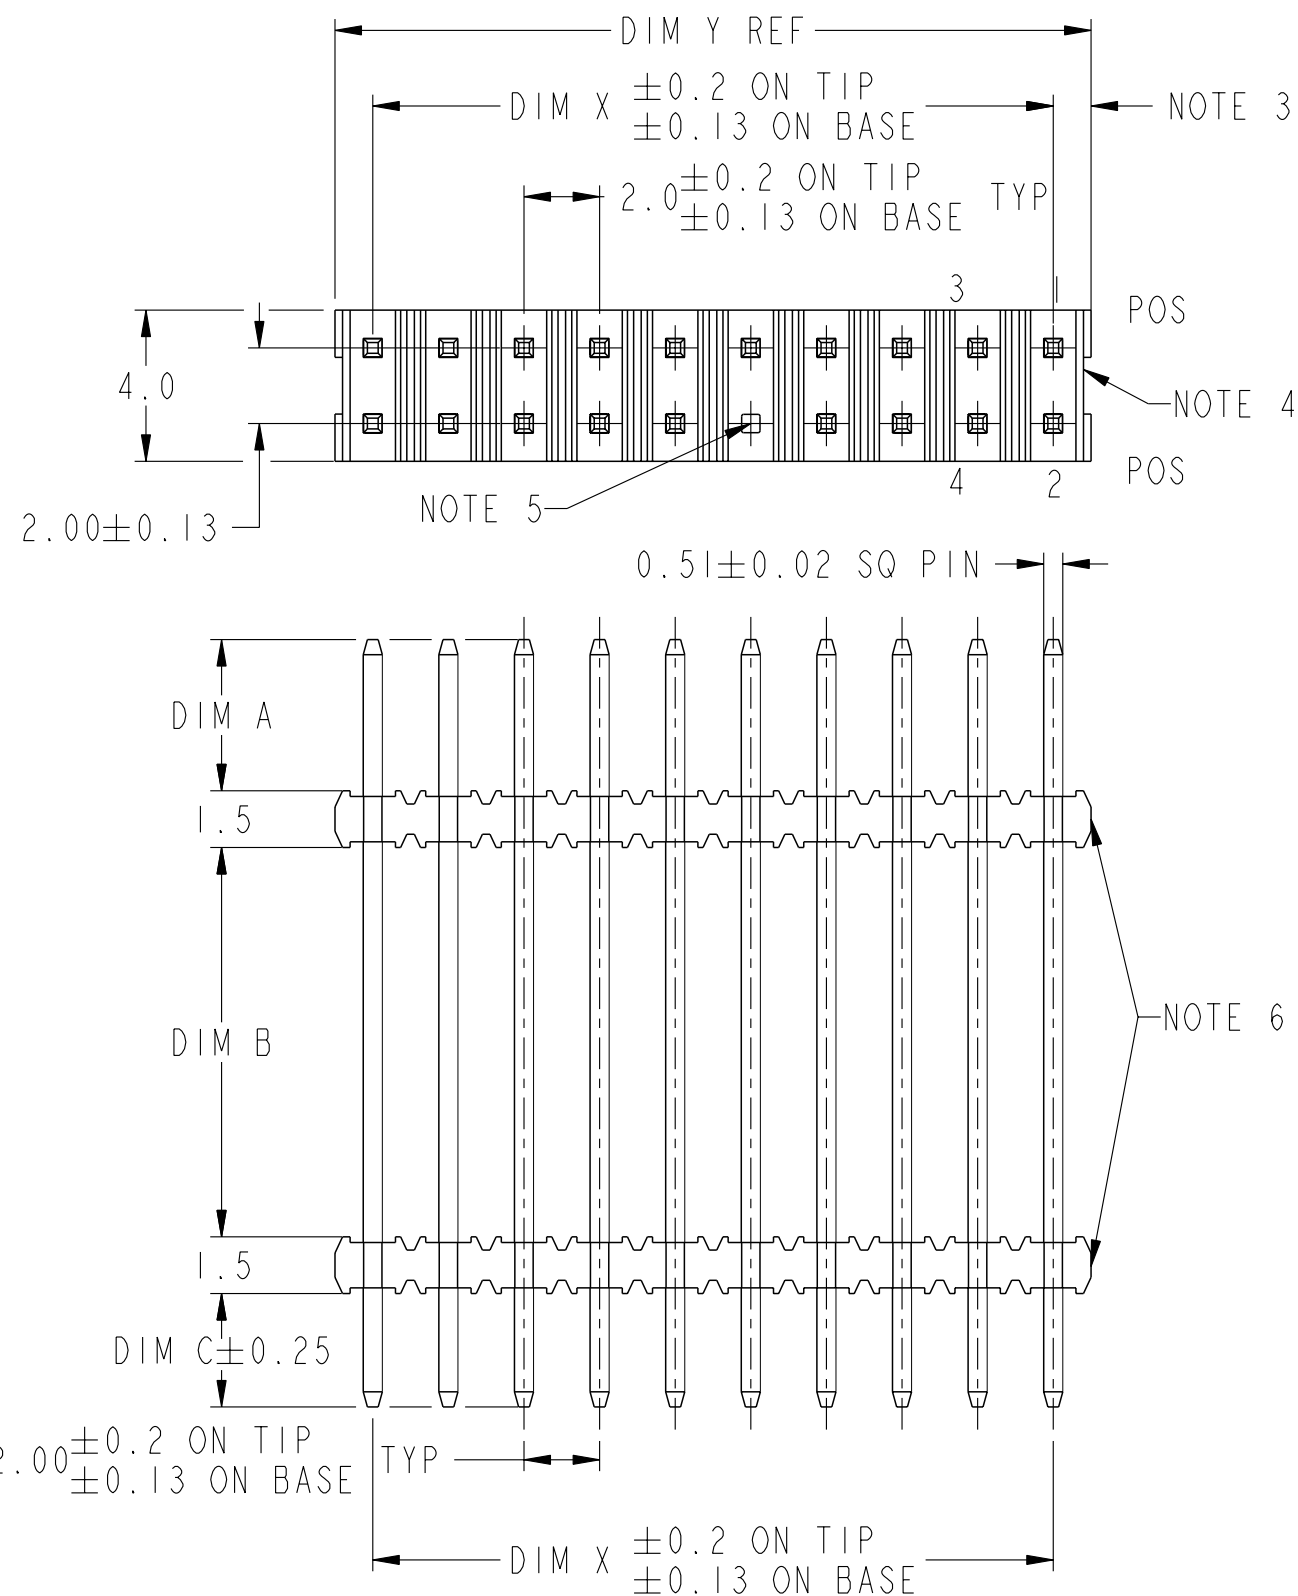
D

A

B

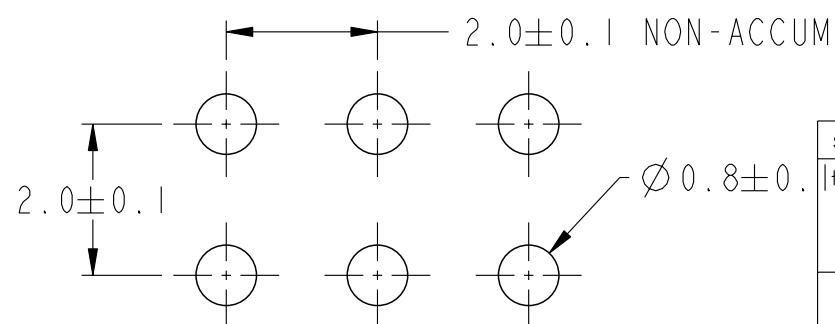
C

D



NOTES:

1. MATERIAL:
BODY : GLASS FILLED NYLON UL 94V-0 BLACK
PIN : PHOSPHOR BRONZE
2. TOLERANCE UNLESS OTHERWISE NOTED ± 0.25
3. DIM 1.0 ± 0.15 FOR MOLDED SIDE(S) ONLY. IF SIDE(S) ARE BROKEN, DIM 1.5 MAX APPLIES.
4. RECESS APPLIES TO MOLDED SIDE(S) ONLY.
5. POLARISATION BY OMISSION OF PIN. POSITION REFER TO TABLE.
6. MOLDED SIDES OF HSG TO BE ON SAME END FOR STACKABILITY-APPLICABLE FOR SPECIFIC P/N.
7. **MAX. PIN LENGTH POSSIBLE IS 21.0mm.
MAX. NUMBER OF POSITION IS 2 X 25.
8. PRODUCT DESCRIPTION CODE:
XXXXX-XXXLF
LEAD FREE. SEE NOTES 9 & 11
EXTENSION NUMBER
BASE NUMBER
9. P/N:90599-XXXLF IS SAME AS P/N:90599-XXX. THE SUFFIX 'LF' IS ADDED JUST FOR EASY LEAD FREE IDENTIFICATION.
10. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.57MM MINIMUM THICK CIRCUIT BOARD.
11. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.



RECOMMENDED MOUNTING HOLE LAYOUT


spec ref	-	dr	wcadmin	2010/11/01	projection	MM	size	A3	scale	5:1
tolerance std	ISO 406 ISO 1101	eng	Tim Yang	2014/12/15	chr	-	ecn no	ELX-N-19688-1	rel level	Released
surface	ISO 1302	appr	Tim Yao	2014/12/16	product family	MINITEK	rel level	Released	rev	BR
linear	0.X $\pm$ - 0.XX ± 0.25 0.XXX $\pm$ -	angular	0° $\pm$ -	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 1 of 4		



Copyright FCI.

D

1				2			3		4	
PRODUCT NO.		POS	DIM X	DIM Y	DIM A	DIM B	DIM C	PLATING	POL. POS	
A	90599-001	2X8	14	16	4.0	10.3	3.0	0.2μm MIN Au	-	
	002	2X20	38	40	4.0	-	3.0	0.2μm MIN Au	-	
	003	2X25	48	50	4.0	5.9	3.0	0.2μm MIN Au	-	
	004	2X10	18	20	4.0	0.5	3.0	0.2μm MIN Au	-	
	005	2X25	48	50	4.0	-	3.0	0.2μm MIN Au	-	
	006	2X8	14	16	3.5	5.0	3.0	0.2μm MIN Au	-	
	007	2X10	18	20	4.0	3.0	3.0	0.2μm MIN Au	-	
B	008	2X9	16	18	4.0	7.5	2.5	0.38μm MIN GXT	-	
	009	2X10	18	20	4.0	3.0	3.0	0.2μm MIN Au	10, 11	
	010	2X10	18	20	4.0	3.0	3.0	0.2μm MIN Au	10	
	011	2X4	6	8	4.0	4.5	1.5	0.2μm MIN Au	-	
	012	2X5	8	10	4.0	5.0	2.5	0.2μm MIN Au	-	
	013	2X12	22	24	8.9	9.7	2.5	0.38μm MIN GXT	-	
	014	2X4	6	8	4.0	4.5	2.5	0.2μm MIN Au	-	
C	015	2X11	20	22	4.0	7.0	2.5	0.2μm MIN Au	-	
	016	2X8	14	16	4.0	6.5	3.0	0.2μm MIN Au	-	
	017	2X10	18	20	4.0	10.3	3.0	0.2μm MIN Au	-	
	018	2X8	14	16	4.0	7.5	2.5	0.2μm MIN Au	-	
	019	2X20	38	40	6.0	5.0	2.5	0.76μm MIN GXT	-	
	020	2X5	8	10	2.3	2.0	4.0	0.38μm MIN Au	-	
	021	2X14	26	28	4.0	3.0	2.3	0.38μm MIN GXT	-	
D	022	2X14	26	28	4.0	8.0	2.3	0.38μm MIN GXT	-	
	023	2X17	32	34	4.0	3.0	2.3	0.38μm MIN GXT	-	
	024	2X17	32	34	4.0	8.0	2.3	0.38μm MIN GXT	-	
	025	2X4	6	8	4.0	-	2.5	0.2μm MIN Au	-	

dr	w wadmin	2010/11/01	projection 	MM 	size	A3	scale	5:1				
eng	Tim Yang	2014/12/15			ec n no	ELX-N-19688-1						
chr	-	-			rel level	Released						
appr	Tim Yao	2014/12/16	product family		MINITEK							
		title			MINITEK II			dwg no	90599	rev	BR	
RAIL-ROAD STR HDR												
www.fci.com		cat. no.			-	Product - Customer Drw				sheet 2 of 4		



Copyright FCI.

D

C

B

A

PRODUCT NO.	POS	DIM X	DIM Y	DIM A	DIM B	DIM C	PLATING	POL. POS
90599-026	2X6	10	12	4.0	3.0	2.3	0.38μm MIN GXT	-
027	2X25	48	50	4.0	8.0	2.3	0.38μm MIN GXT	-
028	2X12	22	24	5.5	10.7	2.5	0.38μm MIN GXT	-
029	2X4	6	8	4.0	9.0	2.3	0.38μm MIN GXT	-
030	2X7	12	14	4.0	9.0	2.3	0.38μm MIN GXT	-
031	2X15	28	30	4.0	9.0	2.3	0.38μm MIN GXT	-
032	2X15	28	30	4.0	6.0	2.3	0.38μm MIN GXT	-
033	2X4	6	8	4.0	0.5	2.3	0.38μm MIN GXT	-
034	2X18	34	36	4.0	8.0	2.3	0.38μm MIN GXT	-
035	2X15	28	30	4.0	7.0	2.3	0.38μm MIN GXT	-
036	2X15	28	30	4.0	3.0	2.3	0.38μm MIN GXT	-
037	2X14	26	28	4.0	5.0	2.5	0.76μm MIN Au	-
038	2X22	42	44	4.2 ⁺⁰ _{-0.1}	4.5 ⁺⁰ _{-0.2}	2.8	0.76μm MIN GXT	-
039	2X22	42	44	4.2 ⁺⁰ _{-0.1}	9.5 ⁺⁰ _{-0.2}	2.8	0.76μm MIN GXT	-
040	2X22	42	44	4.2 ⁺⁰ _{-0.1}	14.5 ⁺⁰ _{-0.2}	2.8	0.76μm MIN GXT	-
041	2X4	6	8	4.0	3.5	2.5	0.38μm MIN Au	-
042	2X15	28	30	4.0	9.7	2.35	0.38μm MIN GXT	-
043	2X15	28	30	8.3	3.7	2.5	0.38μm MIN GXT	-
044	2X22	42	44	4.0	8.0	2.3	0.38μm MIN GXT	-
045	2X18	34	36	4.0	2.5	2.5	0.38μm MIN GXT	-
046	2X20	38	40	4.0	5.0	3.0	0.76μm MIN GXT	-
047	2X6	10	12	2.8	1.7 ^{+0.1} ₋₀	2.5	0.38μm MIN GXT	-
048	2X16	30	32	4.0	8.0	3.0	0.38μm MIN GXT	-
049	2X15	28	30	4.3	6.7	2.3	0.38μm MIN GXT	-
050	2X4	6	8	4.35	1.0	4.35	0.38μm MIN GXT	-

dr	w wadmin	2010/11/01	projection	MM	size	A3	scale	5:1		
eng	Tim Yang	2014/12/15			ecn no	ELX-N-19688-1				
chr	-	-			rel level	Released				
appr	Tim Yao	2014/12/16	product family		MINITEK					
		title			MINITEK II		dwg no	90599		
www.fci.com		RAIL-ROAD STR HDR								
cat. no.		-			Product - Customer Drw			sheet 3 of 4		



D

C

B

A

1				2			3		4	
PRODUCT NO.	POS	DIM X	DIM Y	DIM A	DIM B	DIM C	PLATING	POL. POS	SEE NOTE 6 SEE NOTE 6 SEE NOTE 6	
90599-051	2X14	26	28	4.0	3.6	3.0	0.76µm MIN Au	-		
052	2X6	10	12	4.0	3.6	3.0	0.76µm MIN Au	-		
053	2X5	8	10	4.0	6.5	3.0	0.76µm MIN Au	-		
054	2X24	46	48	4.0	10.3	3.0	0.2µm MIN Au	-		
055	2X10	18	20	3.8	9.7	3.8	0.38µm MIN GXT	-		
056	2X15	28	30	3.9	0.6	3.9	0.76µm MIN Au	-		
057	2X20	38	40	4.9	2.1	4.9	0.76µm MIN Au	-		
058	2X2	2	4	3.4	2.0	3.4	0.38µm MIN Au	-		
059	2X10	18	20	4.0	7.3	4.0	0.76µm MIN GXT	-		
060	2X25	48	50	4.0	7.3	4.0	0.76µm MIN GXT	-		
061	2X20	38	40	3.9	2.1	3.9	0.76µm MIN GXT	-		
062	2X15	28	30	4.5	11.0	4.5	0.2µm MIN Au	-		
063	2X20	38	40	5.6	2.8	5.6	0.76µm MIN Au	-		
064	2X20	38	40	3.6	3.2	3.6	0.76µm MIN Au	-		
065	2X15	28	30	3.6	3.2	3.6	0.76µm MIN Au	-		
066	2X10	18	20	3.5	9.6	3.5	0.76µm MIN Au	-		
067	2X5	8	10	3.6	6.9	2.0	0.76µm MIN Au	-		
068	2X10	18	20	3.6	6.9	2.0	0.76µm MIN Au	-		
069	2X12	22	24	3.6	6.9	2.0	0.76µm MIN Au	-		
070	2X17	32	34	3.6	6.9	2.0	0.76µm MIN Au	-		
071	2X10	18	20	5.8	4.0	3.5	0.76µm MIN Au	-		
072	2X15	28	30	4.3	6.7	4.3	0.38µm MIN GXT	-		
073	2X16	30	32	2.5	22.0	2.5	0.76µm MIN Au	-		
074	2X12	22	24	7.0	17.0	3.0	0.2µm MIN Au	-		
075	2X8	14	16	7.0	3.0	7.0	CONTACT:0.05um MIN. Au TAIL:2.54um MIN. matte Sn	-		
076	2X5	8	10	5.6	4.9	5.6	0.2um MIN. Au	-		
077	2X8	14	16	6.0	10.5	4.0	0.2um MIN. Au	-		
078	2X18	34	36	6.0	12.0	4.0	0.2um MIN. Au	-		

dr	wcadmin	2010/11/01	projection 	MM 	size	A3	scale	5:1
eng	Tim Yang	2014/12/15			ecn no	ELX-N-19688-1		
chr	-	-			rel level	Released		
appr	Tim Yao	2014/12/16	product family		MINITEK			
		title		MINITEK II RAIL-ROAD STR HDR		dwg no		90599
www.fci.com		cat. no.		-		Product - Customer Drw		sheet 4 of 4