



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fuseholders

MAXI™ Fuse In-Line Fuseholder

The In-Line Fuseholder provides an efficient, simple installation method for MAXI™ Fuse applications.

Specifications

Terminal: Copper Alloy

Body: Black Thermoplastic (UL94HB)


Cover: Translucent Thermoplastic

Ambient Temp.: -10°C to +80°C

Maximum number of fuseblocks tied together is two for all ratings, up to and including 50A.

| Part Number | Description |
|-------------|--|
| 152001 | Fuseholder-Rated at 60A |
| 152900 | Cover |
| 913-653 | Ring tongue terminal for 2.5-6mm ² (12-10AWG) wire* |
| 913-654 | Ring tongue terminal for 5-10mm ² (10-8 AWG) wire* |
| 913-550 | M5 x 8 Screw per DIN 7985-4.8 |

*It is recommended that cross linked polyethelene (GXL) insulated wire be used, as described in SAE J1128 (Type, FLY in DIN 76722) or equivalent.

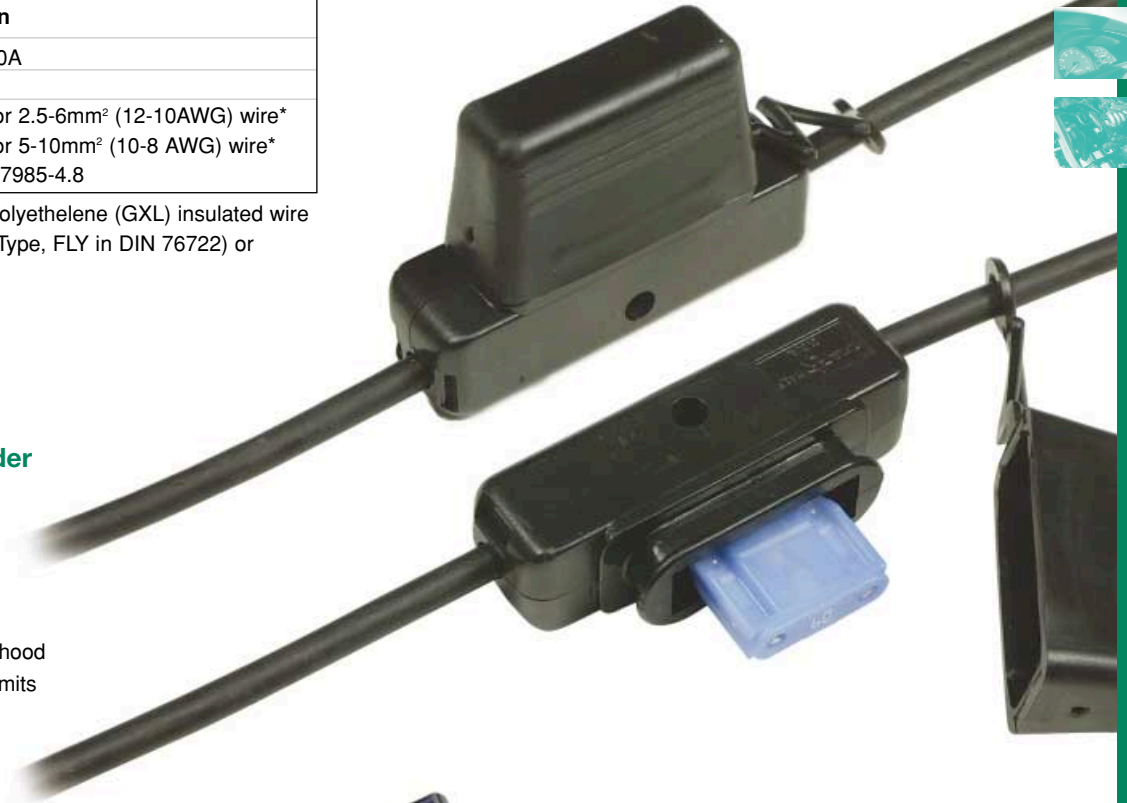

MAXI™ Fuse In-Line Fuseholder With Protective Cap

Supplied with two 6" leads -

6 gauge wire for up to 60 amp

MAXI™ Fuse applications,

this In-Line Fuseholder also provides

a protective cover for harsh under-the-hood

environments. Mounting hole also permits

easy bulkhead installation.

Part Number: MAH 1

ATO® Blade Fuse Splashproof In-Line Fuseholder

The Splashproof Fuseholder provides a protective cover to permit the use of ATO® Fuses in harsh environments.

Specifications

Body: Black Alcryn Thermoplastic

Cover: Black Alcryn Thermoplastic

Ambient Temp.: -10°C to +80°C

| Part Number | Description |
|-------------|--|
| FHAC001 | #16AWG (1.0mm ²) stranded black wire with terminals rated for 20A |
| FHAC002 | #12AWG (3.0mm ²) stranded orange wire with terminals rated for 30A |

