



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DIMENSIONING AND TOLERANCING PER ASME Y14.5M (ISO STANDARDS). THIS DRAWING IS A CONTROLLED DOCUMENT.

TOOL NUMBER	WIRE SIZE mm ² [AWG]	INSULATION DIAMETER mm [in.]	INSUL. ADJ.	FLIP LOCATOR	STRIP LENGTH mm [in.]	CRIMP HEIGHT mm [in.]	CONTACT PART NUMBERS ¹		CONTACT DESCRIPTION	APPLIC. SPECIF.
							LOOSE PIECE	STRIP FORM		
91563-1 91563-3	0.20-0.56 [24-20]	1.50-2.20 [.059-.087]	YES	NO	4.0-4.5 [.157-.177]	0.98 ± 0.05 [.039 ± .002]	171699-[] ⁴	171630-[] ^{3 4}	ECONOSEAL "J" II, .070 Series Contacts	114-5082
	0.20-0.56 [24-20]				1.02 ± 0.05 [.040 ± .002]	173600-[] ⁴	171631-[] ^{3 4}			
91573-1 91573-3	0.50-0.89 [20-18]	2.00-2.60 [.079-.102]	NO	NO	3.5-4.5 [.138-.177]	1.20-1.35 [.047-.053]	175027-[] 175030-[]	173631-[] ³ 173645-[] ³	.070 Series Contacts	114-5091 114-5092 114-5091-9 114-5092-9
	1.25-1.42 [16]				1.45-1.60 [.057-.063]					
91580-1 91580-3	0.20-0.22 [24]	1.20-1.50 [.047-.059]	NO	NO	3.5-4.5 [.138-.177]	1.00-1.10 [.039-.043]	175026-[] 175029-[]	173630-[] ³ 173633-[] ³	.070 Series Contacts	114-5091-9 114-5092-9
	0.30-0.35 [22]	1.20-1.60 [.047-.063]				1.05-1.18 [.041-.046]				
91583-1 91583-3	0.50-0.89 [20-18]	2.00-2.70 [.079-.106]	YES	NO	4.5-5.0 [.177-.197]	1.20-1.32 [.047-.0512]	173707-[] ⁵	171662-[] ^{3 5}	ECONOSEAL "J" II, .070 Series Contacts	114-5082
	1.25-1.42 [16]					1.38-1.52 [.054-.060]				
91585-1 91585-3	0.50-0.89 [20-18]	2.00-2.70 [.079-.106]	YES	NO	4.5-5.0 [.177-.197]	1.20-1.32 [.047-.052]	173706-[] ⁵	171661-[] ^{3 5}	ECONOSEAL "J" II, .070 Series Contacts	114-5082
	1.25-1.42 [16]					1.38-1.52 [.054-.060]				


¹ LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.

2. AMP, CERTI-CRIMP and ECONOSEAL ARE TRADEMARKS.

³ TERMINAL MUST BE PRE-FORMED BEFORE IT CAN BE CRIMPED.

⁴ .070 TYPE RUBBER PLUG 172746-[] OR 178210-[] IS USED WHEN CRIMPING THIS PRODUCT.

⁵ .070 TYPE RUBBER PLUG 176886-[] OR 172888-[] IS USED WHEN CRIMPING THIS PRODUCT.

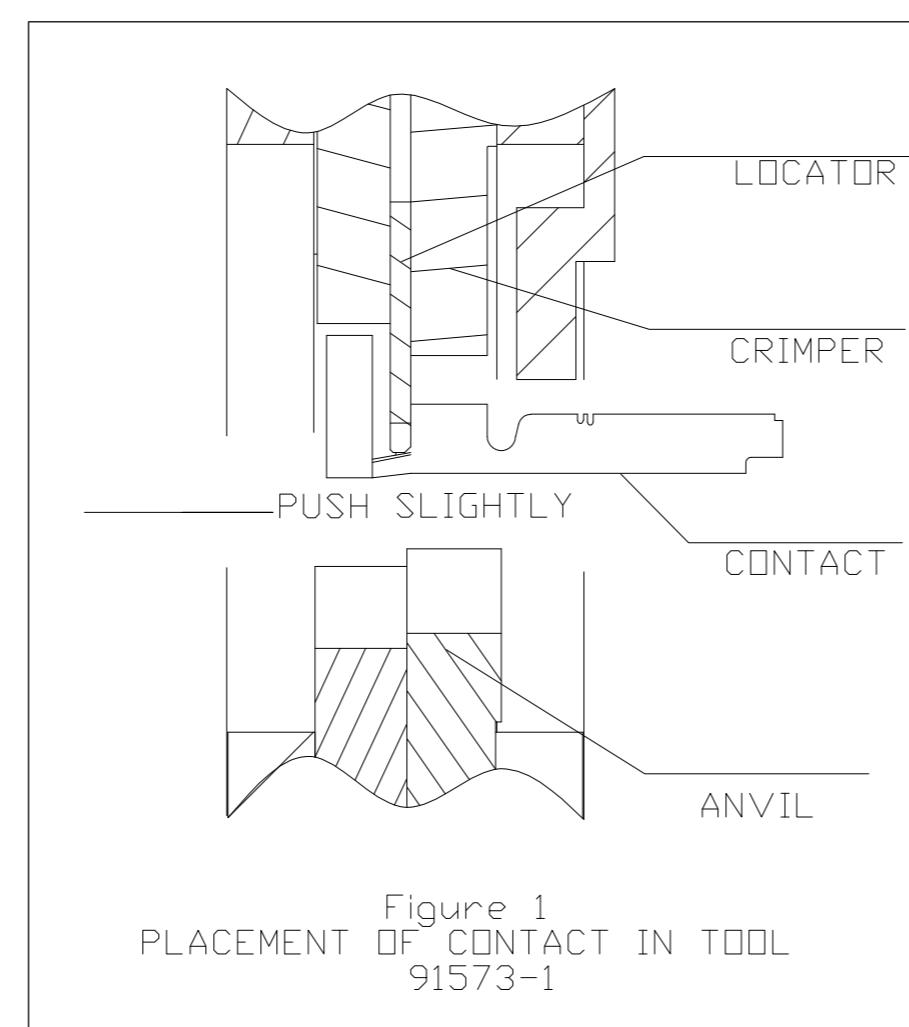

⁶ POSITION CONTACT BETWEEN CRIMPS SO LOCATOR / INSULATION STOP ENTERS THE CONTACT. PUSH THE CONTACT TOWARD THE LOCATOR AS SHOWN IN FIGURE 1. HOLDING CONTACT IN PLACE, SQUEEZE TOOL HANDLES TOGETHER UNTIL INSULATION BARREL ANVIL STARTS ENTRY INTO INSULATION CRIMPER. DO NOT DEFORM INSULATION BARRREL OR WIRE BARREL AT THIS MOMENT.

⁷ -1 IS A COMPLETE CERTICRIMP II HAND TOOL ASSEMBLY. -3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.











8. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN: M. YOUNGER 21FEB2012		MATERIAL: -		HEAT TREAT: -	
mm		0 PLC ± -		CHK: E.A. WOLFE 22FEB2012					
		1 PLC ± -		APVD: E.A. WOLFE 22FEB2012					
		2 PLC ± -		NAME: E.A. WOLFE					
		3 PLC ± -							
		4 PLC ± -							
		ANGLES ±							
		SURFACE TEXTURE		✓					
P LTR		REVISION RECORD		DATE		DWN		APVD	
B4		REVISED - NEW FORMAT		2-2012		MY		BAW	
SCALE		SIZE		DRAWING NO		SHEET		REV	
-		A1		1583009		1		2	

LOC: A
DIST: 00

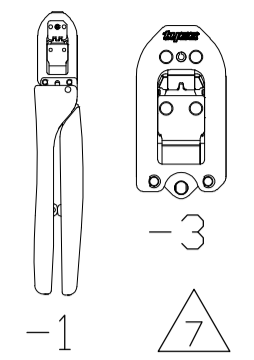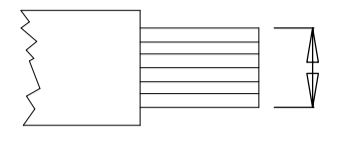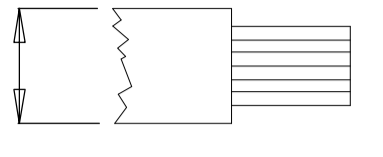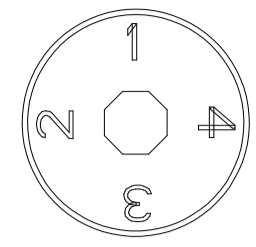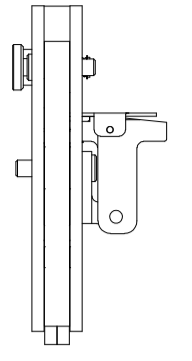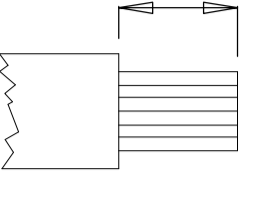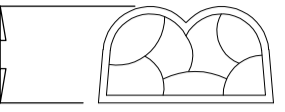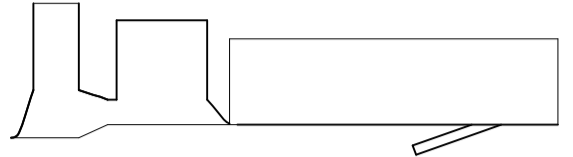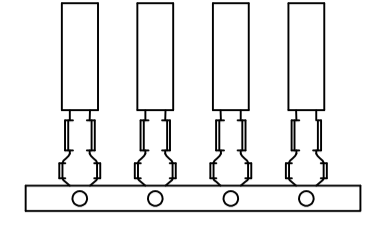

DIMENSIONING AND TOLERANCING PER ASME Y14.5M (ISO STANDARDS).
 THIS DRAWING IS A CONTROLLED DOCUMENT. DRAW NO. 1583009

TOOL NUMBER 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSUL. ADJ. 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 		CONTACT DESCRIPTION	APPLIC. SPECIF.
							LOOSE PIECE 	STRIP FORM 		
1752959-1 1752959-3	1.28-1.42 [16] 1.94-2.15 [14]	2.08-2.64 [.082-.104]	YES	NO	3.60-4.20 [.142-.165]	1.42 ± 0.05 [.056 ± .002] 1.60 ± 0.05 [.063 ± .002]	-	1-1437709-3 1-1437709-6	1.6 MM SYSTEM TERMINAL W/SEAL	N/A
1752960-1 1752960-3	0.50-0.60 [20] 0.81-0.96 [18]	1.40-2.21 [.055-.087]	YES	NO	3.60-4.20 [.142-.165]	1.07 ± 0.05 [.042 ± .002] 1.19 ± 0.05 [.047 ± .002]	-	1-1437709-2 1-1437709-5	1.6 MM SYSTEM TERMINAL W/SEAL	N/A
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE CONNECTIVITY AND ITS AFFILIATES. IT IS NOT TO BE DISCLOSED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION FROM TE CONNECTIVITY.

LOC A
DIST 00

CERTI-CRIMP II DATA SHEET

DWG: M. YOUNGER 21FEB2012		MATERIAL: -		HEAT TREAT: -	
CHK: B.A. WOLFE 22FEB2012		APVD: B.A. WOLFE 22FEB2012			
NAME: B.A. WOLFE		SCALE: -			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		SURFACE TEXTURE: 	
0 PLC ± -		1 PLC ± -		2 PLC ± -	
3 PLC ± -		4 PLC ± -		SCALE: -	
ANGLES: -		SIZE: A1		DRAWING NO: 1583009	
P LTR		REVISION RECORD		DATE	
DWG		APVD		SHEET 2 of 2	
REV		B4		REV	