



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




COAXIAL CABLE SYSTEMS

COAXIAL CABLES


NON-PLENUM
RoHS COMPLIANT

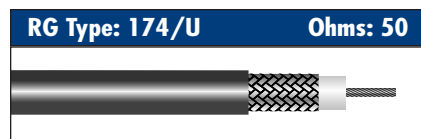


Alpha Part No.: **9174**

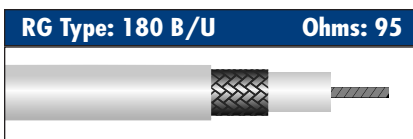


Alpha Part No.: **9180B**

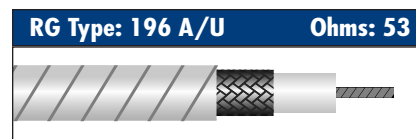


Alpha Part No.: **9196A**

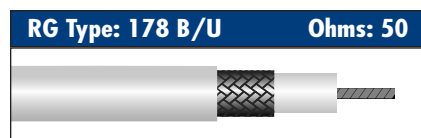


Alpha Part No.: **9178B**

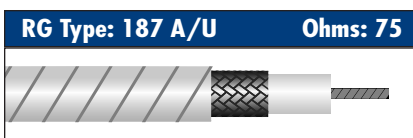


Alpha Part No.: **9187A**

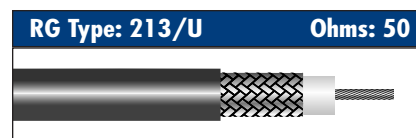


Alpha Part No.: **9213**

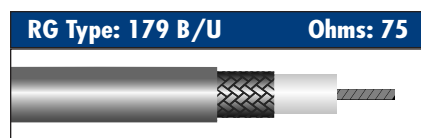

Alpha Part No.: **9179B**

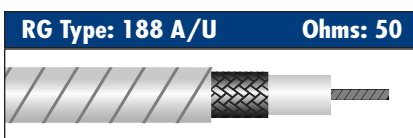

Alpha Part No.: **9188A**

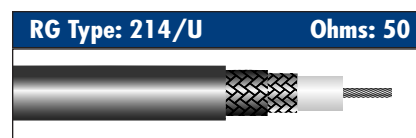

Alpha Part No.: **9214**

PRODUCT DESCRIPTION

Alpha Part No. Type	Inner Conductor			Dielectric		Shield		Jacket		UL Style No.	VP %	Capacitance pF/ft (pF/m)	Specifications
	AWG (mm ²)	Strand (mm)	Mat'l.♦	Mat'l.♦	Diameter In. (mm)	Mat'l.♦	Nom. Cov., %	Mat'l.♦	Diameter In. (mm)				
9174 174/U	26 (0,14)	7/34 (7 x 0,16)	CW	PE	0.060 (1,52)	TC Braid	88	Black V	0.100 (2,54)	1354	66	31.1 (102,0)	—
9178B 178 B/U	30 (0,06)	7/38 (7 x 0,10)	SCW	TFE	0.034 (0,86)	SC Braid	96	Natural FEP	0.071 (1,80)	—	70	28.4 (93,1)	100% Sweep Test @ 5 to 300 MHz ♦♦
9179B 179 B/U	30 (0,06)	7/38 (7 x 0,10)	SCW	TFE	0.063 (1,60)	SC Braid	93	Brown Tint FEP	0.100 (2,54)	—	70	19.6 (64,3)	100% Sweep Test @ 5 to 300 MHz ♦♦
9180B 180 B/U	30 (0,06)	7/38 (7 x 0,10)	SCW	TFE	0.102 (2,59)	SC Braid	93	Natural FEP	0.140 (3,56)	—	70	15.7 (51,5)	100% Sweep Test @ 5 to 300 MHz ♦♦
9187A 187 A/U	30 (0,06)	7/38 (7 x 0,10)	SCW	TFE	0.060 (1,52)	SC Braid	94	White TFE Tape	0.105 (2,67)	—	70	19.5 (64,0)	♦♦
9188A 188 A/U	25 (0,16)	7/0.0067 (7 x 0,17)	SCW	TFE	0.060 (1,52)	SC Braid	94	White TFE Tape	0.106 (2,69)	—	70	28.3 (92,8)	♦♦
9196A 196 A/U	30 (0,06)	7/38 (7 x 0,101)	SCW	TFE	0.034 (0,86)	SC Braid	95	White TFE Tape	0.076 (1,93)	—	70	27.8 (91,2)	♦♦
9213 213/U	13 (1,83)	7/0.0296 (7 x 0,75)	BC	PE	0.285 (7,24)	BC Braid	96	Black NCV	0.405 (10,29)	—	66	30.8 (101,0)	MIL-C-17D Type
9214 214/U	13 (1,83)	7/0.0296 (7 x 0,75)	SC	PE	0.285 (7,24)	Double SC Braid	99	Black NCV	0.425 (10,80)	—	66	30.8 (101,0)	MIL-C-17D Type

♦Refer to Materials Abbreviation Guide on Page 283
♦♦All Polyethylene Jacketed Material is Type III A per MIL-C-17

ATTENUATION LEVELS

■ See Chart on Page 288

SPECIFICATIONS

■ RoHS Compliant



AVAILABILITY

■ See Page 287 for available put-ups

Web Site: www.alphawire.com
Email: info@alphawire.com

Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

