



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




ZEICHNUNG GÜLTIG AB 21/7

Zeichnung geschützt durch
© Copyright 1980
AMP DEUTSCHLAND GmbH
Alle Rechte vorbehalten


Index	Anderung	Tag	Name
2	DGB 2...5 mm ² in 25...6 geändert	26.9.84	And.
3	△△ hinzu	07.05.87	Goe.
4	REVISED PER ECO-09-026444	27NOV09	AEG

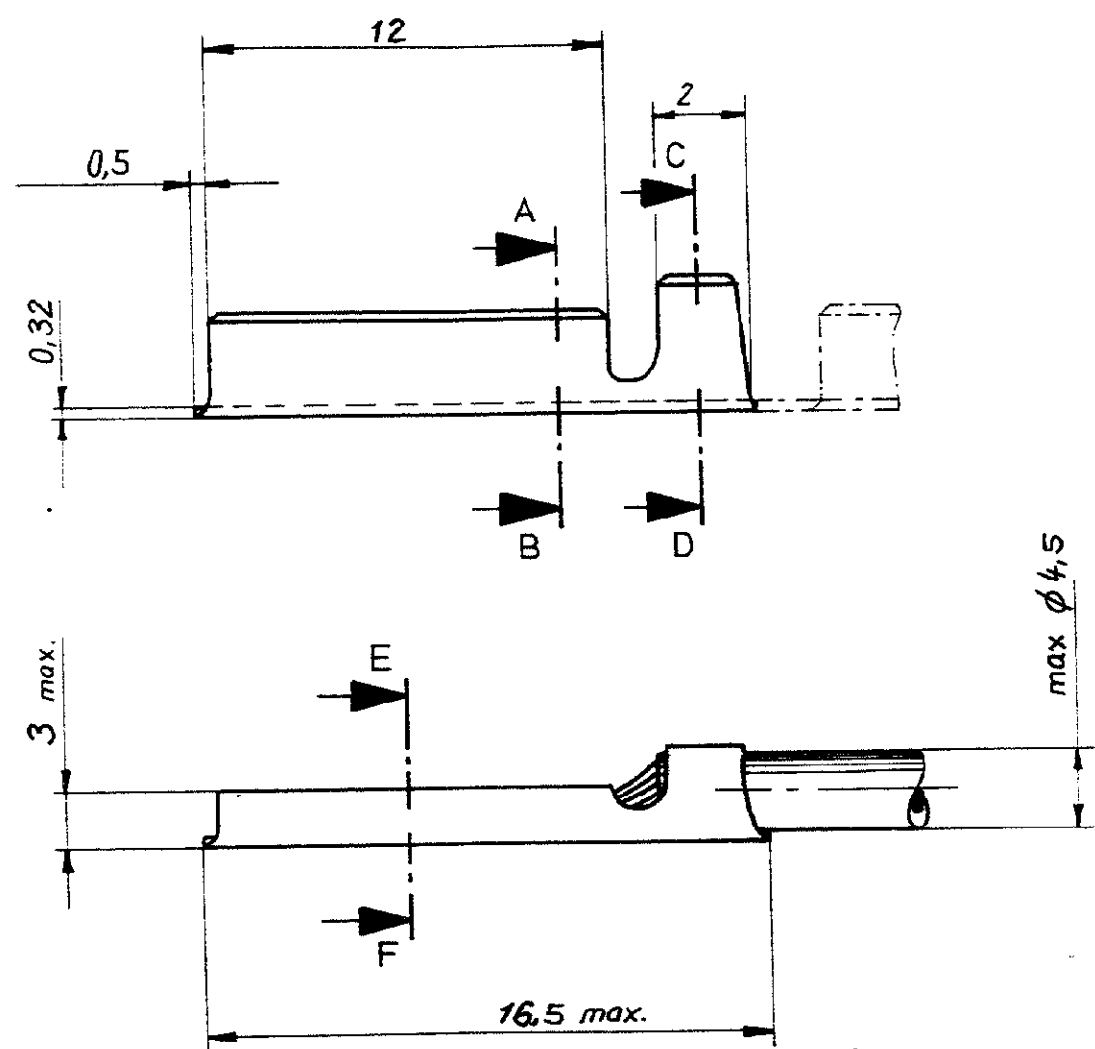

Schnitt A-B

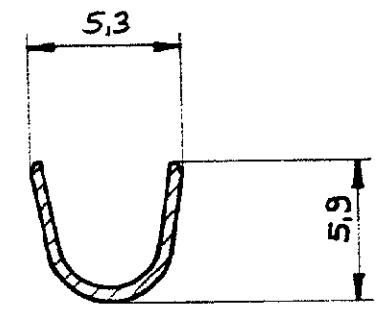

Schnitt C-D




Schnitt E-F

- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 4 Gecrimpt ohne Isolationsumfassung
Draht- und Isolationscrimp werden mit einer durchgehenden Preßbreite (3,6 mm) verarbeitet.
- 3 Reel-Richtung entgegengesetzt der Standard-Version (Einsatz erst nach Rücksprache mit Techn.-Abt.)
- 2 Streifen mit Papierzwischenlage gewickelt
- 1 Streifen ohne Unterbrechung (SPLICE-FREE-Ausführung)

△4	△3	△1	1-926 867 -4	CuZn 30 F53	vorverzinkt
			1-926 867 -3	"	blank
			1-926 867 -2	"	vorverzinkt
			1-926 867 -1	"	blank

△1	△5	OBSOLETE	926 867 -4	Cu Zn 30 F53	vorverzinkt
		OBSOLETE	926 867 -3	"	blank
			926 867 -2	"	vorverzinkt
			926 867 -1	"	blank

DGB: 25...6 mm²
Isol.: max φ 4,5 mm



Benennung		Aderendhülse		K		
Index						
Bestell-Nr.	Werkstoff	Oberfläche Farbe	Nicht tolerierte Maße ± 0,2 mm ± 2 °	Format B	Zeichnungs-Nr. 926 867	Index 4
Gez. 9.4.80 <i>Amella</i>	Gepr.	Gepr.	Maßstab 5:1	Blatt-Nr.		