



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



3M™ PAK 100 SHUNT
 .100" MIDGIE, 929 SERIES

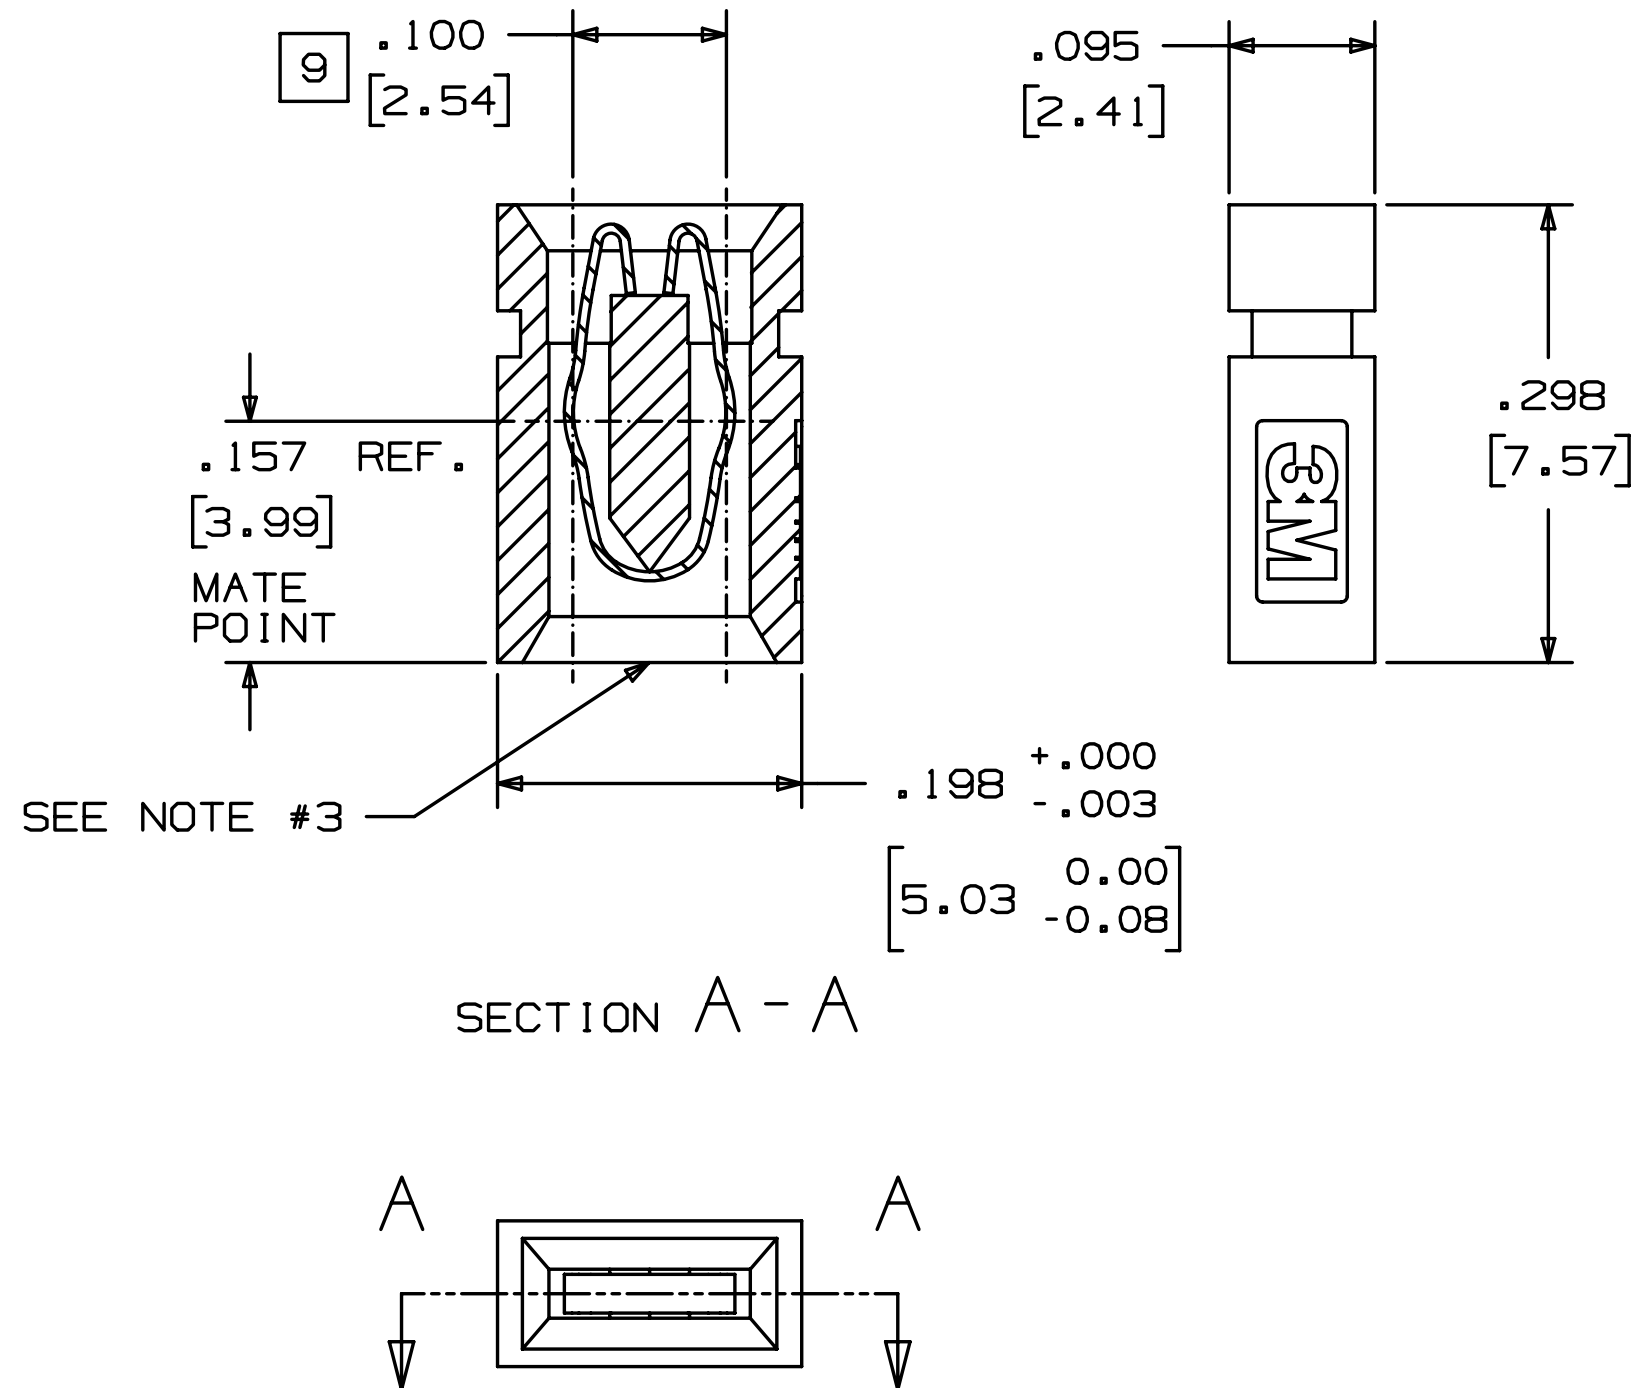

PERFORMANCE [7]	
CURRENT RATING:	1A
INSULATION RESISTANCE:	>1X10 ⁹ OHMS AT 500 VDC
WITHSTANDING VOLTAGE:	1500 V _{rms} AT SEA LEVEL
TEMPERATURE RATING:	-55°C TO +100°C

ORDERING INFORMATION

92995X-XX

COLOR-PLATING OPTIONS:
 0-00 = BLACK-100-200μ" MATTE TIN
 5-06 = BLUE-10μ" GOLD
 7-08 = GRAY-30μ" GOLD

3M™ ELECTRONIC SOLUTIONS DIVISION
 INTERCONNECT SOLUTIONS
<http://www.3M.com/interconnects/>

3M IS A TRADEMARK OF 3M COMPANY.
 FOR TECHNICAL, SALES OR ORDERING
 INFORMATION CALL 800-225-5373

UL®
 UL FILE NO: E68080

NOTES

- MATERIAL:
 BODY: GLASS FILLED POLYESTER (PBT) UL 94 V-0, COLOR CODED BLACK, BLUE OR GRAY
 CONTACT: PHOSPHOR BRONZE.
- GOLD PLATING:
 10μ" OR 30μ" AVG. GOLD ON WIPE AREA OVER 50-80μ" NICKEL.
 MATTE TIN PLATING:
 100-200μ" MATTE TIN ON WIPE AREA OVER 50-80μ" NICKEL.
- RECOMMENDED HEADER PIN ENTRY END. REFERENCE CONTACT SHAPE TO ASSURE CORRECT INSTALLATION.
- RECOMMENDED MATING PINS ARE .025 [.64] ROUND OR SQUARE.
- STACKABLE END-TO-END AND SIDE-TO-SIDE. UNIQUE C-SPRING CONTACT ASSURES BALANCED FORCES.
- SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "RoHS COMPLIANCE" SECTION OF WWW.3MCONNECTOR.COM FOR COMPLIANCE INFORMATION (RIA E1 & C1 APPLY).
- IN THE EVENT OF CONFLICT BETWEEN THIS DATA AND THAT CONTAINED IN THE PRODUCT DATA SHEET, THE PRODUCT DATA SHEET TAKES PRECEDENT.
- REFERENCE PRODUCT DATA SHEET 929957-08.
- MATING PIN CENTERLINES.

DIMENSIONS IN INCHES,
 SECONDARY IN MM

DESIGN REFERENCE	NEXT ASSEMBLY	REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD
DISTRIBUTION CODES		DRFT	CASTIGLIONE	DATE SEP 21, 2011	MFB	DATE
		CHKD		DATE	APPVL	DATE
					S. FELDMAN	SEP 23, 2011
DIVISION	Interconnect Solutions	DIVISION CODE	ISD	© 3M COPYRIGHT 2011 This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.		
DO NOT SCALE DRAWING	SCALE 8/1	TOLERANCES EXCEPT AS NOTED	INCHES .0 ± .01 .00 ± .005 .0000 ± .0005 MILLIMETERS 0 ± .3 .0 ± .13 .000 ± .005			
THIRD ANGLE PROJECTION	INTERPRET PER ASME Y14.5 - 1994	MAX SURFACE ROUGHNESS	TITLE PAK 100 SHUNT, .100 MIDGIE, TS-0200			
<input checked="" type="checkbox"/> ALL SURFACES <input type="checkbox"/> MARKED ONLY	<input checked="" type="checkbox"/> ALL SURFACES <input type="checkbox"/> MARKED ONLY	ANGLES ±	CAGE NUMBER	SIZE	DRAWING NO.	REV.
			78-5100-0200-5	C	929XXX	B
			DET. LISTS	<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO	SHT 1 OF 1	

78-5100-0200-5
 DRAWING NUMBER

B

A