

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









# 930 Series Miniature Bayonet Relampable Lampholders Ø 0.691" (17.5mm)



Relampable lampholders accommodate T-3 1/4 and T-2 incandescent lamps and T-3 1/4 neon lamps















#### **Applications**

- · panel indication
- electrical panels
- entertainment
- industrial


- appliances
- displays

#### **Key Features**

- For panel hole diameter: 0.691" (17.5mm)
- Terminations available: solder lug, screw type or wire leads
- Variety of connection options for fast, easy installation.
- Can be mounted in D shaped holes
- Resistors are available in order to adjust the brightness
- Acommodate T-3 1/4 and T-2 incandescent lamps and T-2 neon lamps

- Available in seven lenses colors (red, green, white, blue, clear, amber and yellow).
- · Robust lampholder assembly
- Drip proof option
- Finish available (lampholders): e-coat black,
  bright nickel, satin chrome or polished chrome
- Lead wire options with custom wire length available.
- · RoHS and REACH Compliant.

#### **Ordering Data**

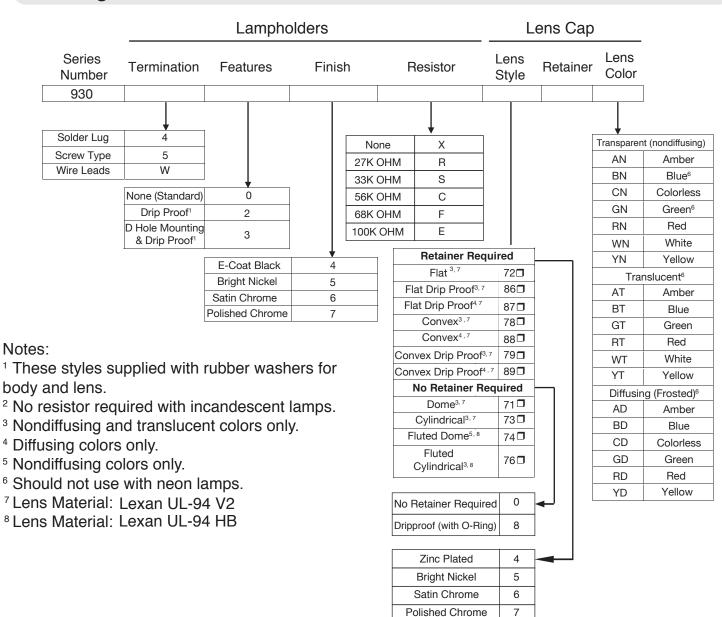

Lampholders and Lens Caps may be ordered separately or as complete assemblies as shown in the example below

## 930424X897RD



Lens

Color

(Red

Diffusing)

Retainer

(Polished


Chrome)


# **Product Specifications**

Materials	
Housing	Brass. E-coat black, bright nickel, polished or satin chrome finishes
Body	High dielectric phenolic
Lockwasher	Phospor bronze. Nickel-plated
Lens	Heat resistant, polycarbonate See notes 7 and 8 on page 2
Hex Nut	Brass. Nickel plated.
Terminals	Solder Lug: Brass, tin plated Screw Type: 4-40 brass, nickel plated binding head screws
Wire Leads	6" Leads, #18 AWG, black & white stranded cooper, PVC insulated, UL/CSA rated 105°C, stripped 1/2". Custom wire options are also available
Retainer	Brass. Zinc plated, bright nickel, polished or satin chrome finishes

Installation Specifications		
Mounting Hole	.651"±.005 (16.5mm±.1)	
D- mounting	.651"±.005 (16.5mm±.1) x	
hole (optional)	.691"±.003 (17.6mm±.1)	
Maximum Rating	3 Watts, 250 Volts	

## **Mounting Holes - Dimensions**





OPTIONAL "D" MOUNTING HOLE

All Dimensions in inches [mm]


# **Compliance and Approvals**







# **Product Dimensions - Housing and Termination**


# Screw Type



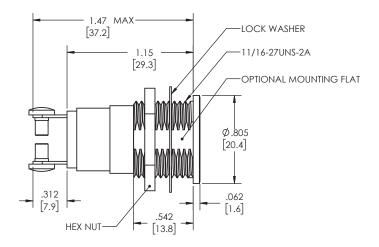


## Solder Lug



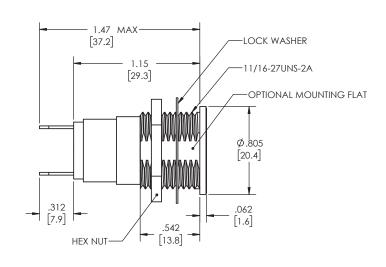

#### Wire Leads

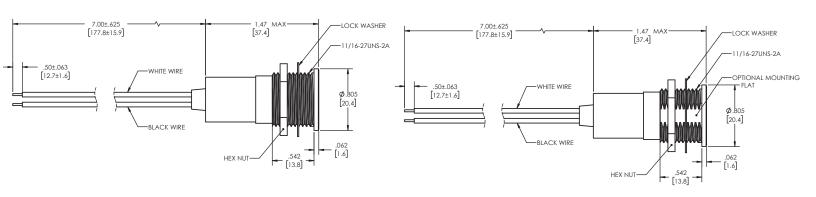

All Dimensions in inches [mm]

### **Product Dimensions - Lens Style**


### Lens Style - Retainer Required


Flat:


Flat Drip Proof:


Convex:

Convex Drip Proof:











## Lens Style - No Retainer Required


Dome:

.440 [11.2] 9/16-27UNS-2A




Dome Fluted:






Cylindrical:






Cylindrical Fluted:






Lens Style - Lampholder features Drip-proof (with O-Ring)


Dome:




Dome Fluted:



Cylindrical:



Cylindrical Fluted:



All Dimensions in inches [mm]

www.vcclite.com

1.800.522.5546 06/17 Rev 1