



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



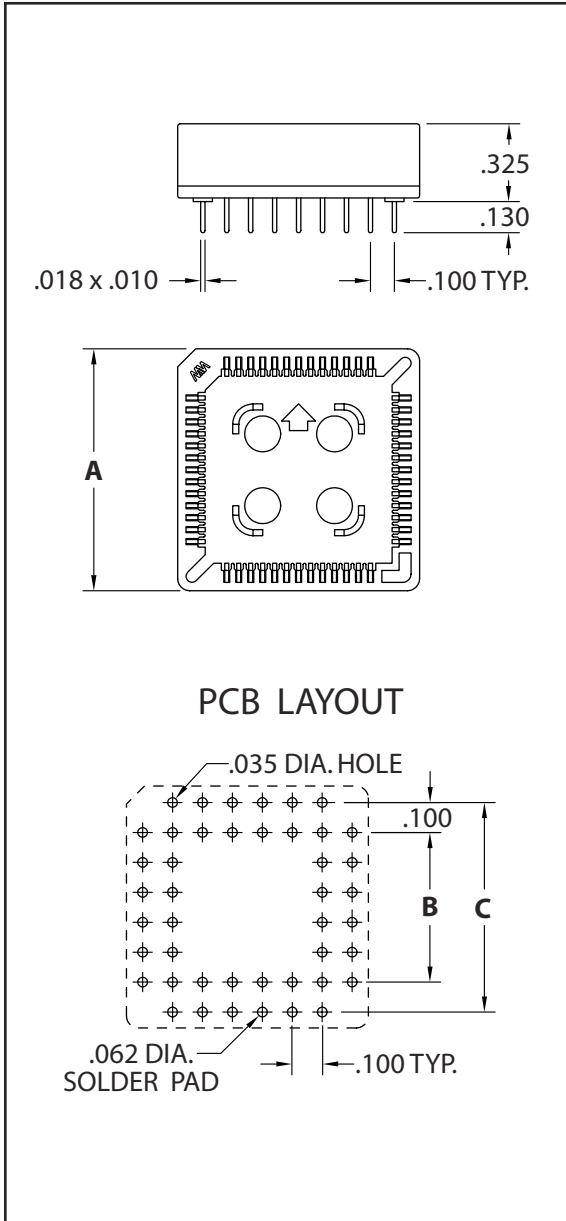

- Note: Not end stackable.
- Accepts JEDEC PLCCs MS-016 & MS-018 leaded plastic substrates.
- Insulator material is glass reinforced PPS.
- Standoffs provide clearance for heat dissipation and cleaning.
- Internal standoffs insure proper positioning of chip carrier in socket.
- Contacts are plated with 150 $\mu$ " tin/lead.
- Pre-lubricated available.

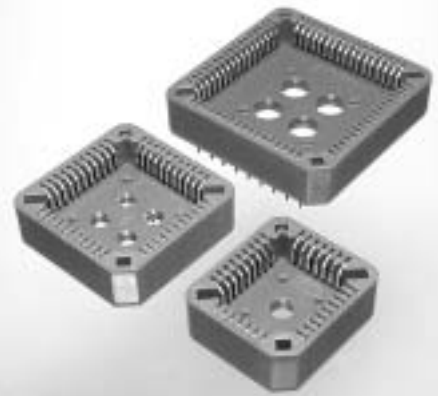

**Application of Pre-Lubricated Sockets:**

Intended as a general-purpose lubricant for tin/lead connectors, Nyetact 502M-20-UV is a solvent dispersion of a water-resistant, non-melting grease based on a plastic-compatible, synthetic hydrocarbon oil. Useful temperature range: -40° to 120°C. The active lubricant is present at 20% (by weight) in mineral spirits.

Pre-lubricated sockets are designed to meet Bellcore GR-1217-CORE specifications.

The pre-lubrication increases the reliability of standard sockets by preventing fretting corrosion.

Pre-lubricated sockets can be used for any long life applications having a tin-tin interface.

There is no degradation of lubrication during soldering or final wash. Contact the factory for other pre-lubricated products.

See page 96 for lubrication specifications.

No. of Cont-acts	A	B	C	Quantity per Tube	Ordering Information	
20	0.613	0.200	0.400	38		940-99-020-24-00X
28	0.713	0.300	0.500	33		940-99-028-24-00X
32*	.813/.713	.400/.300	.600/.500	29	*RECTANGULAR	940-99-032-24-00X
44	0.913	0.500	0.700	26		940-99-044-24-00X
52	1.013	0.600	0.800	23		940-99-052-24-00X
68	1.213	0.800	1.000	19		940-99-068-24-00X
84	1.413	1.000	1.200	16		940-99-084-24-00X
100	1.603	1.200	1.400	25		940-99-100-24-00X

**X = 0** Not Lubricated  
**X = 1** Pre-Lubricated