



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES 95C

6mm x 3.5mm

FEATURES

- Excellent Tactile Feedback
- Thru-hole and Gull Wing Versions
- Surface Mount Versions Compatible with SMT Assembly Including Infrared and Vapor Phase
- Ultraminiature and Lightweight Structure Suitable for High Density Mounting

APPLICATIONS

Used in applications such as consumer electronics, audio equipment, PCs, VCRs, cable boxes, modems, communications equipment, controls, security and alarm equipment, and test and measurement equipment.




Thru-Hole, 160g, Brown Actuator



Gull Wing, 320g, Orange Actuator

DIMENSIONS in inches (and millimeters)

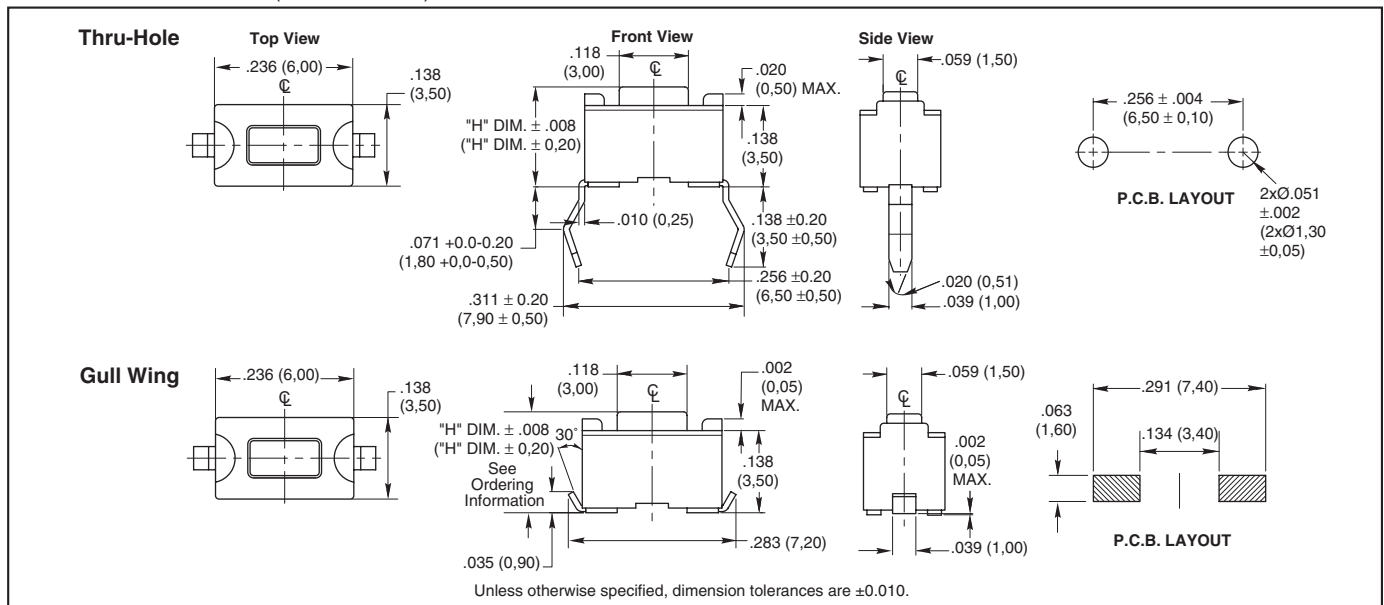

SPECIFICATIONS

Materials

Base: UL94V-0 Nylon thermoplastic
Cover: Stainless steel
Actuator: UL94V-0 Nylon thermoplastic
Terminal: Brass with silver-plating
Contact: Stainless steel with silver-plating

Electrical


Rating: 50mA, 12 Vdc
Life: 50,000 cycles
Actuator Travel: .010" + .008"/ - .004"
Contact Resistance: 100 m Ω max.
Insulation Resistance: 100 M Ω min at 500Vdc

Dielectric Strength: No dielectric breakdown after 250V after one minute
Contact Arrangement: single pole, single throw

Environmental

Operating Temperature Range: -25 to 70°C
Storage Temperature Range: -30 to 80°C
Mechanical Shock: MIL-STD-202F, Method 213B, Test Condition A. Gravity: 50G (peak value), 11 msec. Direction and times: 6 sides and 3 times in each direction. High reliability.

CIRCUITRY

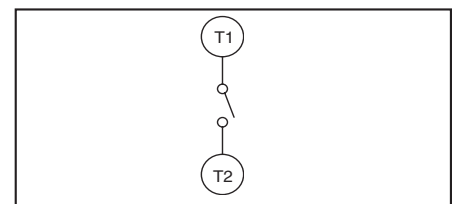

Vibration: MIL-STD-202F, Method 201A. Passed 6 hours (2 hours in each) of three perpendicular planes at a cycle of 10-55-10Hz/minute.

Soldering Process

Hand Soldering: Use a soldering iron of 30 watts, controlled at 350°C for 5 seconds maximum while applying solder.
Reflow Soldering (surface mount versions only): Peak temperature 260°C (500°F).
Wave Soldering: 260°C (500°F) max. for 5 seconds. Subject to P.C.B. .063 in. (1,6mm) thickness.

Packaging

Thru-Hole: 135 pcs/tube. Surface Mount: 135 pcs/tube, 1800 pcs/reel (.169" height), 1600 pcs/reel (.197" height).

ORDERING INFORMATION

<p>95C04A3GWRT</p>	Series	Series
	Size:	04 = 3.5mm x 6mm
	Height ("H"):	A = .169 (4,30), B = .197 (5,00)
	RoHS compliant	RoHS compliant
	Packaging:	Blank = Tube, R = Tape and Reel (see pkg note)
	Terminal Style:	Blank = Thru-Hole, GW = Gull Wing
Operating Force:	3 = 160g (brown), 5 = 320g (orange)	

Available from your local Grayhill Component Distributor.

For prices and discounts, contact a local Sales Office, an authorized local distributor, or Grayhill.