



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CUSTOMER DRAWING

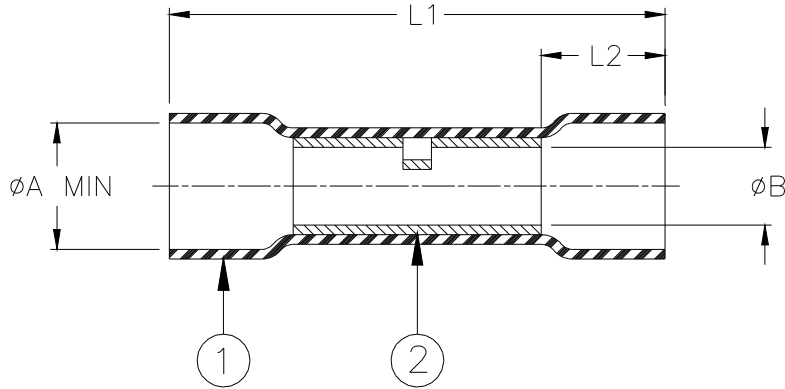

Product Name	Color	Marking	Size Range mm ² (AWG)	L1 ±1.50 [±0.06]	L2 min	øA*		øB min	Wire Strip Length Nom.
						(a) min	(b) max		
D-406-0034	Yellow	DURASEAL [®] 24-26	0.15 - 0.25 (26 - 24)	31.5 [1.24]	5.0 [0.20]	3.00 [0.118]	1.40 [0.055]	1.09 [0.043]	6 to 8 (1/4 to 5/16)
D-406-0001	Red	DURASEAL [®] 18-22	0.5 - 1.0 (22 - 18)	31.5 [1.24]	5.0 [0.20]	3.70 [0.146]	1.40 [0.055]	1.47 [0.058]	6 to 10 (1/4 to 3/8)
D-406-0002	Blue	DURASEAL [®] 14-16	1.5 - 2.5 (16 - 14)	31.5 [1.24]	5.0 [0.20]	4.60 [0.181]	2.00 [0.080]	2.33 [0.092]	6 to 10 (1/4 to 3/8)
D-406-0003	Yellow	DURASEAL [®] 10-12	3.0 - 6.0 (12 - 10)	37.5 [1.48]	10.0 [0.39]	6.50 [0.255]	2.80 [0.110]	3.50 [0.138]	10 to 13 (3/8 to 1/2)

MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked polyamide (Nylon) with a polyamide-based hot-melt adhesive liner. See above table for applicable sleeve color.
- CRIMP SPLICE: Tin-plated copper alloy.
BASE METAL: Copper alloy C11000 per ASTM B152.
PLATING: Tin-plated per ASTM B545, Class A.

APPLICATION

- These parts may be used to obtain an environment-resistant one-to-one in-line (butt) splice in wires meeting the size range and diameter restraints specified herein and having a temperature rating of not less than 85°C.
- * øA: (a) Minimum diameter as received: Wire insulation diameter must be less than this value.
(b) Maximum diameter after recovery: Wire insulation diameter must be larger than this value to obtain an environment resistant splice.
- Wires are to be stripped per table, inserted into opposite ends of the crimp barrel, crimped with a TE Connectivity AD-1522 (22-10 AWG) or equivalent. For D-406-0034, Pro-Crimper III with die set 1976356-1 (24-22 AWG) or equivalent may be used. The sleeve must be heated along its entire length until the crimp marks are gone and the ends of the sleeve recover onto the wires.
- Spliced assemblies will meet the requirements of TE Connectivity / Raychem specification RB-107.
- Except for D-406-0034, all of the parts covered by this drawing are UL Listed (US and CANADA), File #E87681.

		TE Connectivity 300 Constitution Dr Menlo Park, CA 94025, U.S.A.		TITLE: DURASEAL CRIMP SPLICE ENVIRONMENT RESISTANT				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			Raychem Devices		DOCUMENT NO.: D-406-00XX			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			REV: C1		DATE: 15-APR-11	
DRAWN BY: P.TALLY	CAGE CODE: 06090	REPLACES: D060233	ECO NUMBER: EC0-11-005139		SCALE: NTS	SIZE: A	SHEET: 1 of 1	