



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Hi-Flex Motor Power Cable

NEED CUSTOMS?
See Page 25

- Ideal for Hi-Flex Servo Power Applications
- Rated for More Than 10 Million Flexing Cycles
- 4 Power Conductors in Shielded and Unshielded Versions

Cicoil's line of Hi-Flex Motor Cables provides the advantages of all Cicoil flexible flat cables in a standard, low-cost package. Ultra-flexible, finely stranded wire conductors are used for maximum flexibility and long life in dynamic, flexing applications. Shielded conductors add tinned copper braiding over PFA insulation. Cicoil's patented extrusion process encapsulates the wire conductors in a crystal clear, flexible, yet extremely durable insulation.

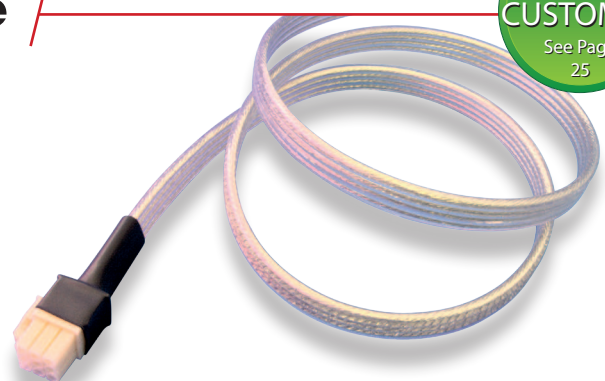

Applications
Linear, Servo and Stepper Motors, AC and Variable Frequency Drives

Cable

	Amp Rating ¹	Volts DC	Conductor Gauge	Dimensions [inches]		Part Number
				Width	Height	
Non-Shielded	7	12,000	24 AWG	0.27	0.09	969M101-24-4-MC
	8	18,000	22 AWG	0.32	0.11	969M101-22-4-MC
	10	18,000	20 AWG	0.36	0.12	969M101-20-4-MC
	15	20,000	18 AWG	0.43	0.14	969M101-18-4-MC
	19	20,000	16 AWG	0.48	0.15	969M101-16-4-MC
	27	20,000	14 AWG	0.61	0.19	969M101-14-4-MC
	36	20,000	12 AWG	0.75	0.24	969M101-12-4-MC
	47	20,000	10 AWG	0.92	0.29	969M101-10-4-MC
	65	20,000	8 AWG	1.26	0.35	969M101-8-4-MC
	95	20,000	6 AWG	1.47	0.40	969M101-6-4-MC
Shielded	125	20,000	4 AWG	1.77	0.47	969M101-4-4-MC
	7	12,000	24 AWG	0.36	0.12	969M101-24-4-SMC
	8	18,000	22 AWG	0.41	0.13	969M101-22-4-SMC
	10	18,000	20 AWG	0.45	0.14	969M101-20-4-SMC
	15	20,000	18 AWG	0.52	0.16	969M101-18-4-SMC
	19	20,000	16 AWG	0.57	0.17	969M101-16-4-SMC
	27	20,000	14 AWG	0.70	0.21	969M101-14-4-SMC
	36	20,000	12 AWG	0.84	0.26	969M101-12-4-SMC
47	20,000	10 AWG	1.01	0.31	969M101-10-4-SMC	

Notes

1. Amp rating is the maximum value for each conductor at room temperature of 70°F (21°C). Amp rating decreases as temperature increases.


Wire Gauge	Power Connector (P1)
22-24	Tin Contacts - TE, P/N 770902-1; 9-Pos Housing - TE, P/N 172169-1
16-20	Tin Contacts - TE, P/N 171639-1; 9-Pos Housing - TE, P/N 172169-1
14	Gold Contacts - MOLEX, P/N 02-09-6110; 9-Pos Housing - MOLEX, P/N 3092092
4-10	Ring Lugs - Typical

Cable Specifications

All engineering values are nominal and subject to change.

Mechanical	Environmental
Conductors: Ultra flexible, finely stranded, tinned copper	Temperature Rating: -65°C to +165°C
Shielding: Ultra flexible, braided shields, with 90% nominal coverage	Moisture Rating: Submersible, Salt Water Resistant
Minimum Bend Radius: - 6x cable height for intermediate flex - 10x cable height for continuous flex	Clean Room Rating: Class 1, Zero Particulates
Flex Life: 10,000,000 cycles nominal	Extreme Environments: Sunlight, UV Light, Alcohol, Chemical and Oil Resistant
Outer Jacket Durometer Rating: 65 (Shore A)	Electrical
	Outer Jacket Dielectric Strength: 450 volts/mil (17.7 kv/mm)
	See Electrical Rating Chart on Page 47

Dimensions

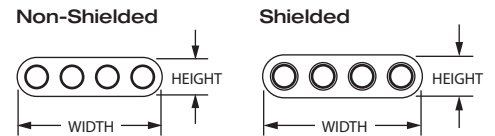

Cable Assemblies



Please contact Cicoil for other connectors and length options.

Cable Length (feet)	Part Number Addition
3	-CA003
6	-CA006
12	-CA012

Notes

1. Append onto base cable Part Number for complete assembly. Example: 969M101-24-4-MC-CA003
2. Connector ratings may differ from cable ratings; refer to manufacturer specifications.

Assembly Dimensions



Connectors

• See Table to the left

Options

Page

Additional Conductors	26
Low Friction Options	28
StripMount™ Integrated Mounting Strip	28
Integrated Tubing	29
SuperTuff™ Jacket	29
Colored Jacketing	29
Strip and Tin Cable Ends	29
FlexRail™ Self-Supporting Cable	30
Complete Assembly	31