

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








## DESCRIPTION: 975 SERIES D-SUB BACKSHELL

## **BACKSHELL KIT INCLUDES:**

- (2) BACKSHELL HAVLES
- (2) 4-40 THUMBSCREWS
- (2) HOUSING SCREWS
- (1) STRAIN RELIEF CLAMP
- (2) STRAIN RELIEF SCREWS
- (2) CABLE SLOT SHUT-OFFS (9 POS HAS NONE)

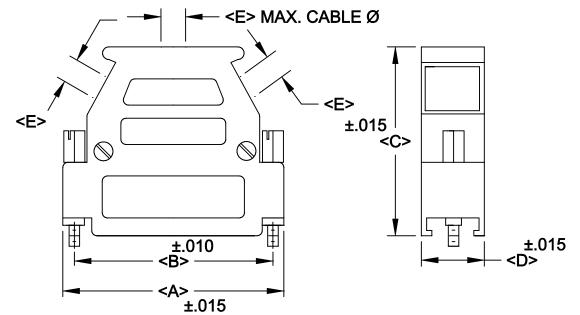

9	975-YYY-020R121		
SERIES —			
POSITIONS —			
009			
015 025			
Ŏ <del>3</del> 7			
MATERIAL ————			
020 = METALIZED PLAS	STIC		
COLOR:			
12 = NICKEL OVER CO	PPER		
PUT-UPS —			
1 = KIT			

( 9 POS DOES NOT HAVE SIDE ENTRIES)

POS	6. A	В	С	D	Ε
9	1.213	.984	1.800	.600	.300
	30.81	24.99	45.72	15.24	7.62
15	1.541	1.312	1.800	.600	.335
	39.14	33.32	45.72	15.24	8.51
25	2.088	1.852	1.800	.600	.375
	53.04	47.04	45.72	15.24	9.53
37	2.735	2.500	1.800	.600	.400
	69.47	63.50	45.72	15.24	10.16

PLASTIC: ABS POLYLAC U.L. 94V-O PLATING: NICKEL OVER COPPER

THUMBSCREWS: STEEL HOUSING SCREWS: STEEL

OPERATING TEMP: -30°C TO +90°C

**RoHS COMPLIANT** 

