



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## DIN-Rail Receptacles

These modules are intended for use within cabinets and enclosures as 120 VAC outlets for power tools, lights, computers or test equipment for troubleshooting.


- Compact and easily snaps onto 35mm DIN-rail
- CSA, UL508A and cULus approved
- Available with ground fault current interrupt (GFCI) or standard simplex and duplex outlets
- Option for visual indication of power included with GFCI versions
- Enclosed versions feature NEMA rated enclosure with UL94 VO flammability rating



Schematic diagram



Schematic diagram

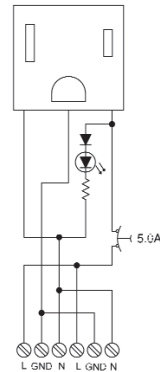



### Rated data

#### Input voltage

Rated current	120Vac
	5A max via outlet
	10A via redundant terminals
Wire range	26 - 12 AWG (0.14 0 4.0mm <sup>2</sup> )

#### Ordering data

TS32 / TS35 mounting (  /  )	
--	--

#### Dimensions

Width	35mm
Length	70mm
Height	55mm

#### Approvals

® LR-229352, © E252394

Rated current	120Vac
	5A max via outlet
	10A via redundant terminals
Wire range	26 - 12 AWG (0.14 0 4.0mm <sup>2</sup> )

#### Ordering data

Single outlet with circuit breaker	<b>9915480001</b>
(supplemental protector with manual reset via push button)	

Width	35mm
Length	70mm
Height	55mm

® LR-229352, © E252394

### Trip Curves

