



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



120mm sq.

San Ace 120W



General Specifications

- Material Frame: Aluminum,
Impeller: Plastics (Flammability: UL94V-1)
- Expected Life Refer to specifications (Indoor, L10: Survival rate: 90% at 60°C ,
rated voltage, and continuously run in a free air state)
- Lead Wire ⊕red ⊖black (Sensor) yellow (Control) brown
- Storage Temperature -30°C to +70°C (Non-condensing)

120×120×38mm (Mass : 440g) **IP 68** **9WV type**

Specifications

The following nos. **have PWM controls and pulse sensors.**


Model No.	Rated Voltage [V]	Operating Voltage Range [V]	PWM duty cycle* [%]	Rated Current [A]	Rated Input [W]	Rated Speed [min ⁻¹]	Max. Airflow [m ³ /min] [CFM]	Max. Static Pressure [Pa] [inchH ₂ O]	SPL [dB(A)]	Operating Temperature [°C]	Expected Life [h]
9WV1212P1J001	12	10.2 to 13.8	100 0	3 0.2	36 2.4	6,400 1,500	6.35 224.0 1.49 52.6	360 1.45 19.8 0.080	64 33	-20 to +70	60,000/60°C
9WV1224P1J601	24	20.4 to 27.6	100 0	1.5 0.12	36 2.88	6,400 1,500	6.35 224.0 1.49 52.6	360 1.450 26.1 0.105	64 33		
9WV1224P1H001 ^(Note)			100	0.80	19.2	5,200	5.16 182	237 0.95	58		
9WV1248P1J001	48	40.8 to 55.2	100 0	0.65 0.06	31.2 2.88	6,400 1,500	6.35 224.0 1.49 52.6	360 1.45 26.1 0.105	64 33		

Note: Fan does not rotate when PWM duty cycle is 0%.

※PWM Frequency : 25kHz

Other sensor specifications are available as options. Please refer to the index (p. 513).


Dimensions (unit: mm)

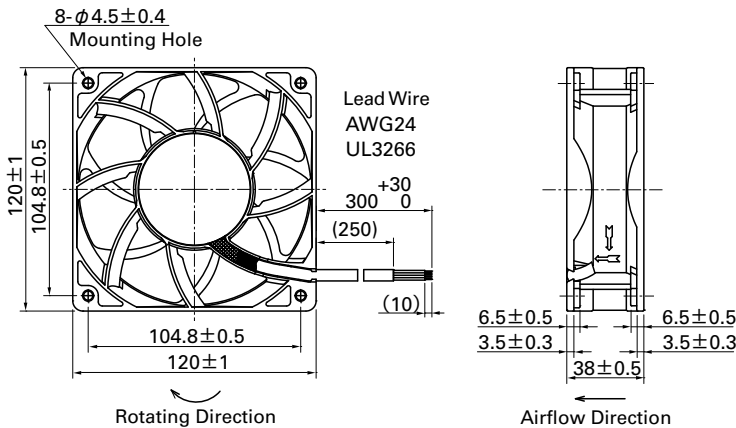

Options (unit: mm)


Finger Guards

Model : 109-019C Surface treatment : Nickel-chrome plating (silver)
: 109-019H : Cation electropainting (black)




Model : 109-019E Surface treatment : Nickel-chrome plating (silver)
: 109-019K : Cation electropainting (black)

Inlet side, Outlet side




Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

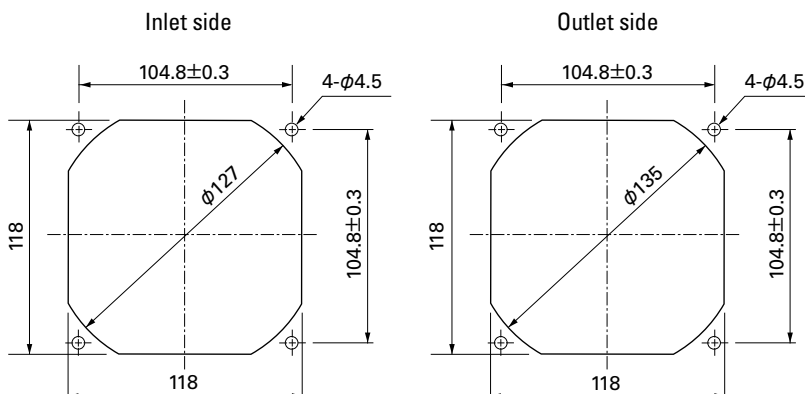

Options (unit: mm)

Resin Finger Guards


Model : 109-1000G

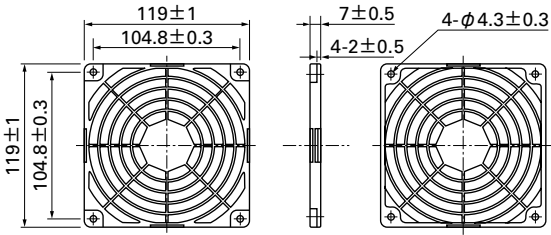


Mass : 23g

Airflow - Static Pressure Characteristics


PWM Duty Cycle

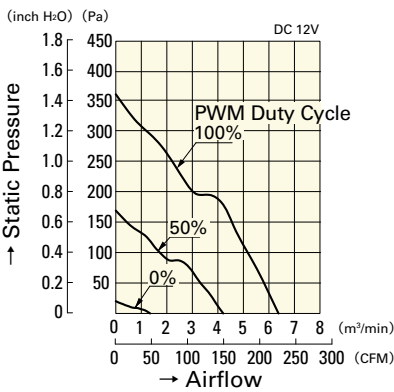

9WV1212P1J001

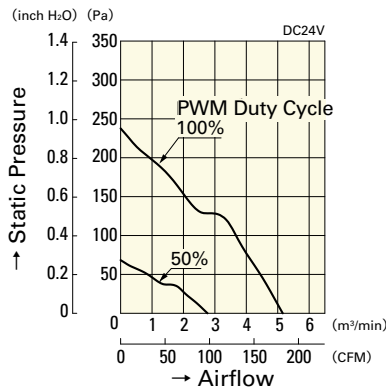


9WV1224P1H001

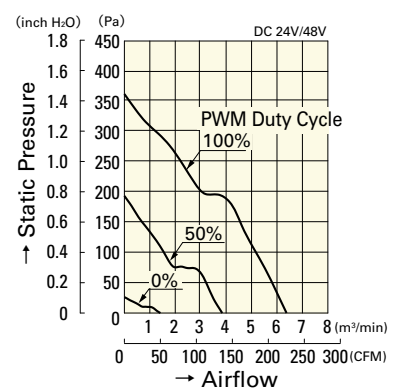


9WV1224P1J601
9WV1248P1J001


Operating Voltage Range

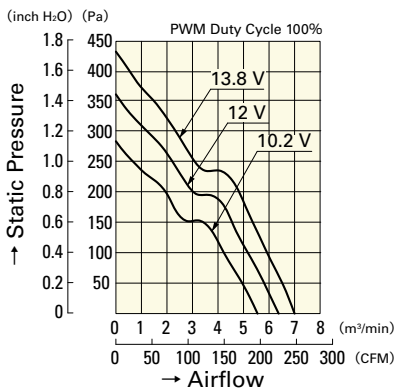

9WV1212P1J001

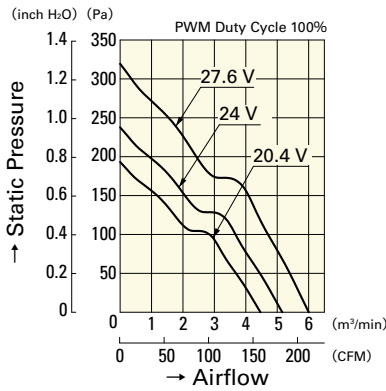


9WV1224P1H001

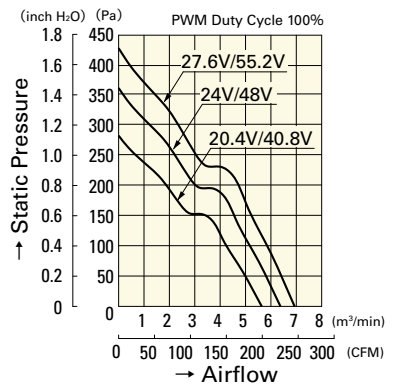


9WV1224P1J601
9WV1248P1J001


PWM Duty - Speed Characteristics Example

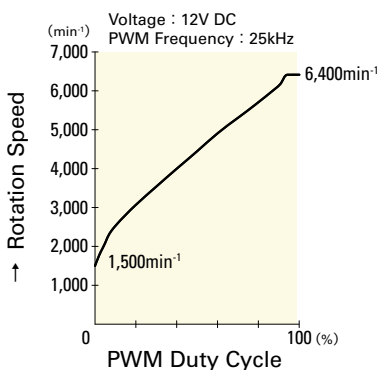

9WV1212P1J001

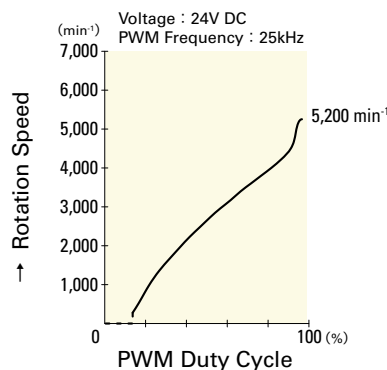

9WV1224P1H001

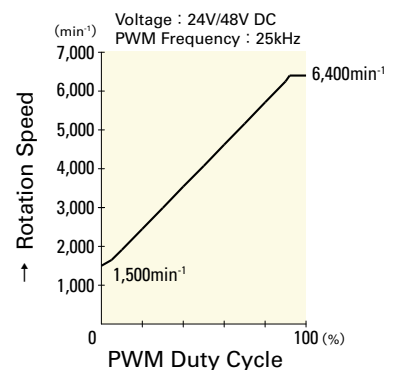

9WV1224P1J601
9WV1248P1J001