



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us






Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1 2 3 4 5 6 7

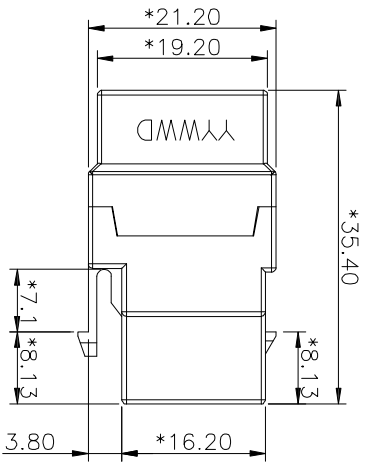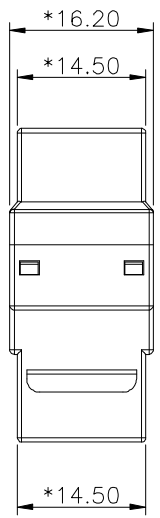

LOGO ABOVE THE SURFACE 0.20mm



ELECTRICAL:

- 1. VOLTAGE RATING : 125 VAC.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 100 MEGOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN. @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 750 VAC 60HZ, 1MIN.

MECHANICAL:

- 1. HOUSING MATERIAL : PC, UL94V-0, BLACK
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
- 3. PLATING : 50U" GOLD PLATING OVER NICKEL.
- 4. INSERT MATERIAL : GLASS FILLED POLYESTER UL94V-0.
- 5. PCB MATERIAL : FR-4 THICKNESS 1.6mm.

ENVIRONMENTAL:

- 1. STORAGE : -40°C TO +85°C.
 - 2. OPERATION : 0°C TO +70°C.
- ① Conforming to TIA/EIA 568B 2-1

RoHS compliant
Unit: mm



File No.: E345352

Scale	Free								
TOLERANCE									
.X	±0.20			Drawn	22.09.2014	Joanna			
.XX	±0.15			Approved	24.03.2017	Amy			
.XXX	±0.10	②	Add UL		24.03.2017	Any			
DIM Angle	TOL ±5°	①	Add information		16.02.2015	Hellwig			
		①	Drawn		22.09.2014	Joanna			
			Id.	Modification					

ASSMANN
components

ASSMANN WSW-No. A-TA3535
Drawing-No. ASS 6588 CO rev02

Replace Sheet