



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.





ISSUE NUMBER	(1)
ORIGINAL	
PCB LAYOUT ORIENTATION	(4)
UPDATED	
R.STA.MONICA MAY.18/2010	
REMOVE LEAD IN NOTES	(5)
RoHS COMPLIANT	
R.STA.MONICA MAY.20/2010	
5.75 WAS 5.60, 15.60 WAS 15.80	
56.0 WAS 55.90, REVISED	(6)
NOTES: PCB Ø1.60 WAS Ø1.70	
R.STA.MONICA JUN.07/2010	

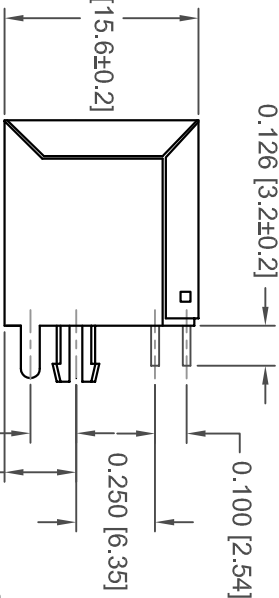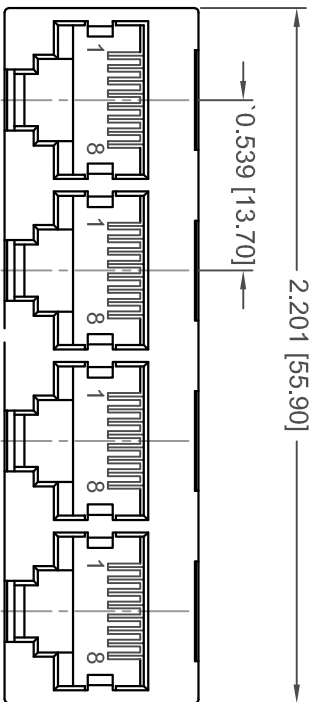

GOLD PLATING PART NUMBER:

- A00-432-222-450 GOLD FLASH
- A00-432-322-450 15 MICRONS OF GOLD
- A00-432-622-450 30 MICRONS OF GOLD
- A00-432-922-450 50 MICRONS OF GOLD

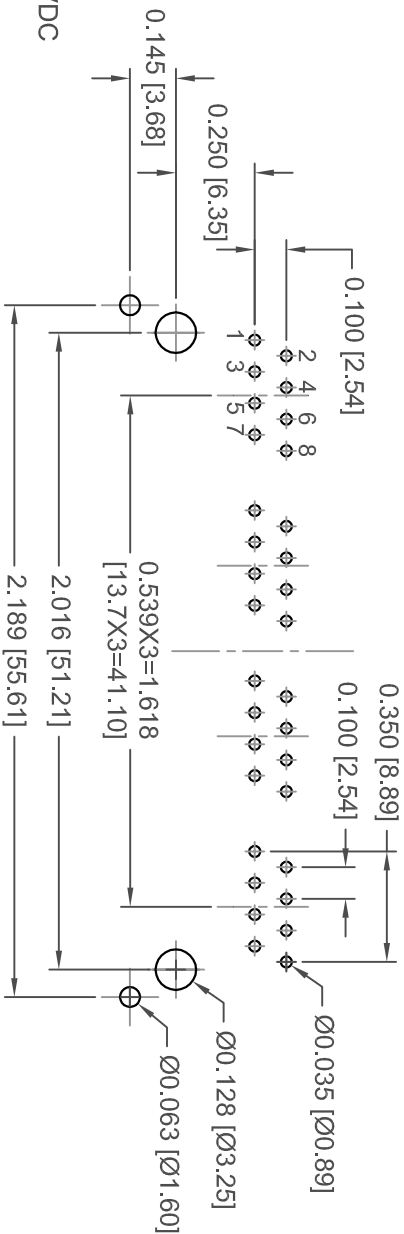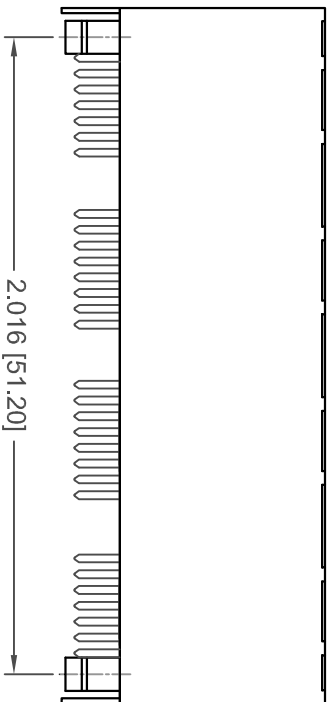

RECOMMENDED P.C. BOARD LAYOUT



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES 2002/95/EC
AND 2002/96/EC FOR RoHS COMPLIANCY.

NOTES

ELECTRICAL CHARACTERISTICS:

- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 500 MEGOHMS MIN. @ 500 VDC
- DIELECTRIC STRENGTH: 1000 VAC, 50HZ, 1 MIN
- CURRENT RATING: 1.5 AMP
- VOLTAGE RATING: 125 VAC RMS
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F

MATERIAL AND FINISH:

- BODY: GLASS FILLED POLYESTER, UL94V-0 RATED
- CONTACTS: PHOSPHOR BRONZE(0.46mm DIA.) GOLD PLATING ON CONTACTS AS PER PART NO. (SEE GOLD PLATING PART NO.)
- SHIELD: COPPER ALLOY PLATED WITH NICKEL
- OPERATING LIFE: 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER: 1 LB MIN
- TOLERANCE FOR ALL DIMENSIONS IN MM IS ±0.15, UNLESS OTHERWISE SPECIFIED

4 PORTS, 8 POSITIONS VERTICAL
SHIELDED PCB JACK (GROUND AT FRONT)

TOLERANCE UNLESS NOTED	± 0.01	AGE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	SCALE: N.T.S
YOUR CONNECTION TO QUALITY & SERVICE	± 0.006		DRAWING NUMBER
	± 0.003		A00-432-222-450
			SHEET 1 OF 1
			ISSUE
			6