



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER	DESCRIPTION
①	ORIGINAL
②	HOUSING MATERIAL WAS PBT POLYESTER F. BRIONES JULY 8/05
③	DIM.:260 WAS .311 F. BRIONES MAY12/08
④	PIN LOCATIONS ADDED F. BRIONES OCT.07/10
⑤	PT NOS. ON TABLE WAS A00- F. BRIONES JAN.2/1/11
⑥	DWG. UPDATED F. BRIONES MAY 02/11
⑦	ADD ELECTRICAL RATING R.STAMONICA OCT.15/14

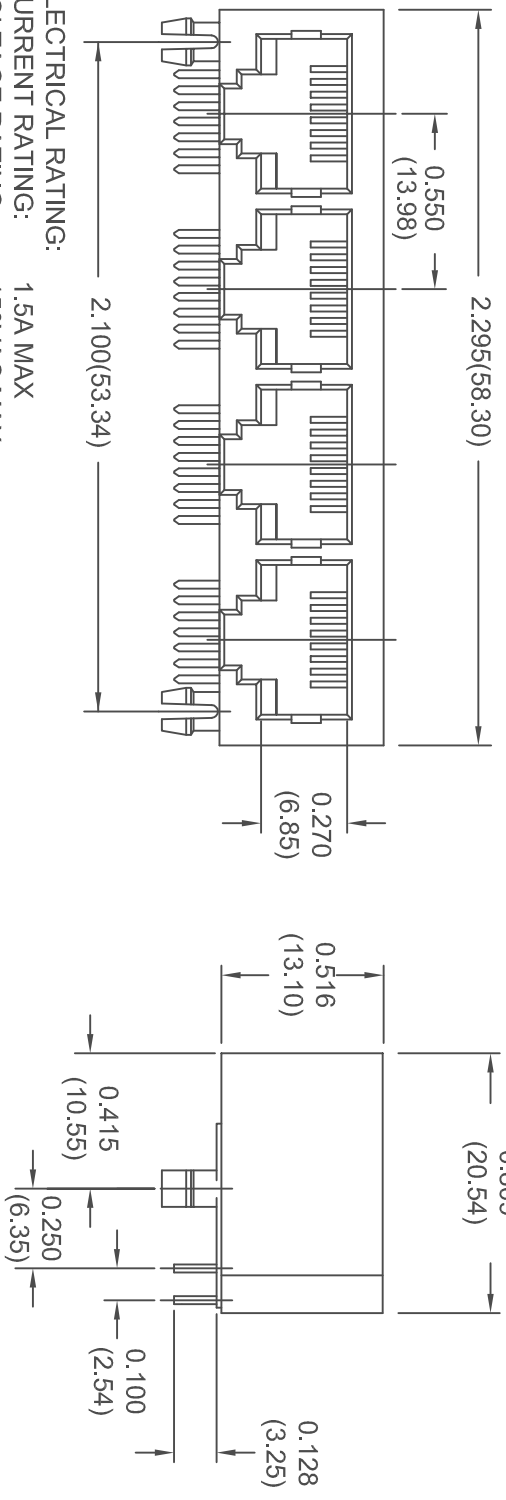

ELECTRICAL RATING:
CURRENT RATING: 1.5A MAX
VOLTAGE RATING: 150VAC MAX
WITHSTANDING VOLTAGE: 1500V AT 60HZ, 1 MINUTE
INSULATION RESISTANCE: 500 MEGOHM MIN
CONTACT RESISTANCE: 40 MILLIOHM MAX
OPERATING TEMPERATURE: -40°C TO +85°C

SOLDERABILITY:
SOLDER BATH TEMPERATURE: 245°C ± 5°C
SOLDER IMMERSION TIME: 5 ± 0.5 SEC

MATERIAL AND FINISH:
HOUSING: PBT POLYESTER G/F UL94V-0, COLOR BLACK
CONTACTS: PHOSPHOR BRONZE
SELECTIVE GOLD PLATING ON CONTACT AREA AND
GOLD FLASH PLATING ON SOLDER TAIL

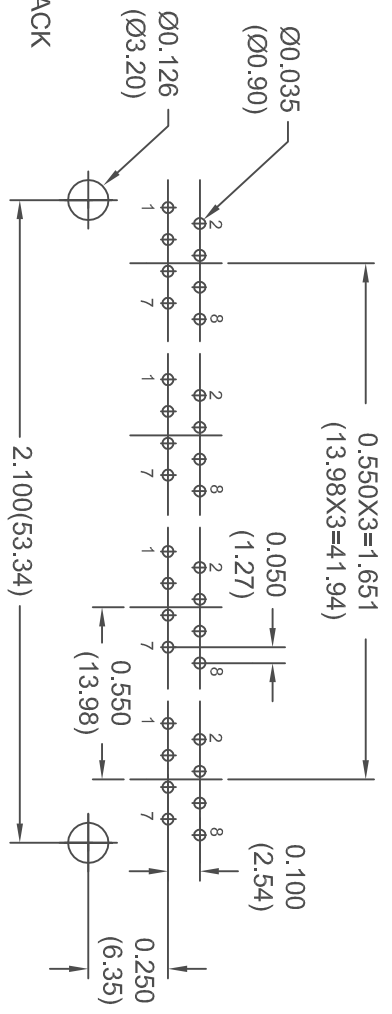

PC BOARD LAYOUT



THIS SERIES FULLY CONFORMS TO THE
EUROPEAN UNION DIRECTIVES
2011/65/EU FOR RoHS COMPLIANCY.

PART NUMBER **GOLD PLATING**

A00-432-260-450 GOLD FLASH
A00-432-360-450 15 MICRONS OF GOLD
A00-432-660-450 30 MICRONS OF GOLD
A00-432-960-450 50 MICRONS OF GOLD

CAVITY CONFORMS TO FCC RULES AND
REGULATIONS PART 68, SUBPART F

4 PORTS, 8 POSITIONS R/ANGLE PCB JACK

EDAC INC
TORONTO, ONTARIO
CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS
ARE THE PROPERTY OF EDAC INC. AND
SHALL NOT BE REPRODUCED OR COPIED
OR USED AS THE BASIS FOR THE
MANUFACTURE OR SALE OF APPARATUS
WITHOUT WRITTEN PERMISSION.

ACAD REF. DRAWING:	A00-432-260-450
DRAWN: F. BRIONES	DATE: MAR. 12/03
PART NUMBER	
DRAWING NUMBER	
A00-432-260-450	
ISSUE	9

SEE TABLE