



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






Technical Data Sheet

3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

■ Features :

- Low power consumption  
High efficiency and low cost
- Good control and free combinations  
on the colors of LED lamps
- Good lock and easy to assembly
- Stackable and easy to assembly
- Stackable vertically and easy to assembly
- Versatile mounting on P.C board or panel
- Stackable horizontally and easy to assembly
- Pb free
- The product itself will remain within RoHS compliant version



■ Descriptions :

- ARRAY=Plastic Holder+Combinations of Lamps
- The array will easily mount the applicable lamps on any panel up to

■ Applications :

- 1.Used as indicators of indicating the Degree, Functions, Positions etc, in electronic instruments.

LED PART NO.	Chip		Lens Color
	Material	Emitted Color	
264SYGD/S530-E2/F45-74	AlGaInP	Super Yellow Green	Green Diffused
264SDRD/S530-A3/F45-75	AlGaInP	Super Deep-Red	Red Diffused




Technical Data Sheet

3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

Package Dimensions

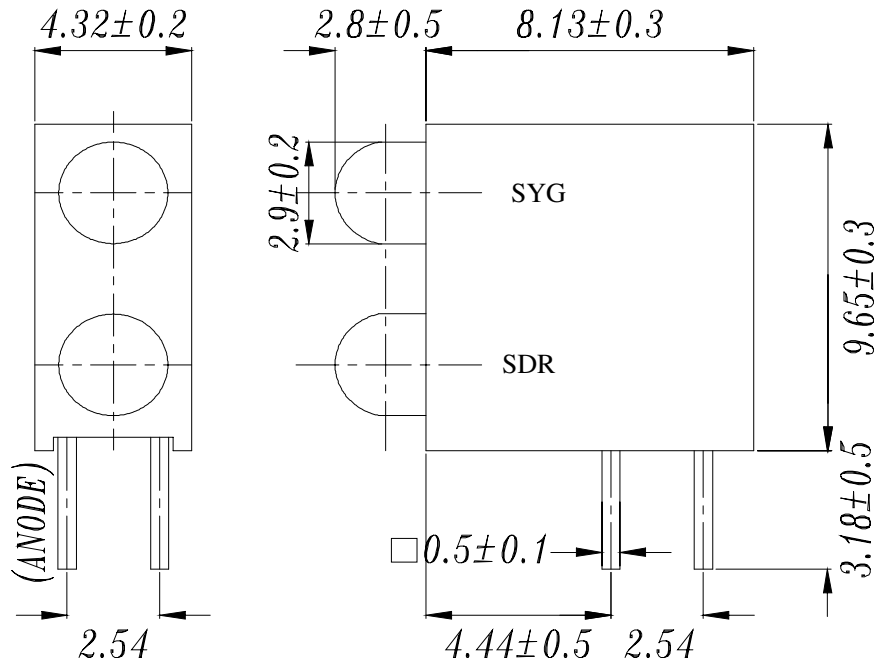

- Notes: 1.All dimensions are in millimeters, tolerance is 0.25mm except being specified  
2.Lead spacing is measured where the lead emerge from the package

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol		Rating	Unit
Forward Current	IF	264SYGD/S530-E2/F45-74	25	mA
		264SDRD/S530-A3/F45-75	25	
Operating Temperature	Topr		-40 to +85	°C
Storage Temperature	Tstg		-40 to +100	°C
Soldering Temperature	Tsol		260 ± 5	°C
Electrostatic Discharge	ESD	264SYGD/S530-E2/F45-74	2000	V
		264SDRD/S530-A3/F45-75	2000	
Power Dissipation	Pd	264SYGD/S530-E2/F45-74	60	mW
		264SDRD/S530-A3/F45-75	60	



Technical Data Sheet  
3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

Electro-Optical Characteristics (Ta=25°C)







Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	264SYGD/S530-E2/F45-74	VF IF= 20 mA	/	2.0	2.4	V
	264SDRD/S530-A3/F45-75		/	2.0	2.4	
Reverse Current	264SYGD/S530-E2/F45-74	IR VR= 5 V	/	/	10	μA
	264SDRD/S530-A3/F45-75		/	/	10	
Luminous Intensity	264SYGD/S530-E2/F45-74	Iv IF= 20 mA	16	32	/	mcd
	264SDRD/S530-A3/F45-75		50	80	/	
Viewing Angle	264SYGD/S530-E2/F45-74	2θ 1/2 IF= 20 mA	/	50	/	deg
	264SDRD/S530-A3/F45-75		/	50	/	
Peak Wavelength	264SYGD/S530-E2/F45-74	λp IF= 20 mA	/	575	/	nm
	264SDRD/S530-A3/F45-75		/	650	/	
Dominant Wavelength	264SYGD/S530-E2/F45-74	λd IF= 20 mA	/	573	/	nm
	264SDRD/S530-A3/F45-75		/	639	/	
Spectrum Radiation Bandwidth	264SYGD/S530-E2/F45-74	Δλ IF= 20 mA	/	20	/	nm
	264SDRD/S530-A3/F45-75		/	20	/	

Technical Data Sheet  
3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

Typical Electro-Optical Characteristic Curves:

(SYG)

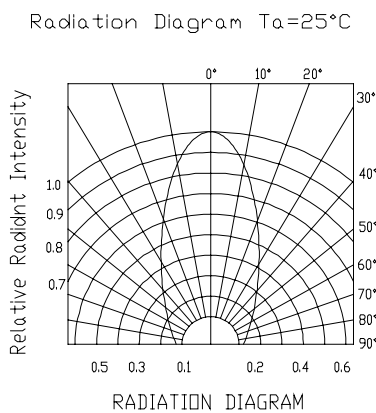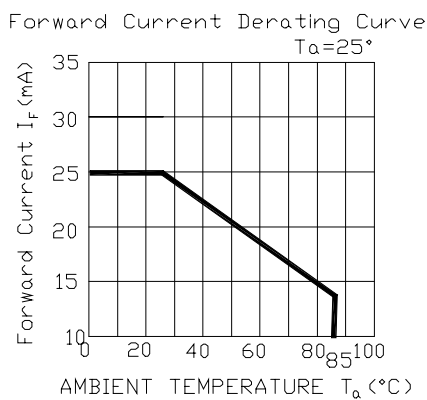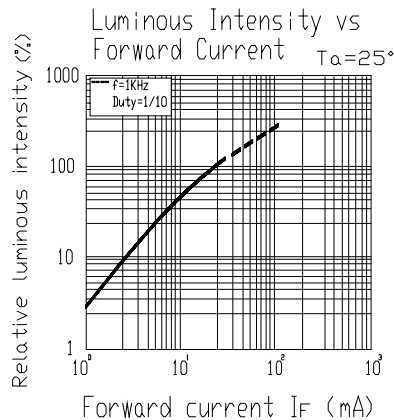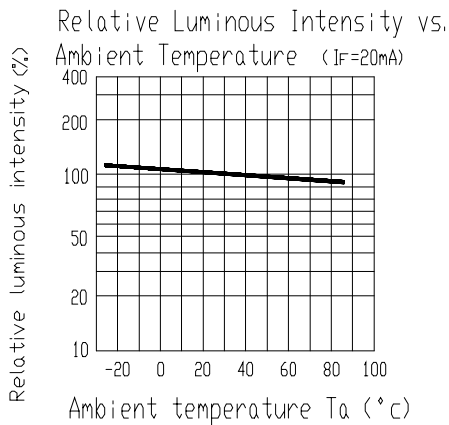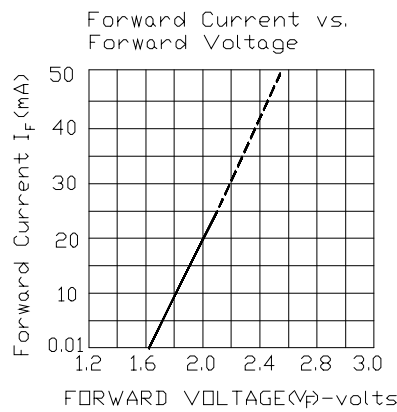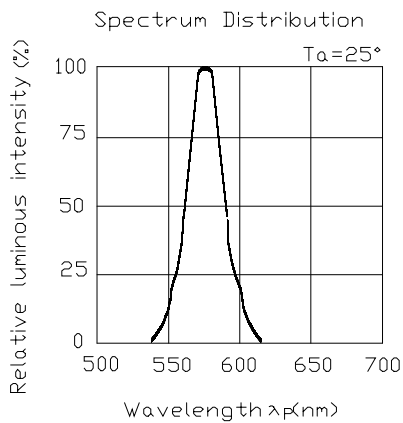









Technical Data Sheet

3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

Typical Electro-Optical Characteristic Curves:

( SDR )

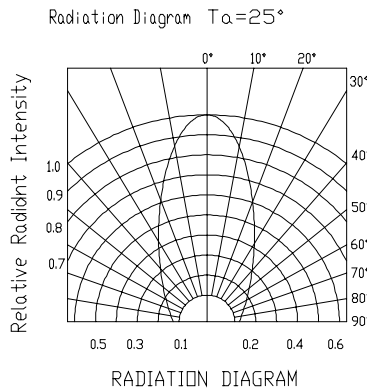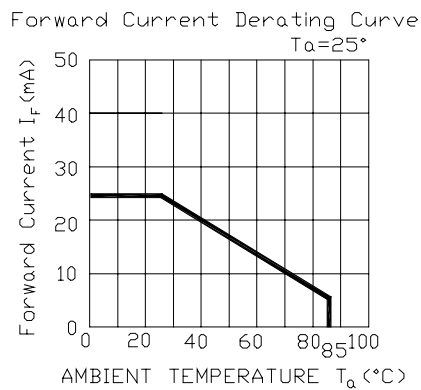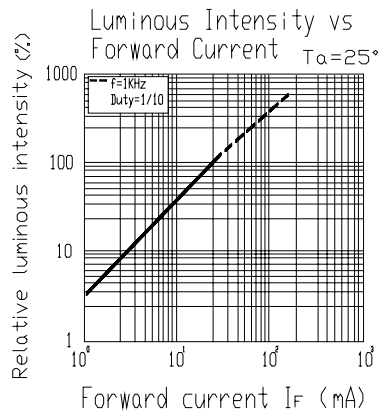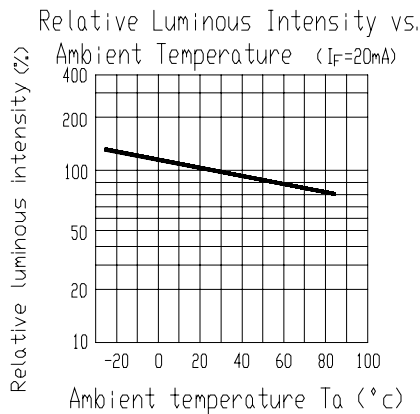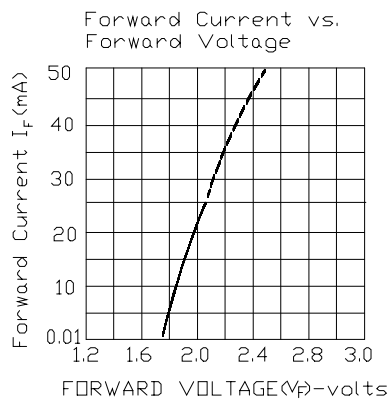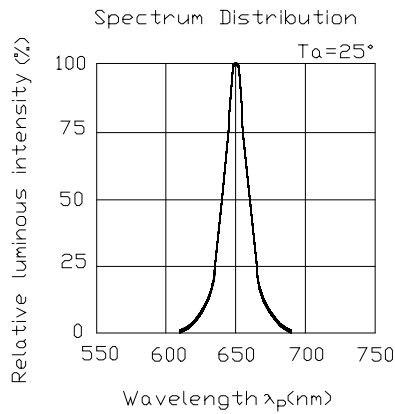



## Technical Data Sheet

## 3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

■ Reliability test items and conditions:

The reliability of products shall be satisfied with items listed below.

Confidence level : 97%

LTPD : 3%

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Failure Judgment Criteria	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	10 SEC	76 PCS	$I_v \leq I_{vt} * 0.5$ or $V_f \geq U$ or $V_f \leq L$	0/1
2	Temperature Cycle	H : +100°C 15min $\int$ 5 min L : -40°C 15min	300 CYCLES	76 PCS		0/1
3	Thermal Shock	H : +100°C 5min $\int$ 10 sec L : -10°C 5min	300 CYCLES	76 PCS		0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS		0/1
5	Low Temperature Storage	TEMP : -40°C	1000 HRS	76 PCS		0/1
6	DC Operating Life	TEMP : 25°C IF = 20mA	1000 HRS	76 PCS		0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 HRS	76 PCS		0/1

Note :  $I_{vt}$  : To test  $I_v$  value of the chip before the reliability test

$I_v$  : The test value of the chip that has completed the reliability test

U : Upper Specification Limit

L : Lower Specification Limit



Technical Data Sheet  
3.0mm Cylindrical Type LED lamps

A2794B/SYGSDR/S530-A3

Packing Quantity Specification

- 1. 500PCS/1Plate · 4Plate/1Box
- 2. 10Boxes/1Carton

Label Form Specification



CPN: Customer's Production Number  
P/N : Production Number  
QTY: Packing Quantity  
CAT: Ranks  
HUE: Dominant Wavelength  
REF: Reference  
LOT No: Lot Number

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

<i>EVERLIGHT ELECTRONICS CO., LTD.</i>	<i>Tel: 886-2-2267-2000, 2267-9936</i>
<i>Office: No 25, Lane 76, Sec 3, Chung Yang Rd,</i>	<i>Fax: 886-2267-6244, 2267-6189, 2267-6306</i>
<i>Tucheng, Taipei 236, Taiwan, R.O.C</i>	<i>http://www.everlight.com</i>