



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com





Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:
 0 ± 0.50 ANGLE 3°
 0.0 ± 0.38
 0.00 ± 0.25
 0.000 ± 0.10

THIS IS A C.A.D. GENERATED DRAWING
 DO NOT MAKE MANUAL REVISIONS TO MASTER.



ISSUE NUMBER
 ORIGINAL



NOTES:
 1. MATERIALS:
 HOUSING: HIGH TEMPERATURE NYLON, UL94 V-0, COLOR: BLACK
 CONTACTS: 0.35MM PHOSPHOR BRONZE PLATED WITH GOLD PLATING AND TIN IN SOLDER AREA

PART NO	GOLD PLATING THICKNESS
A64-112-231N411	GOLD FLASH PLATING
A64-113-231N411	15 MICRO INCHES OF GOLD
A64-114-231N411	30 MICRO INCHES OF GOLD

- SHIELD: 0.20MM COPPER ALLOY WITH NICKEL PLATING
 2. OPERATING TEMPERATURE: 0°C TO +70°C
 3. MATE WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.
 4. DIMENSION: MM [INCHES]

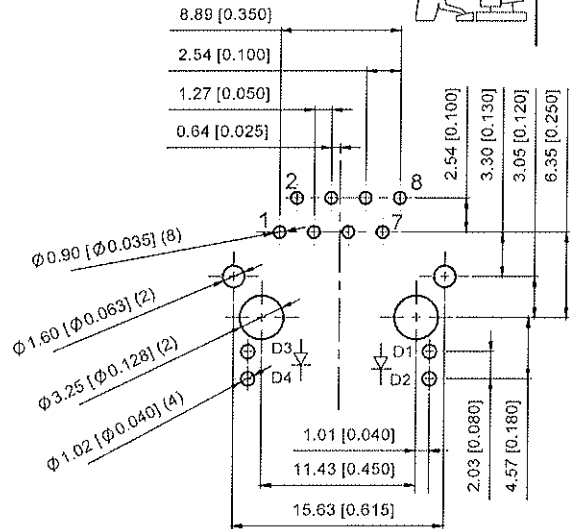

RECOMMENDED P.C.B. LAYOUT
 TOLERANCE: ±0.05[±0.002]

RJ45 MAGNETIC JACK WITH LED, 8P, 8C
 SHIELDED/10/100 Mbps FILTER

ACAD REFERENCE NO.: A64-112-231N411

DRAWN R. STA. MONICA DATE: JAN. 24/2011

CHECKED: DATE:

PART NUMBER

SEE NOTE

SHEET 1 OF 2

DRAWING NUMBER

A64-112-231N411

ISSUE

1



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCE.



EDAC INC
 TORONTO, ONTARIO
 CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED, OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ELECTRICAL CIRCUIT:

TOLERANCE UNLESS OTHERWISE SPECIFIED IN MM:
 0 ± 0.50 ANGLE 3°
 0.0 ± 0.25
 0.00 ± 0.25
 0.000 ± 0.10

THIS IS A C.A.D. GENERATED DRAWING
 DO NOT MAKE MANUAL REVISIONS TO MASTER.




ISSUE NUMBER
 ORIGINAL ①

TEST NOTES:(25±5°C)

- 1.TR:(100KHz,0.1V);
 PINS:(P1-P2):(J1-J2)=1:1±3%
 PINS:(P7-P8):(J3-J6)=1:1±3%
- 2.LX:(100KHz,100mV,8mA, DC Bias)
 PINS:(P1,P2),(P7,P8)=350uH MINIMUM
- 3.DCR:
 PINS:(P1-P2),(J1-J2),(J3-J6)= 1.0 OHMS MAXIMUM
 PINS:(P7-P8)= 1.2 OHMS MAXIMUM
- 4.HIPOT:
 PINS(P7,P6,P8)TO(J3,J6)=1500VAC FOR 2 SECONDS
 PINS(P1,P3,P2)TO(J1,J2)=1500VAC FOR 2 SECONDS
- 5.INSERTION LOSS:
 -1.0dB MAXIMUM AT 1MHz TO 100MHz;
- 6.RETURN LOSS:
 -20dB MINIMUM AT 1MHz TO 30MHz;
 -15dB MINIMUM AT 30MHz TO 60MHz
 -10dB MINIMUM AT 60MHz TO 80MHz
- 7.CROSS TALK:
 -30dB MINIMUM AT 1MHz TO 100MHz
- 8.COMMON TO COMMON MODE REJECTION:
 -30dB MINIMUM AT 1MHz TO 100MHz


CONNECTOR SOLDER SIDE

RJ45 CONTACT SIDE

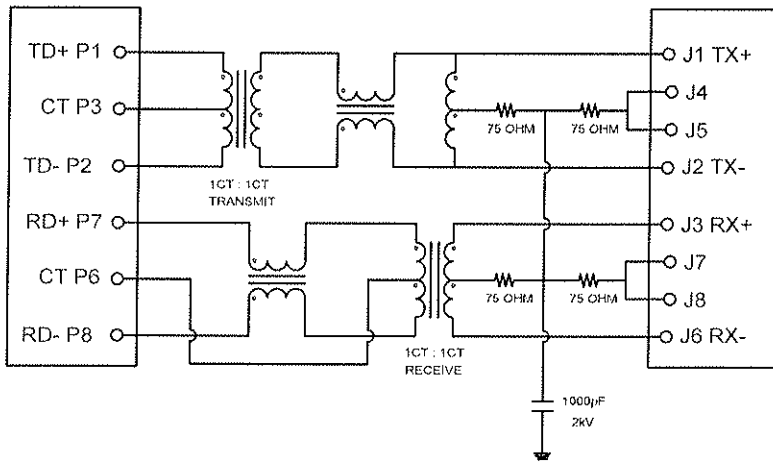

Color	Lens Color	Vf(v) @20mA		Iv(mcd) @10mA		Viewing angle 2θ 1/2
		Min	Max	Min	Typ	
Yellow	Yellow Diffused	1.7	2.8	3.0	6.0	116
Green	Green Diffused	1.7	2.8	3.5	6.0	116

LED CIRCUIT:



RJ45 MAGNETIC JACK WITH LED, 8P, 8C
 SHIELDED/10/100 Mbps FILTER



THIS SERIES FULLY CONFORMS TO THE EUROPEAN UNION DIRECTIVES 2002/95/EC AND 2002/96/EC FOR RoHS COMPLIANCY.



EDAC INC
 TORONTO, ONTARIO
 CANADA

YOUR CONNECTION TO QUALITY & SERVICE

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF EDAC INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

ACAD REFERENCE NO.: A64-112-231N411

DRAWN/R.STA.MONICA DATE: JAN.24/2011

CHECKED: DATE:

PART NUMBER

SEE NOTE

DRAWING NUMBER
 A64-112-231N411

ISSUE
 1