



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Model: AAS-AQS-UNO

Air Quality Evaluation Board

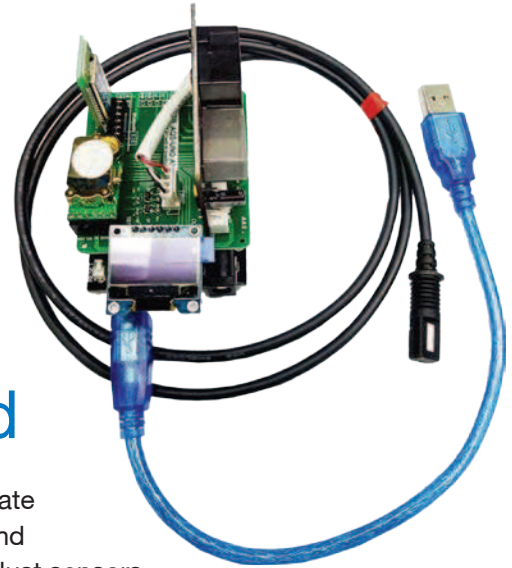

The AAS-AQS-UNO engineering evaluation board is used to evaluate the Telaire air quality sensors. It can support T9602 temperature and humidity sensors, T6713 carbon dioxide sensors, SM-PWM-01C dust sensors and other sensors from the Amphenol range. Moreover, the OLED display and Bluetooth output can be supported at the same time. This evaluation board is designed to speed up evaluation and development of the relevant sensors. The serial output can be configured to send sensor data to a PC over the USB connection for recording and analysis in 3rd party software.

Applications

- Rapid development of air quality sensor acquisition system (temperature and humidity, carbon dioxide and dust, etc.)
- Rapid development of intelligent apparel devices and low-power-consumption IOT-based Bluetooth modules



Features

- Arduino development platform, open source code
- Reserved SM-PWM-01C dust sensor interface
- Reserved T6713 carbon dioxide sensor interface
- Reserved T9602 temperature and humidity sensor interfaces
- Reserved laser dust sensor interface
- Support Bluetooth BLE4.0 OSPF module
- Support the 128 * 64 OLED screen
- External USB power supply
- Sample code available on www.Github.com

Amphenol

Advanced Sensors

Telaire AAS-AQS-UNO

| Main Technical Indexes of AAS-AQS-UNO Evaluation Board | | |
|--|--|------|
| Parameter | Rated value | Unit |
| DC power supply voltage | 5V DC | V |
| DC power supply current | 1A | A |
| Operating temperature range | 0°~60° | ° |
| Operating humidity range | 0~95% | %RH |
| Output level | L<0.8@3.3V, H>2.7@3.3V | |
| Dimension | 72mm*56mm | mm |
| Support interface | I ² C output T9602 temperature and humidity sensor UART output T6713 carbon dioxide sensor UART output laser dust sensor PWM output infrared dust sensor | |

AAS-AQS-UNO Evaluation Kit Includes:

- 1 Arduino compatible board with preloaded software
- 1 sensor evaluation shield
- 1 USB data line
- 1 OLED screen
- 1 SM-PWM-01C Dust Sensor

AAS-AQS-UNO-RH-CO₂ Kit Includes:

- All Items in AAS-AQS-UNO detailed above plus:
 - 1 T9602-3-D-1 Humidity & Temp Sensor
 - 1 T6713-6H CO₂ Sensor Module

Amphenol
Advanced Sensors

www.telaire.com

www.amphenol-sensors.com

© 2017 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.
Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-683C - 01/2017