



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




29.0 x 25.5 x 2.8 mm SMT Bluetooth Module

ABBTM-2.4GHz-33-T

Compliant to MSL level 3



RoHS
Compliant



29.0 x 25.5 x 2.8 mm SMT

FEATURES:

- Bluetooth Spec v1.2 Compliant
- Class 2, up to 10-meter range
- Complete 2.4GHz Bluetooth® System
- Power management: low power 1.8V operation for Bluetooth® core
- Compact size: 29.0mm (L) x 25.5 (W) mm x 2.8 (H) mm
- Bluetooth® Profile Supported: HSP, HFP, A2DP, AVRCP
- Built-in stereo codec
- Internal antenna
- Built-in audio amplifier
- Built-in power manager
- On-board flash memory (8Mbits)
- Echo cancellation software library
- Several firmware options
- Rewritable flash memory for easy upgrade route

APPLICATIONS:

- Automotive car kit applications
- PDAs and other portable terminals
- Car radio/Car DVD

GENERAL DESCRIPTION

Abracon's ABBTM-2.4GHz-33-T module is a complete Bluetooth® solution built on CSR BC03 MultiMedia External Core, supported by 8Mbit on-board Flash Memory. ABBTM-2.4GHz-33-T is a short range, compact, cost effective solution designed to facilitate Bluetooth® connectivity for applications including Car & Home Audio and other Handsfree solutions.

ABBTM-2.4GHz-33-T module is a Power Class-2 Bluetooth® device, compliant with version 1.2 specification. The overall architecture comprises of built-in antenna and supporting circuitry for software protocols including L2CAP, SDP, GAP, HSP, HFP, A2DP and AVRCP, resident in the on-board Flash Memory.

ELECTRICAL SPECIFICATIONS:

Operating Frequency Band	2.4GHz ~ 2.48GHz Unlicensed ISM Band
Bluetooth Specification	V1.2
Output Power Class	Class 2
Operating Voltage	+3.3V and +5.0V
Host Interface	UART
Flash Memory Size	8 Mb

Absolute Maximum Ratings

	Minimum	Maximum
Storage temperature	-40°C	+150°C
Supply voltage: VBAT	-0.30V	3.6V

Recommended Operating Conditions


	Minimum	Maximum
Operating temperature range	-40°C	+85°C
Supply voltage: Vcc	+3.0V	+3.6V
Supply voltage: Vdd	+1.7V	+1.9V

29.0 x 25.5 x 2.8 mm SMT Bluetooth Module

ABBTM-2.4GHz-33-T



RoHS
Compliant



29.0 x 25.5 x 2.8 mm SMT


Firmware Configuration

- a) UART Baud: 115200 , N, 8, 1
- b) BlueTooth Name: BlueAudio
- c) Pin Code: 0000

Software Description

1. After Power on 3V3, the module is connectable and Pairing
2. ABBTM-2.4GHz-33-T can be found with the name “BlueAudio” via any Bluetooth device
3. Input the Pincode “0000”, you can pair with the module named “BlueAudio”
4. Then the BlueAudio can be connected
5. Data can be transferred between the BlueAudio and any other Bluetooth device

APPLICATION SCHEMATIC

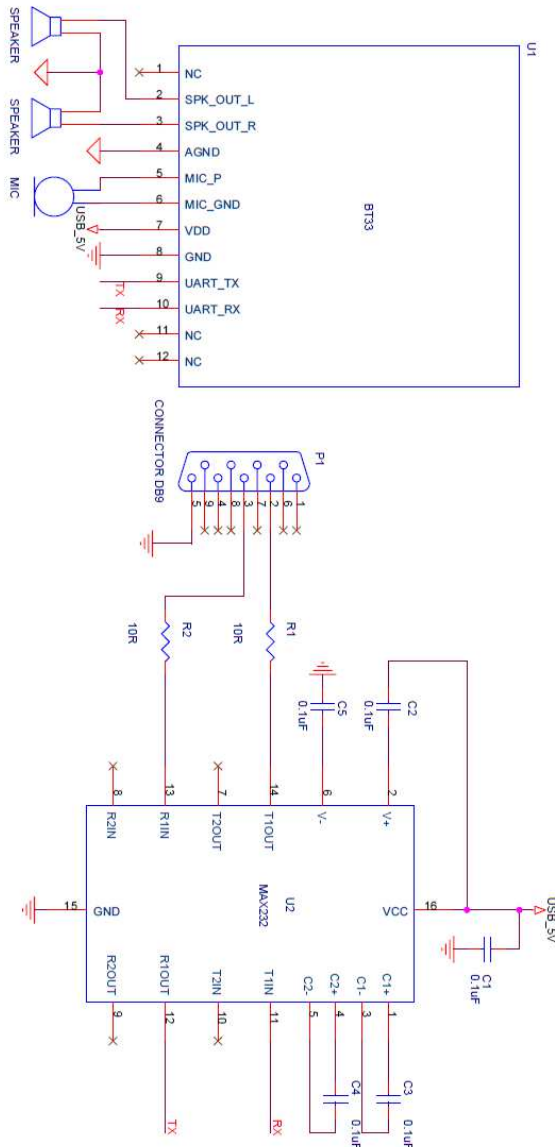


29.0 x 25.5 x 2.8 mm SMT Bluetooth Module

ABBTM-2.4GHz-33-T





RoHS
Compliant




29.0 x 25.5 x 2.8 mm SMT

MECHANICAL DIMENSIONS

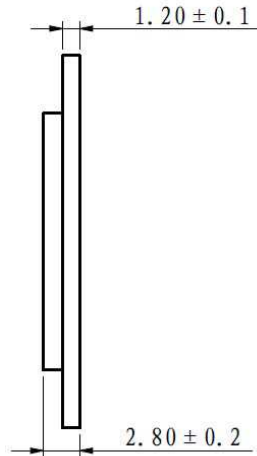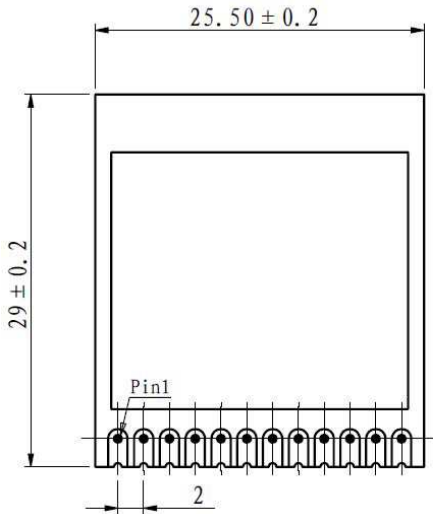

Recommended Land Pattern

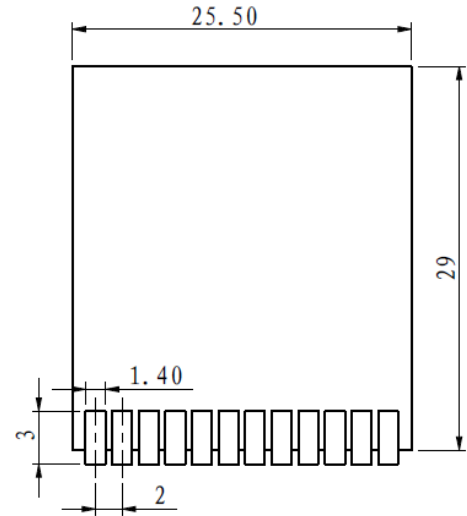

Note: Specified dimensions without tolerance are listed for reference purposes only. Dimensions: mm.

PIN DESCRIPTION


Pin No.	Name	Type	Function
1	NC	Input / Output	Not used currently
2	SPK_OUT_L	Output	Left channel audio out
3	SPK_OUT_R	Output	Right channel audio out
4	AGND	Ground	Analog ground
5	MIC_P	Input	Microphone positive pole input, internal power supply
6	MIC_GND	Ground	Microphone ground
7	VDD	Input	Power supply, +3.3V ~ +5V
8	GND	Ground	Power ground
9	UART_TX	Output	UART data output
10	UART)RX	Input	UART data input
11	NC	Input / Output	Not used currently
12	NC	Input / Output	Not used currently

29.0 x 25.5 x 2.8 mm SMT Bluetooth Module

ABBTM-2.4GHz-33-T




RoHS
Compliant



29.0 x 25.5 x 2.8 mm SMT


REFLOW PROFILE

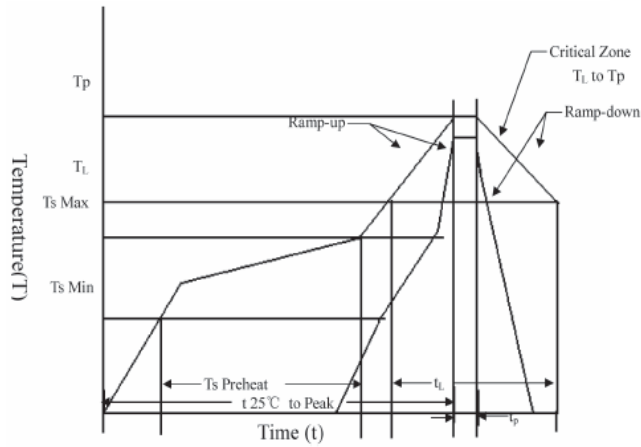


T_s max to T_l (Ramp-up Rate)	3°C/second max.
Preheat	
Temperature Min. (T_s Min.)	150°C
Temperature Typical (T_s Typ.)	175°C
Temperature Max. (T_s Max.)	200°C
Time (t_s)	60 ~ 180 seconds
Ramp-up rate (T_l to T_p)	3°C/second max.
Time Maintained Above: --Temperature (T_l)/Time (T_l)	217°C/60 ~ 150 seconds
Peak Temperature (T_p)	250°C max. for 10 seconds
Target Peak Temperature (T_p Target)	250°C +0/-5°C
Time within 5°C of actual peak (t_p)	20 ~ 40 seconds
Ramp-down Rate	6°C/second max.
Tune 25°C to Peak Temperature (t)	8 minutes max.

PACKAGING:

300pcs/reel

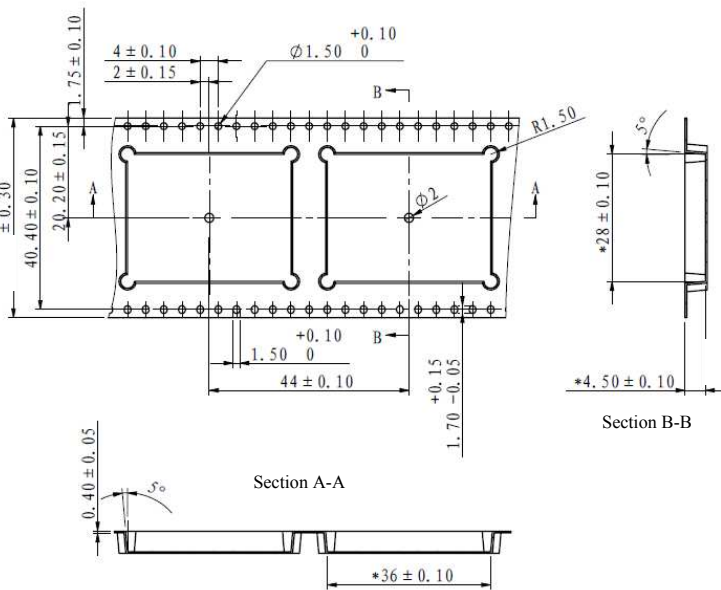

包装要求:
500 pcs/Reel

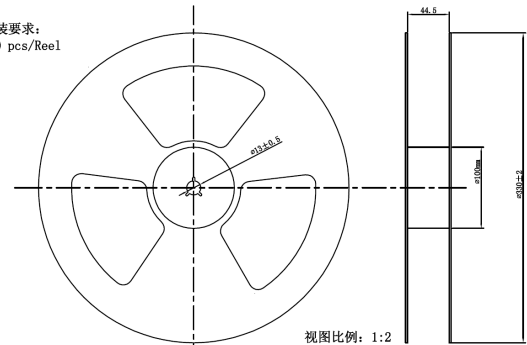

- Unless otherwise specified, the tolerance is ± 0.1 mm
- The carrier tape material thickness is 0.4mm
- Unless otherwise specified, the round corner is R0.3; the peeling angle is no greater than 5°
- The finished products has no rough edges and no damage; cover tape should be sealed
- Material is ROHS compliant

Packaging:

ABBTM-2.4GHz-33-T devices will be packaged per MSL level-3 requirements; Labeled as MSL 3, Tape- Packed + Vacuum-Packed with Antistatic bag, Desiccant, Humidity Indicator Card (HIC). Ref: IPC/JEDEC J-STD-033B.1

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 01.14.15