



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Airborne Industrial Wireless Ethernet Bridge Ethernet to 802.11b/g Wireless LAN

ABDG-ET-IN5010 Industrial Bridge



Airborne™ is a line of highly integrated 802.11 radios and device servers, designed to address the demands of complex machine-to-machine (M2M) applications. Utilizing the latest 802.11 microprocessor and network technologies, the Airborne family of products provide a broad encompassing solution for wireless applications requiring performance, reliability and advanced security.

The Airborne Industrial Ethernet Bridge allows an Ethernet enabled device to connect to a high performance wireless 802.11 network. The integrated Network Address Translation (NAT) functionality provides plug and play connectivity and simple integration to any system with an Ethernet port. The Ethernet interface supports auto rate detection up to 100Mb/s. The ABDG-ET-IN5010 includes a full featured 802.11b/g radio and a high performance ARM9 MCU running embedded Linux.

Enterprise Class Security

WPA2-Enterprise is the leading wireless security standard for enterprise networks and is fully supported by the Airborne Industrial products.

The integrated supplicant supports a wide range of EAP processes including:

- EAP-TLS/MSCHAPv2
- EAP-TLS/MD5
- EAP-TTLS/MSCHAPv2
- PEAPv0/MSCHAPv2
- LEAP

Airborne supports the most flexible certificate delivery and management available in the wireless device market, along with WEP, WPA, WPA2, 802.11i and Pre-shared Key (PSK), no other wireless solution provides a more comprehensive security solution.

Reliability

Designed specifically to meet the demands of the industrial, automotive and medical markets, the Airborne Ethernet Bridge has the widest operating temperature range. The industrial series includes a variable power supply input (5-36 VDC) with convenient terminal block and are packaged in a ruggedized metal enclosure to withstand harsh conditions and environments. Quatech also provides FCC Modular certification, minimizing requirements for further regulatory testing by original equipment manufacturers.

Applications

Previous generations of Airborne Wireless Ethernet Bridge have been integrated and deployed into a wide range of applications across various industries.

- Industrial Automation
- Vehicle telematics & diagnostics
- Material handling & logistics
- Medical Equipment
- Test & measurement
- Security & access control

Model Selection Guide

Model No.	Interface		WiFi	Security				
	10 Base-T	10/100 Ethernet	802.11b/g	WEP (64 & 128 bit)	WPA	WPA2	LEAP	EAP
ABDG-ET-IN5010		■	■	■	■	■	■	■


KEY FEATURES

- Extended operating temperatures (-40° to +85°C) and environmental specifications
- Plug-n-Play Ethernet to 802.11 Connectivity
- Enterprise Class wireless security (WPA2-Enterprise, WPA2-PSK, WPA-PSK, WEP, EAP) with Certificates
- Plug-and-Play LAN and Internet Connectivity
- Rugged Metal Enclosure
- Integrated External Antenna
- Software-configurable 802.11b/g Interface
- Advanced utilities for discovery, configuration and management of Airborne Ethernet device
- Variable DC Power Supply (5-36 VDC) with screw terminal connectors
- Worldwide Certificate Support- FCC Part 15 Class B Sub C Modular Approval, IOC, CE, ETSI, ROHS, WEEE
- 5 year warranty

Quatech's Airborne Enterprise Wireless Ethernet Bridge extends the reputation of the family further by drawing on experience of Quatech application engineers across hundreds of wireless M2M deployments.

The advanced technologies implemented in the Quatech Enterprise 802.11 Ethernet Bridge provide an industry-leading solution with breakthrough performance and security for M2M applications and drop in replacements for existing 802.11b and 802.11b/g networking modules.

Block Diagram

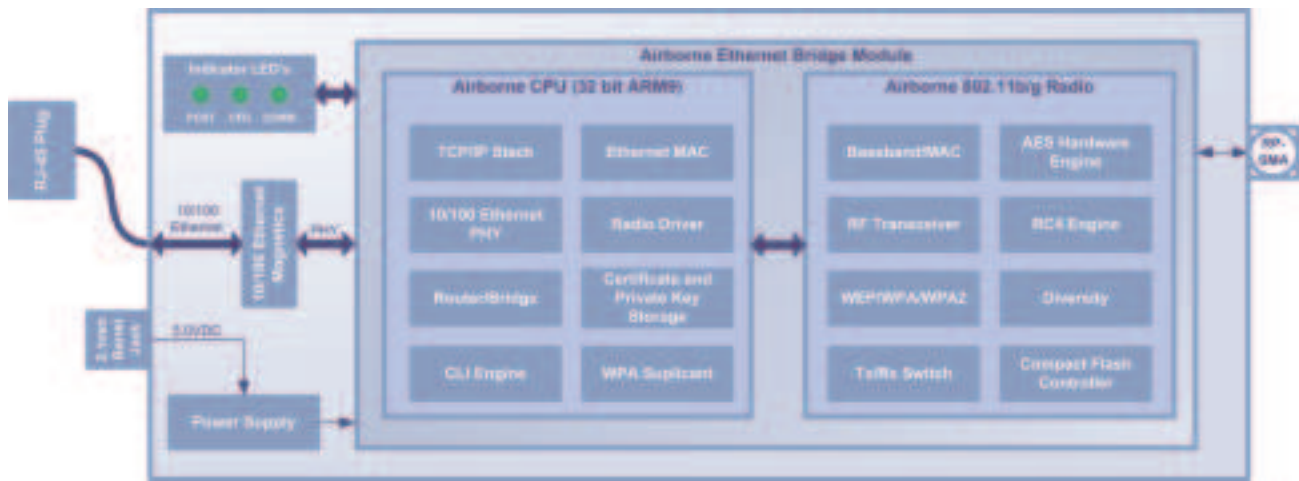

Package Contents

Model No.	Package Includes:
ABDG-ET-IN5010	Airborne Industrial Ethernet Bridge Omni-directional Wand Antenna Installation/Documentation CD

Specifications

Technology	IEEE 802.11b/g, WiFi compliant
Wired Interface	10/100 Ethernet (auto sense), RJ-45 Plug
Frequency	2.4 ~ 2.4835 GHz (US/Canada/Europe) 2.4 ~ 2.497 GHz (Japan)
Modulation Technology	DSSS, CCK, OFDM
Modulation Type	DBPSK, DQPSK, CCK, BPSK, QPSK, 16QAM, 64QAM
Network Access Modes	Infrastructure, Ad Hoc
Channels	USA/Canada: 11 channels Europe: 13 channels France: 4 channels Japan: 14 channels (13 channels for 802.11g)
Wireless Data Rate	802.11b = 11, 5.5, 2, 1 Mbps 802.11g = 54, 48, 36, 24, 18, 12, 9, 6 Mbps
MAC	CSMA/CA with ACK, RTS, CTS
Network Protocols	TCP/IP, ARP, ICMP, DHCP, DNS, UDAP, TFTP, UDP, PING
Receive Sensitivity	54Mb/s = -69dBm 6 Mb/s = -86dBm 1Mb/s = -86dBm
Security Protocols	Disabled, WEP 64 & 128bit, WPA (TKIP), WPA (AES), WPA2 (AES), 802.1x (EAP) Supplicant Supports WPA & WPA2 Enterprise supplicants EAP-TLS/MSCHAPV2, EAP-TTLS/MSCHAPv2, EAP-TTLS(MD5), EAP-PEAPv0/MSCHAPv2, LEAP Zero host security footprint Supports Certificate, delivery and management
Antenna	Integrated RP-SMA Omni-directional 3dBi Antenna
Supply	5-36 VDC +/-5%, 500mA
Supply In-rush Current	3000mA (MAX) for 20ms
Power Consumption	2.5W @5VDC
Power Connector	2-Position Terminal Block, 2.1mm Barrel Jack
DC Characteristics	Operating Current (Tx, 802.11g) = 500mA Typ. Operating Current (Rx, 802.11g) = 530mA Typ. Power Save (Snooze) = 10mA Typ. Power Down (Sleep) = 1mA Typ.
Environmental	Operating Temperature: -40°C - +85°C, Storage: -55°C - +150°C Relative humidity: 5% - 95% (non-condensing) Vibration: 20G peak-to-peak, 20Hz-2KHz swept Shock: 1500G peak-to-peak, 0.5ms duration
Enclosure	Ruggedized Metal (Black)
LED Indicators	4 Indicator LED (POWER, POST, LINK, COMM)
Agency Approvals	Worldwide Certificate Support- FCC Part 15 Class B Sub C Modular Approval, IOC, CE, ETSI EN300 328, ETSI 60950-1, ROHS and WEEE Compliant

Mechanical Outline