



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

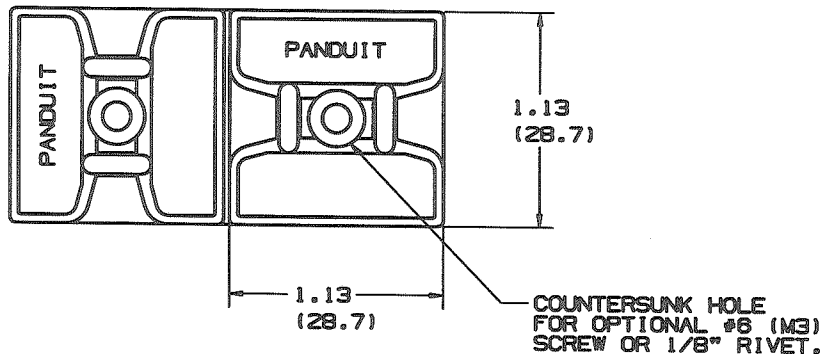

NO WARRANTY, EXPRESSED OR IMPLIED, IS MADE BY PANDUIT WITH RESPECT TO ADHESIVE BOND PERFORMANCE, AMONG OTHER THINGS, THE CONDITIONS UNDER WHICH THESE MOUNTS MAY BE APPLIED AND/OR THE SURFACE TO WHICH THEY MAY BE APPLIED ARE BEYOND PANDUIT'S CONTROL.

PANDUIT PART NUMBER*	WEIGHT lbs/100 pcs (g)/100 pcs	USE WITH THESE CABLE TIE CROSS-SECTIONS
ABMS-A	0.42 (189)	M, I, S

TO APPLY ADHESIVE MOUNT:  
 1) REMOVE PROTECTIVE LINER.  
 2) PLACE IN DESIRED LOCATION.  
 3) APPLY PRESSURE TO TOP SURFACE OF MOUNT.

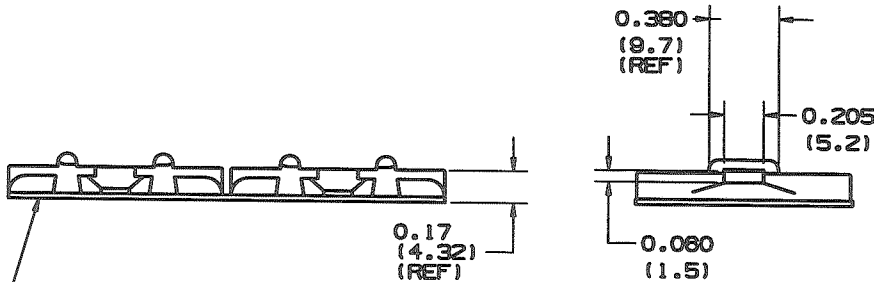

NOTES:

- \*1) SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATIONS FOR PACKAGE SIZE.
- 2) MOUNTS PROVIDED IN STRIPS OF TWO FOR EASY REMOVAL OF PROTECTIVE LINER.
- 3) MOUNTS WILL BE ORIENTED IN LINE WITH, OR 90° FROM EACH OTHER AS ILLUSTRATED ABOVE.

ADHESIVE BACKING:  
 PRESSURE SENSITIVE FOAM TAPE  
 0.04 (1.0) THICK WITH PROTECTIVE  
 LINER. MOUNT IS DESIGNED TO  
 SUPPORT 0.6 lb. (272g.) MAX. WEIGHT  
 ON A CLEAN, DRY, SMOOTH, GREASE-FREE  
 SURFACE.

DIMENSIONS IN BRACKETS ARE METRIC [ mm ]

CAD FILENAME/LAYERS

G00239GE\_DC\_ABMS\_01

**PANDUIT**

CORP. TINLEY PARK, ILLINOIS

ABMS-A  
 ADHESIVE BACKED MOUNT

UNLESS OTHERWISE SPECIFIED,  
 DIMENSIONAL TOLERANCES ARE:  
 (.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)  
 (.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,  
 ALL DIMENSIONS ARE GIVEN  
 IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY

CGSM

MAT'L:

SCALE

NONE

DATE

2-11-99

NYLON 6/6

DRAWING NO.

G00239GE

SIZE

A  
 012E

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
I	2/7/05	JAD	<i>ANN</i>	.205 WAS .200 CORRECTION: .17 WAS .250	G00239GE	I		
R	2-11-99	CGSM		INITIAL RELEASE	G00239GE	R		