



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



32.768 kHz SMD LOW PROFILE CRYSTAL

ABS09

ABS09



RoHS
Compliant



4.1 x 1.5 x 0.9 mm

ABS09 is not recommended for new designs. Please consider our reduced size ABS07 or ABS06.

FEATURES:

- Low frequency in small size SMD
- 0.9mm height ideal for high density circuit boards
- Ceramic package offers excellent environmental & heat resistance
- Extended temperature -40°C to +85°C for industrial applications

APPLICATIONS:


- Wide range in communication & measuring equipment
- Commercial & Industrial applications
- Wireless communications
- PDA and Palm Pilots

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N	ABS09
Nominal Frequency	32.768 kHz
Operating Temperature	-40°C to + 85°C
Turn-over Temperature	+25°C to ±5°C
Storage Temperature	-55°C to +125°C
Frequency Tolerance	±20 ppm max.
Temperature Coefficient (β)	- 0.034±0.006 ppm/T ²
Equivalent Series Resistance	70 kohms max.
Load Capacitance CL	12.5 pF (see option)
Drive Level	1.0 μ W max.
Aging (first year) 25°C	± 5 ppm max.
Insulation Resistance	500 M Ω with 100 Vdc ±15V
Shunt capacitance Co	1.0pF typ.
Motional capacitance C1	2.0fF typ.

TUNING FORK CRYSTAL TEMPERATURE CURVE

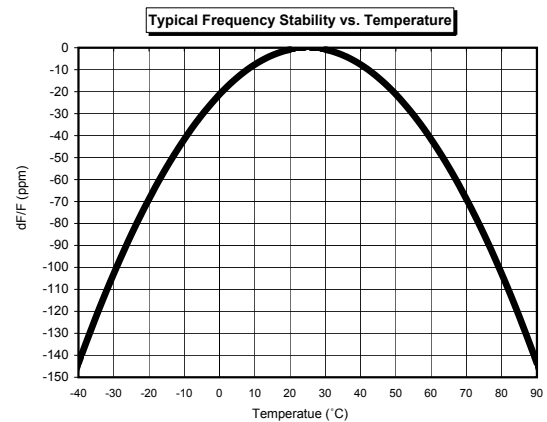

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ABS09-32.768kHz-□ - □ - □

Load Capacitance		Freq. Tolerance		Packaging	
Blank	12.5pF	1	± 10 ppm	Blank	Bulk
9	9pF	4	± 30 ppm	T	Tape and Reel
7	7pF				

*Contact ABRACON for non-standard load capacitance

ABRACON IS
ISO9001:2008
CERTIFIED




Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.20.10**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

32.768kHz SMD LOW PROFILE CRYSTAL


ABS09

ABS09




4.1 x 1.5 x 0.9 mm

OUTLINE DRAWING:

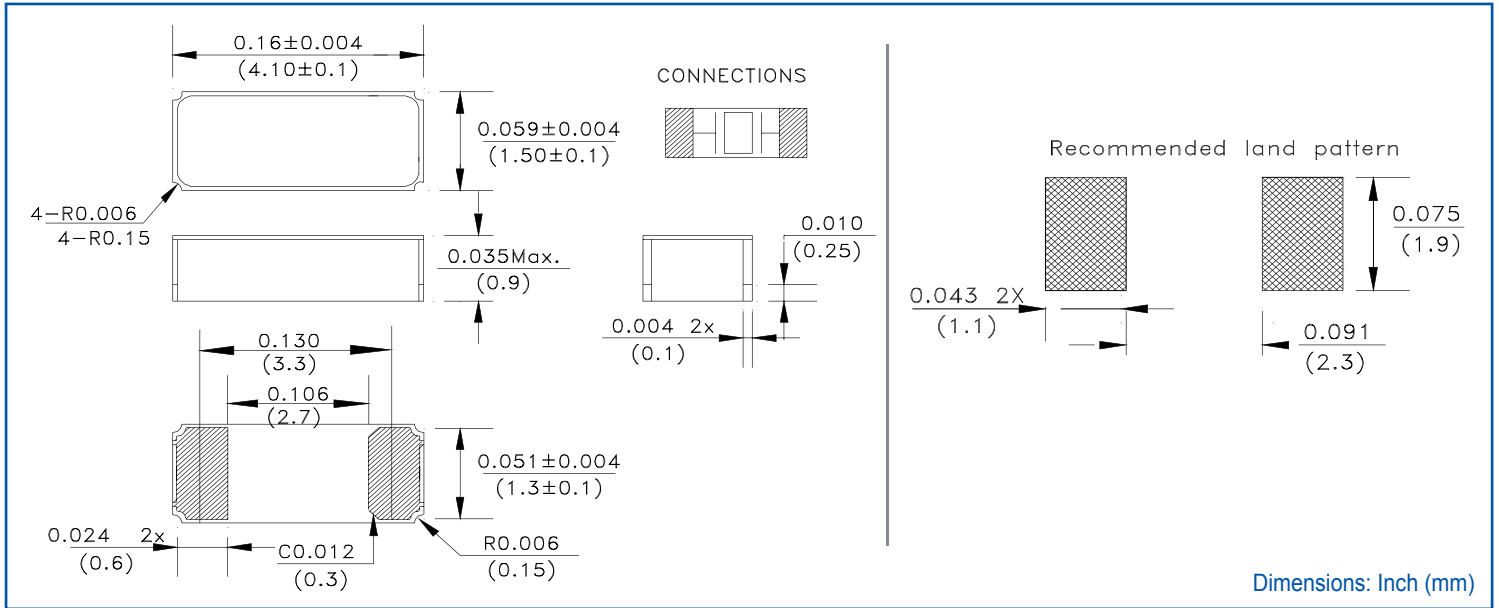

TAPE & REEL: T = Tape and reel 3,000pcs/reel

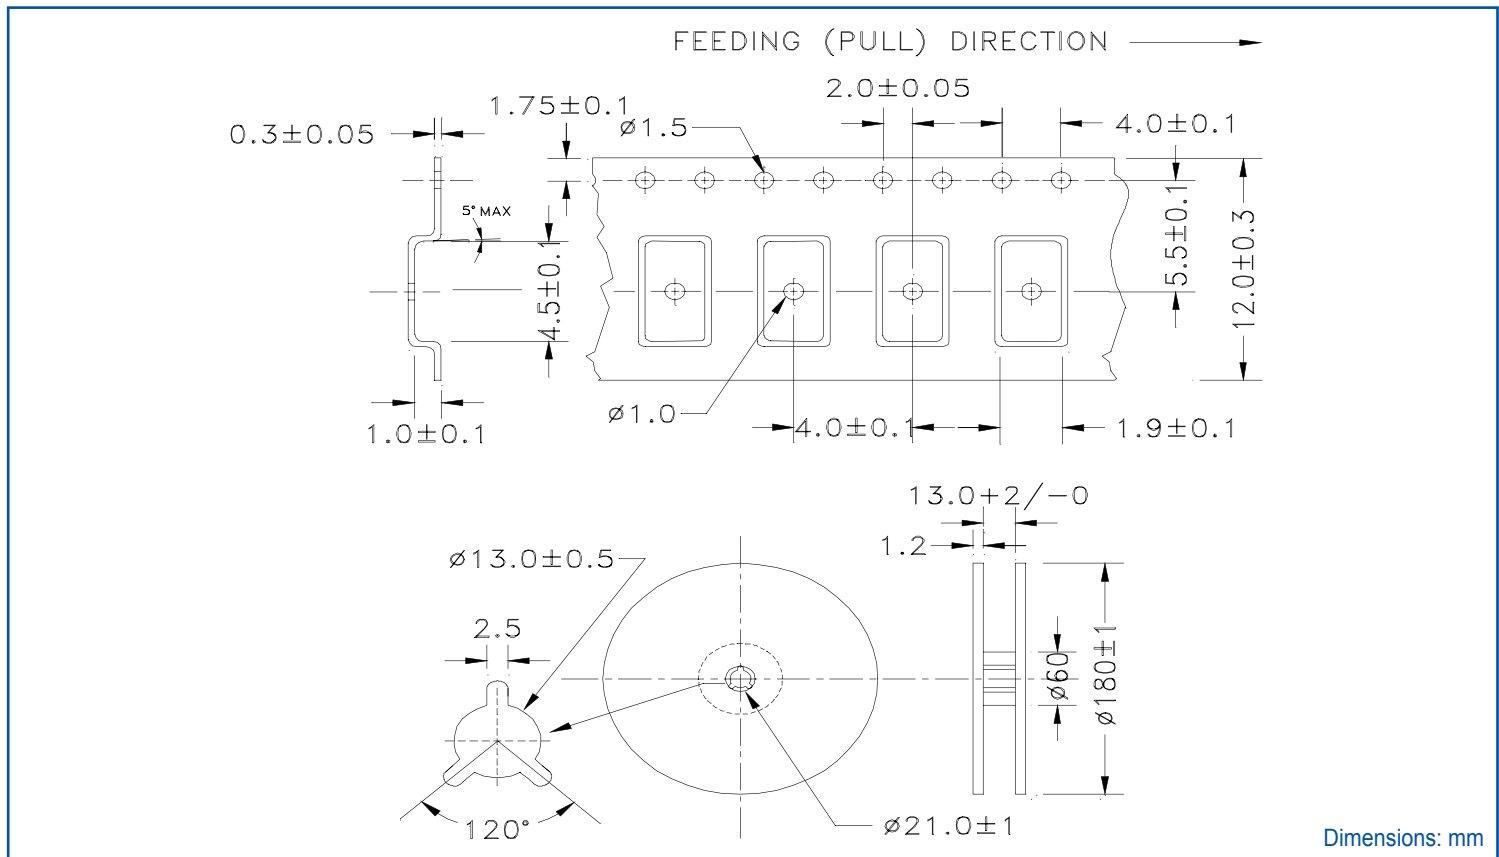

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.30.10**
30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com