



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Surface Mount Multiband Chip Antenna 490 / 783 / 868 & 915MHz



16.0 x 3.0 x 1.4mm

**ACA-105-T**



RoHS / RoHS II Compliant



Moisture Sensitivity Level (MSL) – MSL = 1

## FEATURES:

- Wide band ISM Chip Antenna covering 4 bands from 490MHz to 915MHz
- Matching via lumped elements with single footprint
- Constructed from solid dielectric ceramic material
- Suitable for RoHS compliant reflow
- Peak Gain -2.73 ~ 3.28dBi (dependant on band)
- Average Gain -6.27 ~ -1.10dBi (dependant on band)
- VSWR 3.0 : 1 max
- Size – 16.0 x 3.0 x 1.4mm (0.63 x 0.11 x 0.055 inch)
- Non Ground Mounting type
- Linear Polarization
- Matched to 50 Ohm.

## APPLICATIONS:

- 470 ~ 510MHz
  - Mobile ISM band radios
  - Chinese Automatic Meter Reading (AMR)
  - Smart Metering & Smart Grid
  - LMRS 470–490 MHz, and 490–512 MHz in urban areas
  - Ultra Low Power Applications.
- 779 ~ 787 MHz
  - IEEE 802.15.4c Wireless PAN use within China.
  - Short range devices
- 858 ~ 878MHz
  - IEEE 802.15.4 (868 - 868.6MHz) Europe
  - SDR European Standards by ETSI (863 ~ 870MHz).
- 902 ~ 928MHz
  - IEEE 802.15.4 (902 ~ 928MHz) Band 2 ISM US & Americas
  - FCC Part 15.247: 902-928 MHz

## STANDARD SPECIFICATIONS

### Maximum Ratings

Item	Value
ESD Voltage	15kV [HBM Class 3B]
Operating Temperature Range	-40°C to + 85°C
Storage Temperature Range	-40°C to + 85°C

### 3D Electrical Characteristics for 470 ~ 510MHz

ITEM		SPECIFICATION		
Frequency Range		490 ±20MHz		
VSWR		3: 1 Max		
Polarization		Linear		
Frequency [MHz]		470	490	510
Gain [dBi]	Peak	-3.52	-2.73	-4.02
	Average	-7.17	-6.27	-7.42
Efficiency [%]		19.08	23.47	18.00

### 2D Electrical Characteristics for 470 ~ 510MHz

2D MEASUREMENT				
Gain [dBi]	Azimuth	Theta	Peak	-5.46
			Average	-6.00
		Phi	Peak	-12.10
			Average	-14.54
	Elevation 1	Theta	Peak	-10.78
			Average	-14.82
		Phi	Peak	-4.42
			Average	-7.72
	Elevation 2	Theta	Peak	-10.34
			Average	-15.10
		Phi	Peak	-4.39
			Average	-8.90

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 10.06.14**  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

# Surface Mount Multiband Chip Antenna 490 / 783 / 868 & 915MHz



16.0 x 3.0 x 1.4mm

**ACA-105-T**



RoHS / RoHS II Compliant



## 3D Electrical Characteristics for 779 ~ 787MHz

ITEM		SPECIFICATION		
Frequency Range		783 ±4MHz		
VSWR		2: 1 Max		
Polarization		Linear		
Frequency [MHz]		779	783	787
Gain [dBi]	Peak	-2.86	3.01	2.65
	Average	-1.05	-0.95	-1.30
Efficiency [%]		78.72	80.37	74.25

## 2D Electrical Characteristics for 779 ~ 787MHz

2D MEASUREMENT				
Gain [dBi]	Azimuth	Theta	Peak	2.58
			Average	1.30
		Phi	Peak	-4.56
			Average	-9.04
	Elevation 1	Theta	Peak	-1.80
			Average	-6.80
		Phi	Peak	2.42
			Average	-2.68
	Elevation 2	Theta	Peak	-7.50
			Average	-11.69
		Phi	Peak	2.49
			Average	-2.84

## 3D Electrical Characteristics for 858 ~ 878MHz

ITEM		SPECIFICATION		
Frequency Range		868 ±10MHz		
VSWR		2: 1 Max		
Polarization		Linear		
Frequency [MHz]		858	868	878
Gain [dBi]	Peak	2.41	2.98	2.72
	Average	-1.15	-0.79	-1.23
Efficiency [%]		76.93	83.57	75.53

## 2D Electrical Characteristics for 858 ~ 878MHz

2D MEASUREMENT				
Gain [dBi]	Azimuth	Theta	Peak	2.24
			Average	1.34
		Phi	Peak	-12.18
			Average	-15.31
	Elevation 1	Theta	Peak	-7.73
			Average	-11.91
		Phi	Peak	3.37
			Average	-1.62
	Elevation 2	Theta	Peak	-12.41
			Average	-17.81
		Phi	Peak	3.08
			Average	-1.60



# Surface Mount Multiband Chip Antenna 490 / 783 / 868 & 915MHz



16.0 x 3.0 x 1.4mm

## ACA-105-T



RoHS / RoHS II Compliant



### 3D Electrical Characteristics for 902 ~ 928MHz

ITEM		SPECIFICATION		
Frequency Range		915 ±13MHz		
VSWR		2: 1 Max		
Polarization		Linear		
Frequency [MHz]		902	915	928
Gain [dBi]	Peak	3.25	3.28	2.46
	Average	-1.20	-1.10	-1.86
Efficiency [%]		76.03	77.80	65.22

### 2D Electrical Characteristics for 902 ~ 928MHz

2D MEASUREMENT				
Gain [dBi]	Azimuth	Theta	Peak	0.73
			Average	0.04
		Phi	Peak	-13.48
			Average	-15.83
	Elevation 1	Theta	Peak	-11.40
			Average	-15.59
		Phi	Peak	2.79
			Average	-2.13
	Elevation 2	Theta	Peak	-10.45
			Average	-15.53
		Phi	Peak	3.09
			Average	-1.89

### PART IDENTIFICATION:

ACA-105- 

#### Packaging

Blank: Bulk

T: Tape and Reel

# Surface Mount Multiband Chip Antenna 490 / 783 / 868 & 915MHz




16.0 x 3.0 x 1.4mm


**ACA-105-T**

RoHS / RoHS II Compliant

## OUTLINE DIMENSIONS:

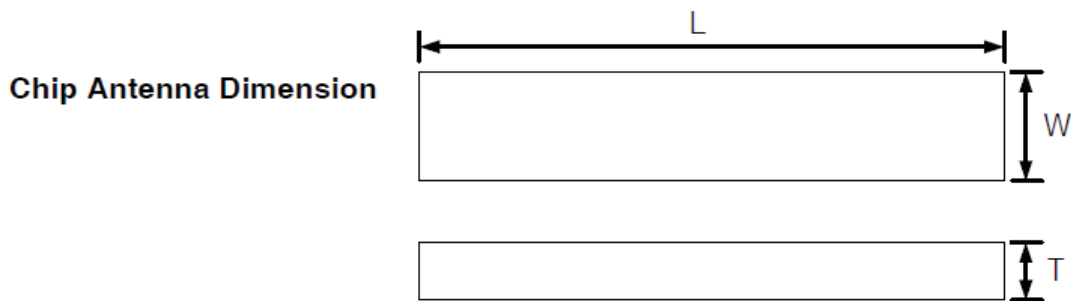


### Recommended Land Pattern

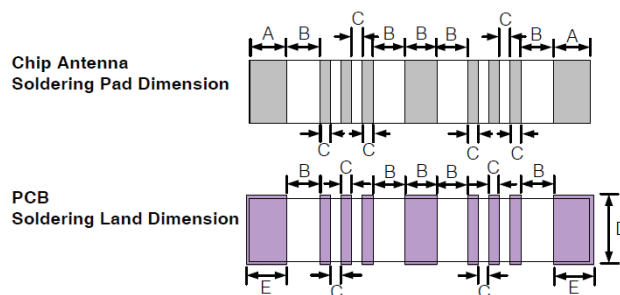

	Condition
Pre-Heating Temperature	120 °C , 60 ~ 300 sec
Soldering Temperature	340°C ± 5°C , 5 sec max per each terminal

(Dimensions: mm)

## REFLOW PROFILE:

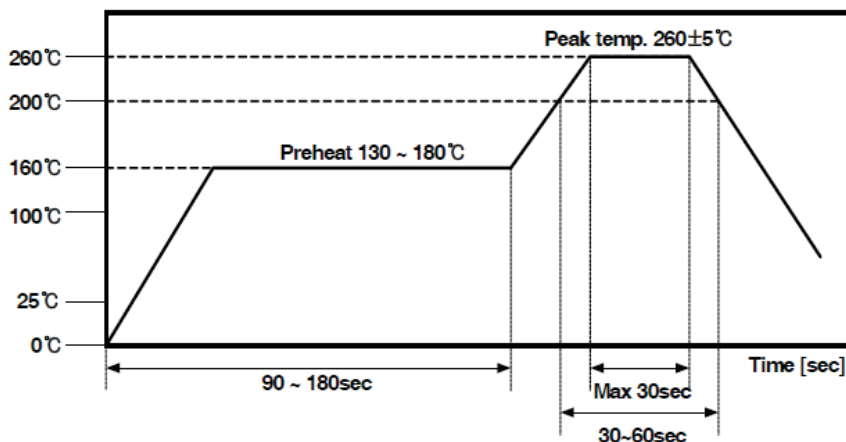

### Manual Soldering

Parameter	L	W	T	A	B	C	D	E
Value (mm)	16.0	3.0	1.4	1.75	1.5	0.5	3.3	1.9
Tol: ± 0.1mm								

# Surface Mount Multiband Chip Antenna 490 / 783 / 868 & 915MHz



16.0 x 3.0 x 1.4mm

**ACA-105-T**




RoHS / RoHS II Compliant




## TAPE & REEL:



**Packaging: 5,000 Units Per Reel**

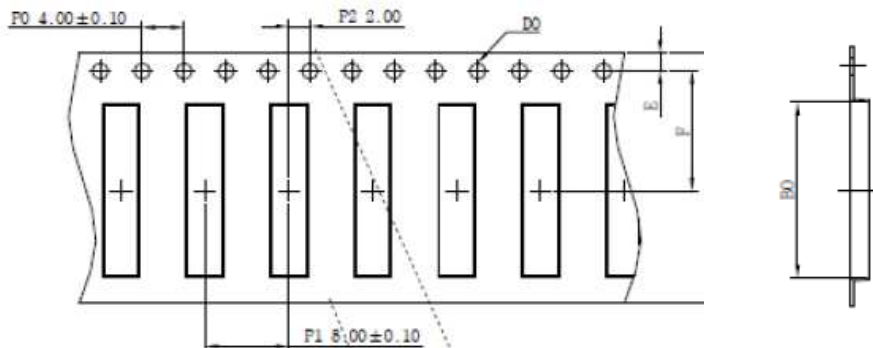


### INPUT MARKING



Taping style

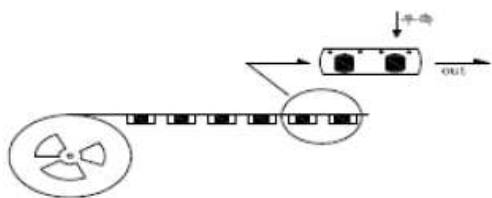

A0	3.3±0.10mm	E	1.75±0.10mm
B0	16.3±0.10mm	F	11.50mm
K0	1.6±0.10mm	t	0.3±0.05mm
D0	1.55±0.50mm	w	24.00±0.30mm

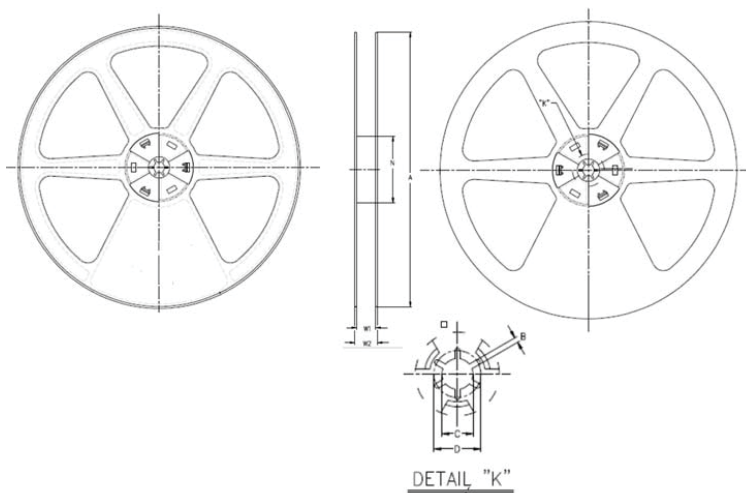

Size	24mm Reel
A	330 +0.2 / -2.0mm
B	2.0 +0.5 / -0.2mm
C	13.0 +0.5 / -0.0mm
D	20.2mm Min
N	80 +3.0 / -0.0mm
W1	24.4 +3.0 / -0.0mm
W2	28.4 +2.0 / -2.0mm

(Dimensions: mm)

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale **Revised: 10.06.14**

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)