



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fixing Accessories for Wirewound Resistors Equipped with AN Collars Suitable for RW - RA - RSSD - RSO



These 2E double right-angle brackets are designed to fix resistors without providing electrical contact. As they are fitted to resistors with fixing insulated connections, they can be mounted on uninsulated panels.

FEATURES


- They are available in three versions:
 - Bracket 2E N Shape
 - Bracket 2E U Shape (restricted space)
 - Brackets 2E T or 2E Z shape designed for models of Ø 40 mm and 50 mm
- The brackets are metal, and are corrosion-resistant
- Material categorization: For definitions of compliance please see www.vishay.com/doc?99912




RoHS
COMPLIANT

DIMENSIONS in millimeters

DOUBLE RIGHT-ANGLE BRACKET 2E N

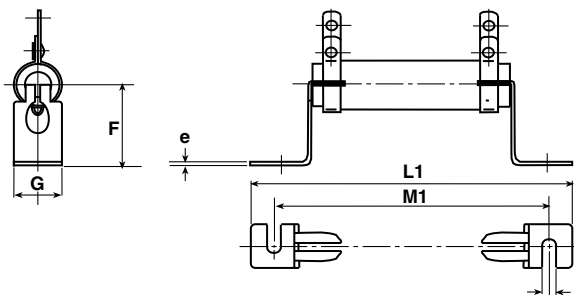

DOUBLE RIGHT-ANGLE BRACKET 2E U

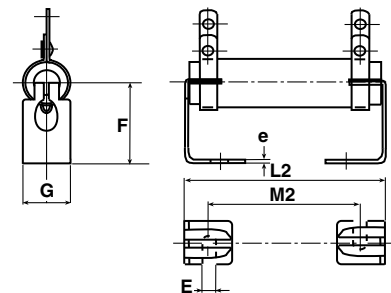

DIMENSIONS in millimeters											
SERIES		BRACKET	E ± 0.1	F ± 1	G ± 0.5	L1 - 0 - 4	M1 - 1 - 4	L2 - 0 - 4	M2 - 0 - 4	E	AVERAGE UNIT WEIGHT IN g
RW RSO RA	RSSD										
8 x 34	8 x 34	2E BN or 2E BU	3.2	21.5	8	58	48	38	26	1	1.8
10 x 50	10 x 50	2E DN or 2E DU	3.2	21.5	10	74	64	54	42	1	2.2
13 x 70		2E DN or 2E DU	3.2	21.5	10	94	84	74	62	1	2.2
	13 x 70	2E FN or 2E FU	4	26.5	14	102.5	88.5	74.5	58	1.2	4.5
16 x 94	16 x 94	2E HN or 2E HU	5	29.5	20	132.5	115.5	98.5	79	1.2	8
20 x 117		2E HN or 2E HU	5	29.5	20	155.5	138.5	121.5	102	1.2	8
	20 x 117	2E KN or 2E KU	5.5	37.5	22	161.5	141.5	121.5	99	1.2	13
25 x 138		2E KN or 2E KU	5.5	37.5	22	182.5	162.5	142.5	120	1.2	13
25 x 168		2E KN or 2E KU	5.5	37.5	22	212.5	192.5	172.5	150	1.2	13
	25 x 138	2E MN or 2E MU	5.5	37.5	22	182.5	162.5	142.5	120	1.2	13
	25 x 168	2E MN or 2E MU	5.5	37.5	22	212.5	192.5	172.5	150	1.2	13
30 x 250		2E PN or 2E PU	8	44.2	30	311	283	255	224	1.5	28
	30 x 250	2E SN or 2E SU	8	44.2	30	311	283	255	224	1.5	28
40 x 370	40 x 370	2E T	9	40	40	448	418	-	-	6	65
50 x 373	50 x 373	2E Z	9	40	40	451	421	-	-	6	65



ORDERING INFORMATION				
MODEL	TYPE	PAIR	LEAD (PB)-FREE	
2E	BN	...	e	
Fixing accessories for RW 8 x 34 AN resistor				

Note

- Brackets are sold in pairs

SAP PART NUMBERING GUIDELINES			
ACCRF	2E	BN	
MODEL	STYLE	TYPE	