



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# ACPL-K49T

Wide Operating Temperature Automotive R<sup>2</sup>Coupler<sup>TM</sup> 20 kBd Digital  
Optocoupler Configurable as Low Power, Low Leakage Phototransistor

**AVAGO**  
TECHNOLOGIES

## Data Sheet




### Description

The ACPL-K49T is a single channel, high temperature, high CMR, 20 kBd digital optocoupler, configurable as a low power, low leakage phototransistor, specifically for use in automotive applications. The stretched SO-8 stretched package outline is designed to be compatible with standard surface mount processes.


This digital optocoupler uses an insulating layer between the light emitting diode and an integrated photo detector to provide electrical insulation between input and output. Separate connections for the photodiode bias and output transistor collector increase the speed up to a hundred times over that of a conventional photo-transistor coupler by reducing the base-collector capacitance.

Avago R<sup>2</sup>Coupler isolation product provides with reinforced insulation and reliability that delivers safe signal isolation critical in automotive and high temperature industrial applications

### Functional Diagram

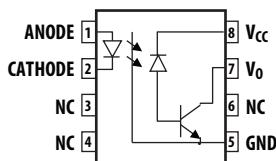

Note: The connection of a 0.1  $\mu$ F bypass capacitor between pins 5 and 8 is recommended for 5-pin configuration.

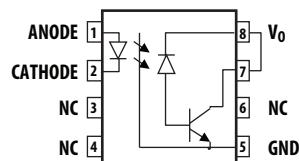

Note: Pins 7 and 8 are externally shorted for 4-pin configuration.

### Features

- High Temperature and Reliability low speed digital interface for Automotive Application.
- 30 kV/ $\mu$ s High Common-Mode Rejection at  $V_{CM} = 1500$  V (typ)
- Low Power, Low Leakage Phototransistor in a "4-pin Configuration"
- Compact, Auto-Insertable Stretched SO8 Packages
- Qualified to AEC Q100 Grade 1 Test Guidelines
- Wide Temperature Range: -40° C to +125° C
- Low LED Drive Current: 4 mA (typ)
- Low Propagation Delay: 20  $\mu$ s (max)
- Worldwide Safety Approval:
  - UL 1577 approval, 5 kV<sub>RMS</sub>/1 min.
  - CSA Approval
  - IEC/EN/DIN EN 60747-5-5

### Applications

- Automotive Low Speed Digital Signal Isolation Interface
- Inverter Fault Feedback Signal Isolation
- Switching Power Supplies Feedback Circuit

### Truth Table

LED	V <sub>o</sub>
ON	LOW
OFF	HIGH

**CAUTION:** It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.

## Ordering Information

Specify part number followed by option number (if desired).

Part number	Option (RoHS Compliant)	Package	Surface Mount	Tape & Reel	UL 5000 V <sub>rms</sub> / 1 Minute rating	IEC/EN/DIN EN 60747-5-5	Quantity
ACPL-K49T	-000E	Stretched SO-8	X		X		80 per tube
	-060E		X		X	X	80 per tube
	-500E		X	X	X		1000 per reel
	-560E		X	X	X	X	1000 per reel


To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

### Example 1:

ACPL-K49T-560E to order product of SSO-8 Surface Mount package in Tape and Reel packaging with IEC/EN/DIN EN 60747-5-5 Safety Approval in RoHS compliant.

Option datasheets are available. Contact your Avago sales representative or authorized distributor for information.

## Outline Drawing (Stretched SO8)

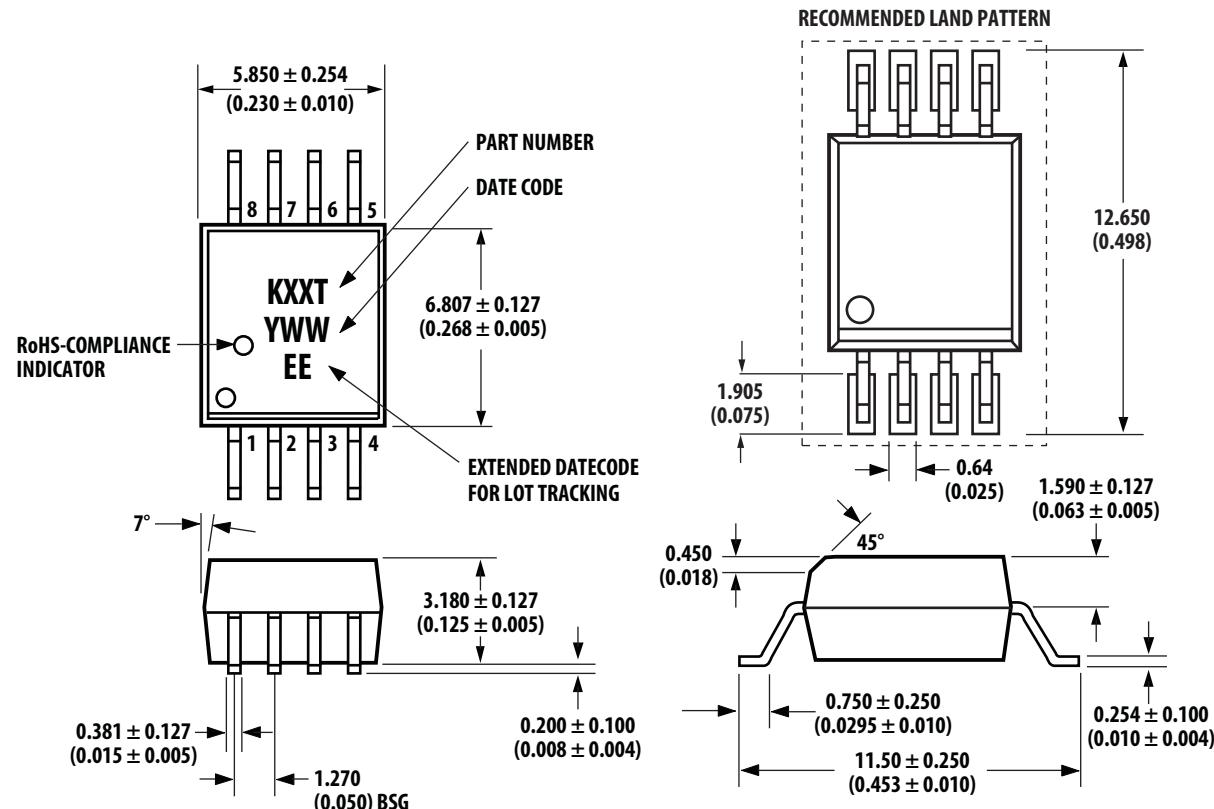

Dimensions in millimeters and (inches).

### Note:

Lead coplanarity = 0.1 mm (0.004 inches).

Floating lead protrusion = 0.25mm (10mils) max.

## Recommended Pb-Free IR Reflow Profile

Recommended reflow condition as per JEDEC Standard, J-STD-020 (latest revision).

Note: Non-halide flux should be used

## Regulatory Information

The ACPL-K49T is approved by the following organizations:

### UL

Approval under UL 1577, component recognition program up to  $V_{ISO} = 5 \text{ kV}_{RMS}$ .

### CSA

Approval under CSA Component Acceptance Notice #5.

### IEC/EN/DIN EN 60747-5-5

Approval under IEC/EN/DIN EN 60747-5-5

## Insulation and Safety Related Specifications

Parameter	Symbol	ACPL-K49T	Units	Conditions
Minimum External Air Gap (Clearance)	L(101)	8	mm	Measured from input terminals to output terminals, shortest distance through air.
Minimum External Tracking (Creepage)	L(102)	8	mm	Measured from input terminals to output terminals, shortest distance path along body.
Minimum Internal Plastic Gap (Internal Clearance)		0.08	mm	Through insulation distance conductor to conductor, usually the straight line distance thickness between the emitter and detector.
Tracking Resistance (Comparative Tracking Index)	CTI	175	V	DIN IEC 112/VDE 0303 Part 1
Isolation Group (DIN VDE0109)	IIIa			Material Group (DIN VDE 0109)

## IEC/EN/DIN EN 60747-5-5 Insulation Related Characteristic (Option 060E and 560E)

Description	Symbol	Characteristic	Units
Installation classification per DIN VDE 0110/1.89, Table 1			
for rated mains voltage $\leq 150 \text{ V}_{rms}$		I-IV	
for rated mains voltage $\leq 300 \text{ V}_{rms}$		I-IV	
for rated mains voltage $\leq 450 \text{ V}_{rms}$		I-IV	
for rated mains voltage $\leq 600 \text{ V}_{rms}$		I-IV	
for rated mains voltage $\leq 1000 \text{ V}_{rms}$		I-III	
Climatic Classification		55/100/21	
Pollution Degree (DIN VDE 0110/1.89)		2	
Maximum Working Insulation Voltage	$V_{IORM}$	1140	$V_{PEAK}$
Input to Output Test Voltage, Method b	$V_{PR}$	2137	$V_{PEAK}$
$V_{IORM} \times 1.875 = V_{PR}$ , 100% Production Test with $t_m = 1 \text{ sec}$			
Partial Discharge $< 5 \text{ pC}$			
Input to Output Test Voltage, Method a	$V_{PR}$	1824	$V_{PEAK}$
$V_{IORM} \times 1.6 = V_{PR}$ , Type and sample test, $t_m = 10 \text{ sec}$ ,			
Partial Discharge $< 5 \text{ pC}$			
Highest Allowable Overvoltage (Transient Overvoltage, $t_{ini} = 60 \text{ sec}$ )	$V_{IOTM}$	8000	$V_{PEAK}$
Safety Limiting Values (Maximum values allowed in the event of a failure)			
Case Temperature	$T_S$	175	$^{\circ}\text{C}$
Input Current	$I_{S,INPUT}$	230	mA
Output Power	$P_{S,OUTPUT}$	600	mW
Insulation Resistance at $T_S$ , $V_{IO} = 500 \text{ V}$	$R_S$	$10^9$	$\Omega$

## Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Units	Note
Storage Temperature	T <sub>S</sub>	-55	150	°C	
Operating Temperature	T <sub>A</sub>	-40	125	°C	
Lead Soldering Cycle	Temperature		260	°C	
	Time		10	s	
Average Forward Input Current	I <sub>F(avg)</sub>	20		mA	
Peak Forward Input Current (50% duty cycle, 1ms pulse width)	I <sub>F(peak)</sub>	40		mA	
Peak Transient Input Current (< = 1 μs pulse width, 300 ps)	I <sub>F(trans)</sub>	100		mA	
Reversed Input Voltage	V <sub>R</sub>	5		V	
Input Power Dissipation	P <sub>IN</sub>	30		mW	
Output Power Dissipation	P <sub>O</sub>	100		mW	
Average Output Current	I <sub>O</sub>	8		mA	
Peak Output Current	I <sub>O(pk)</sub>	16		mA	
Supply Voltage	V <sub>CC</sub>	-0.5	30	V	
Output Voltage	V <sub>O</sub>	-0.5	20	V	

## Recommended Operating Conditions

Parameter	Symbol	Min.	Max.	Units	Note
Supply Voltage	V <sub>CC</sub>	20.0		V	
Operating Temperature	T <sub>A</sub>	-40	125	°C	

## Electrical Specifications (DC) for 5-Pin Configuration

Over recommended operating T<sub>A</sub> = -40° C to 125° C, unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions	Fig.	Note
Current Transfer Ratio	CTR	32	65	100	%	T <sub>A</sub> = 25° C V <sub>CC</sub> = 4.5 V, V <sub>O</sub> = 0.5 V, I <sub>F</sub> = 10 mA	1,2,4	1
		24	65					
		65	110	150		T <sub>A</sub> = 25° C V <sub>CC</sub> = 4.5 V, V <sub>O</sub> = 0.5 V, I <sub>F</sub> = 4 mA	1,2,4	
		50	110					
Logic Low Output Voltage	V <sub>OL</sub>	0.1	0.5	V		V <sub>CC</sub> = 4.5 V, I <sub>F</sub> = 10 mA, I <sub>O</sub> = 2.4 mA	3	
		0.1	0.5			V <sub>CC</sub> = 4.5 V, I <sub>F</sub> = 4 mA, I <sub>O</sub> = 2.0 mA		
Logic High Output Current	I <sub>OH</sub>	2x10 <sup>-4</sup>	0.5	μA		T <sub>A</sub> = 25° C V <sub>O</sub> = V <sub>CC</sub> = 5.5 V I <sub>F</sub> = 0 mA	7	
		4x10 <sup>-4</sup>	5			V <sub>O</sub> = V <sub>CC</sub> = 20 V		
Logic Low Supply Current	I <sub>ICL</sub>	35	100	μA		I <sub>F</sub> = 4 mA, V <sub>O</sub> = open, V <sub>CC</sub> = 20 V		
Logic High Supply Current	I <sub>ICH</sub>	0.02	1	μA		T <sub>A</sub> = 25° C I <sub>F</sub> = 0 mA, V <sub>O</sub> = open, V <sub>CC</sub> = 20 V		
			2.5	μA				
Input Forward Voltage	V <sub>F</sub>	1.4	1.5	1.7	V	T <sub>A</sub> = 25° C I <sub>F</sub> = 4 mA	6	
		1.2	1.5	1.8	V			
Input Reversed Breakdown Voltage	BV <sub>R</sub>	5		V		I <sub>R</sub> = 10 μA		
Temperature Coefficient of Forward Voltage	ΔV/ΔT <sub>A</sub>	-1.5		mV/°C		I <sub>F</sub> = 10 mA		
Input Capacitance	C <sub>IN</sub>	90		pF		F = 1 MHz, V <sub>F</sub> = 0 V		

### Switching Specifications (AC) for 5-Pin Configuration

Over recommended operating ( $T_A = -40^\circ C$  to  $125^\circ C$ ),  $V_{CC} = 5.0 V$  unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions	Fig.	Note
Propagation Delay Time to Logic Low at Output	$t_{PHL}$			20	$\mu s$	Pulse: $f = 10$ kHz, Duty cycle = 50%, $I_F = 4$ mA, $V_{CC} = 5.0$ V, $R_L = 8.2$ k $\Omega$ , $C_L = 15$ pF, $V_{THHL} = 1.5$ V	9	
Propagation Delay Time to Logic High at Output	$t_{PLH}$			20	$\mu s$	Pulse: $f = 10$ kHz, Duty cycle = 50%, $I_F = 4$ mA, $V_{CC} = 5.0$ V, $R_L = 8.2$ k $\Omega$ , $C_L = 15$ pF, $V_{THLH} = 2.0$ V	9	
Common Mode Transient Immunity at Logic High Output	$ CM_H $	15	30		kV/ $\mu s$	$I_F = 0$ mA $V_{CM} = 1500$ V <sub>p-p</sub> , $T_A = 25^\circ C$ $R_L = 1.9$ k $\Omega$	10	4
Common Mode Transient Immunity at Logic Low Output	$ CM_L $	15	30		kV/vs	$I_F = 10$ mA		
Common Mode Transient Immunity at Logic Low Output	$ CM_L $		15		kV/ $\mu s$	$I_F = 4$ mA $V_{CM} = 1500$ V <sub>p-p</sub> , $T_A = 25^\circ C$ $R_L = 8.2$ k $\Omega$		

### Electrical Specifications (DC) for 4-Pin Configuration

Over recommended operating  $T_A = -40^\circ C$  to  $125^\circ C$ , unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions	Fig.	Note
Current Transfer Ratio	$CTR$	70	130	210	%	$T_A = 25^\circ C$ , $V_{CC} = V_O = 5$ V, $I_F = 4$ mA	4	1
Current Transfer Ratio (Sat)	$CTR$	24	60			$I_F = 10$ mA $V_{CC} = V_O = 0.5$ V	5	
		35	110			$I_F = 4$ mA		
Logic Low Output Voltage	$V_{OL}$		0.1	0.5	V	$I_F = 10$ mA $I_O = 2.4$ mA	5	
			0.1	0.5		$I_F = 4$ mA $I_O = 1.4$ mA		
Off-State Current	$I_{(CEO)}$		$4 \times 10^{-4}$	5	$\mu A$	$V_O = V_{CC} = 20$ V, $I_F = 0$ mA	8	
Input Forward Voltage	$V_F$	1.4	1.5	1.7	V	$T_A = 25^\circ C$ $I_F = 4$ mA	6	
		1.2	1.5	1.8	V			
Input Reversed Breakdown Voltage	$BV_R$	5			V	$I_R = 10$ $\mu A$		
Temperature Coefficient of Forward Voltage	$\Delta V/\Delta T_A$		-1.5		mV/ $^\circ C$	$I_F = 10$ mA		
Input Capacitance	$C_{IN}$		90		pF	$f = 1$ MHz, $V_F = 0$ V		
Output Capacitance	$C_{CE}$		35		pF	$f = 1$ MHz, $V_F = 0$ V, $V_O = V_{CC} = 0$ V		

## Switching Specifications (AC) for 4-Pin Configuration

Over recommended operating ( $T_A = -40^\circ C$  to  $125^\circ C$ ),  $V_{CC} = 5.0 V$  unless otherwise specified.

Parameter	Sym.	Min.	Typ.	Max.	Units	Conditions	Fig.	Note	
Propagation Delay Time to Logic Low at Output	$t_{PHL}$	2	100	$\mu s$		Pulse: $f = 1$ kHz, Duty cycle = 50%, $I_F = 4$ mA, $V_{CC} = 5.0$ V, $R_L = 8.2$ k $\Omega$ , $C_L = 15$ pF, $V_{THHL} = 1.5$ V	10		
Propagation Delay Time to Logic High at Output	$t_{PLH}$	19	100	$\mu s$		Pulse: $f = 1$ kHz, Duty cycle = 50%, $I_F = 4$ mA, $V_{CC} = 5.0$ V, $R_L = 8.2$ k $\Omega$ , $C_L = 15$ pF, $V_{THLH} = 2.0$ V	10		
Common Mode Transient Immunity at Logic Low Output	$ CM_L $	15	30		kV/ $\mu s$	$I_F = 0$ mA	$V_{CM} = 1500$ V <sub>p-p</sub> , $T_A = 25^\circ C$ $R_L = 8.2$ k $\Omega$	12	4
Common Mode Transient Immunity at Logic Low Output	$ CM_L $	15	30		kV/ $\mu s$	$I_F = 4$ mA	$V_{CM} = 1500$ V <sub>p-p</sub> , $T_A = 25^\circ C$ $R_L = 8.2$ k $\Omega$		







## Package Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions	Fig.	Note
Input-Output Momentary Withstand Voltage*	$V_{ISO}$	5000			V <sub>RMS</sub>	RH $\leq$ 50%, $t = 1$ min; $T_A = 25^\circ C$		2, 3
Input-Output Resistance	$R_{I-O}$		$10^{14}$		$\Omega$	$V_{I-O} = 500$ V <sub>dc</sub>		2
Input-Output Capacitance	$C_{I-O}$		0.6		pF	$f = 1$ MHz; $V_{I-O} = 0$ V <sub>DC</sub>		2

\* The Input-Output Momentary Withstand Voltage is a dielectric voltage rating that should not be interpreted as an input-output continuous voltage rating.

Notes:

1. Current Transfer Ratio in percent is defined as the ratio of output collector current,  $I_O$ , to the forward LED input current,  $I_F$ , times 100.
2. Device considered a two terminal device: pins 1, 2, 3 and 4 shorted together, and pins 5, 6, 7 and 8 shorted together.
3. In accordance with UL 1577, each optocoupler is proof tested by applying an insulation test voltage  $\geq 6000$  V<sub>RMS</sub> for 1 second.
4. Common transient immunity in a Logic High level is the maximum tolerable (positive)  $dV_{CM}/dt$  on the rising edge of the common mode pulse,  $V_{CM}$ , to assure that the output will remain in a Logic High state (i.e.,  $V_O > 2.0$  V). Common mode transient immunity in a Logic Low level is the maximum tolerable (negative)  $dV_{CM}/dt$  on the falling edge of the common mode pulse signal,  $V_{CM}$  to assure that the output will remain in a Logic Low state (i.e.,  $V_O < 0.8$  V).

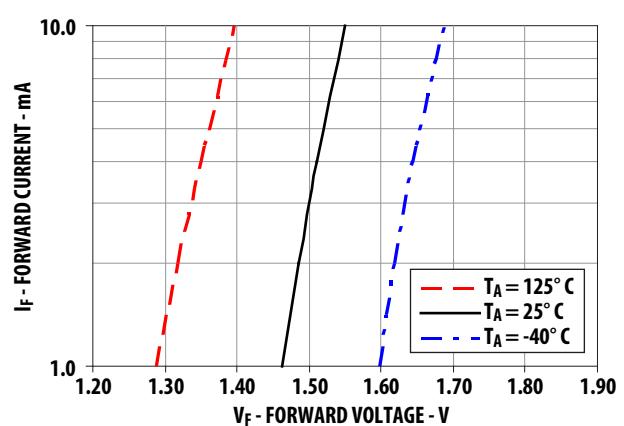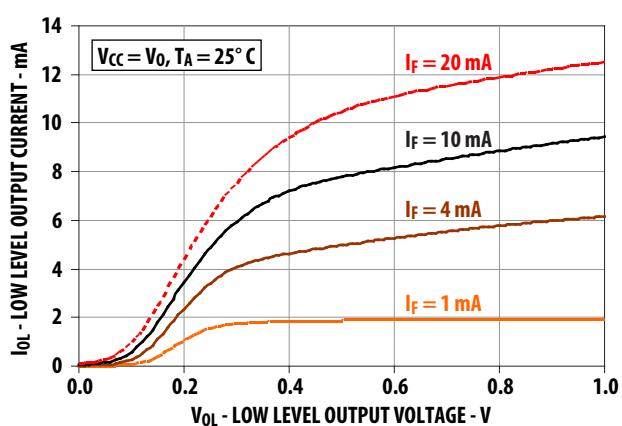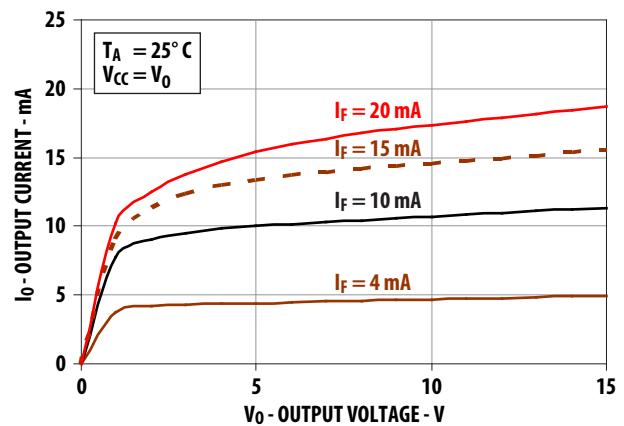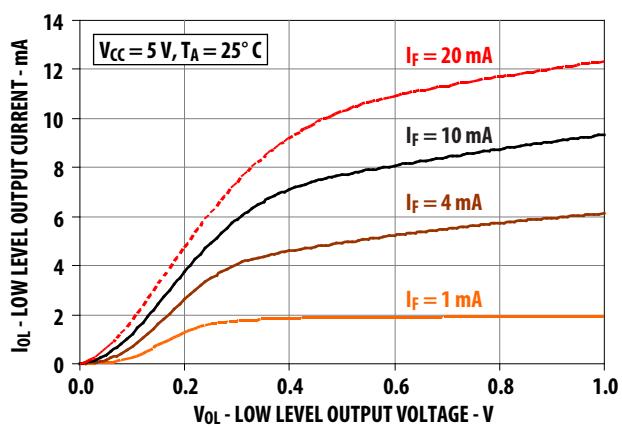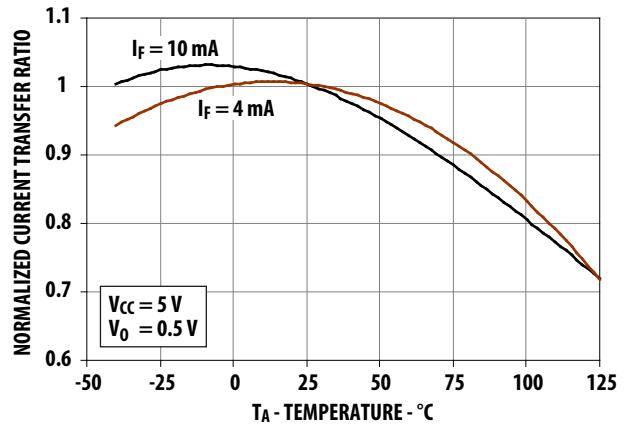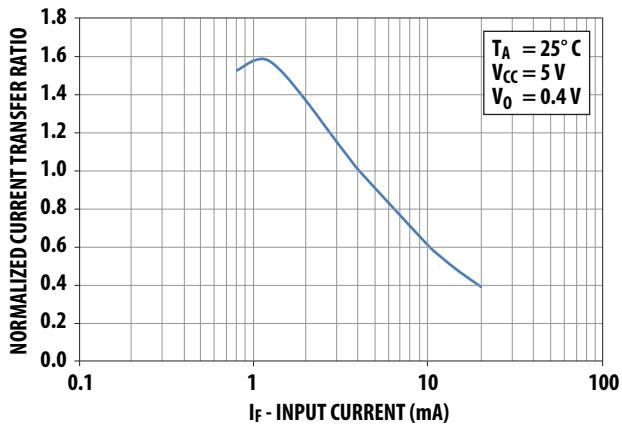

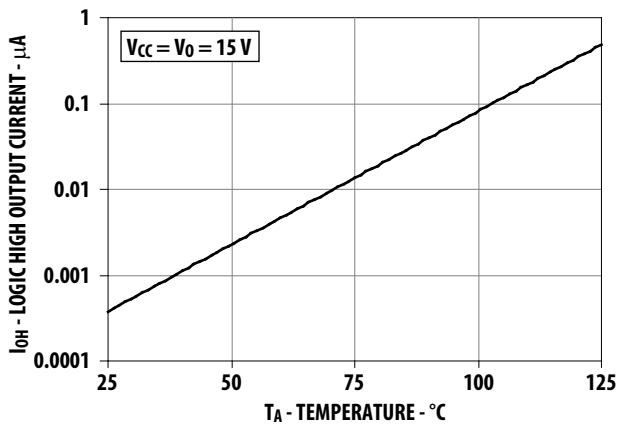


Figure 7. Typical High Level Output Current vs Temperature

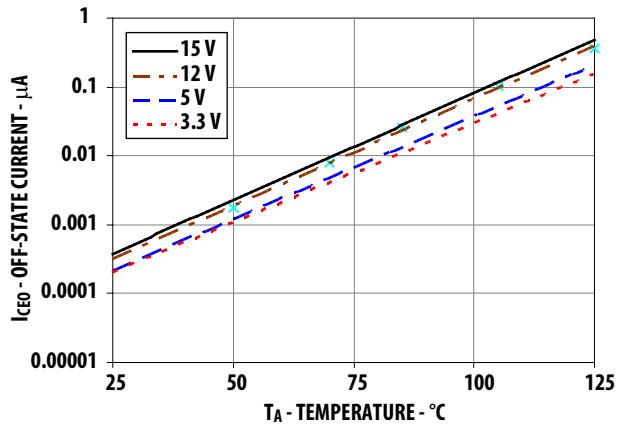


Figure 8. Typical Off-State Current vs Temperature (4-Pin Configuration)

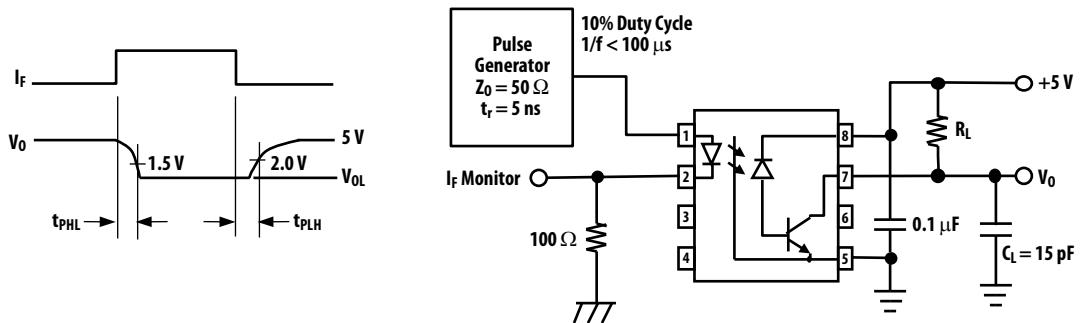


Figure 9. Switching Test Circuit (5-Pin Configuration)

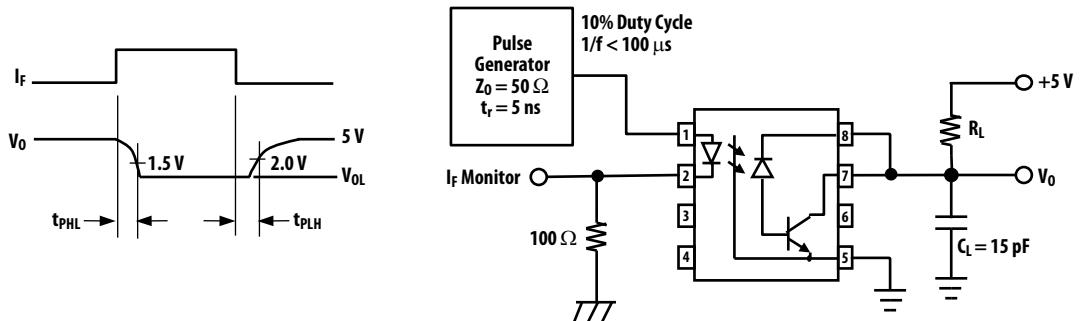


Figure 10. Switching Test Circuit (4-Pin Configuration)

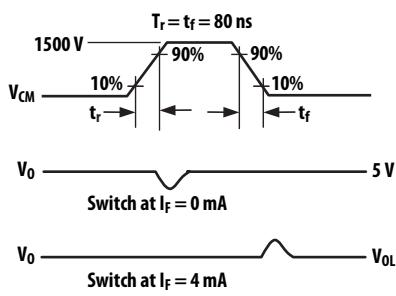


Figure 11. Test Circuit for Transient Immunity and Typical Waveforms (5-Pin Configuration)

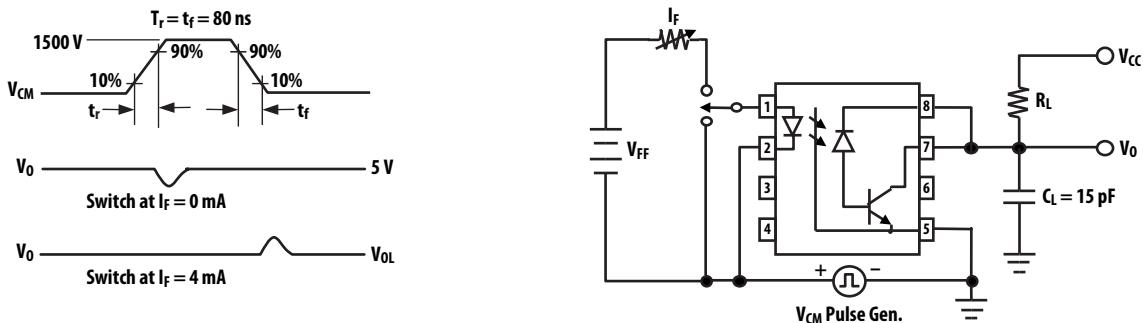


Figure 12. Test Circuit for Transient Immunity and Typical Waveforms (4-Pin Configuration)

### Thermal Resistance Model for ACPL-K49T

The diagram of ACPL-K49T for measurement is shown in Figure 13. Here, one die is heated first and the temperatures of all the dice are recorded after thermal equilibrium is reached. Then, the 2<sup>nd</sup> die is heated and all the dice temperatures are recorded. With the known ambient temperature, the die junction temperature and power dissipation, the thermal resistance can be calculated. The thermal resistance calculation can be cast in matrix form. This yields a 2 by 2 matrix for our case of two heat sources.

$$\begin{vmatrix} R_{11} & R_{12} \\ R_{21} & R_{22} \end{vmatrix} \times \begin{vmatrix} P_1 \\ P_2 \end{vmatrix} = \begin{vmatrix} \Delta T_1 \\ \Delta T_2 \end{vmatrix}$$

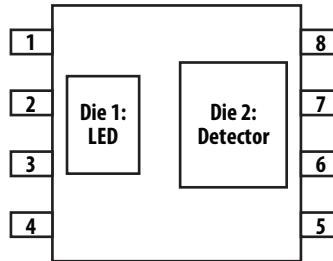


Figure 13, Diagram of ACPL-K49T for measurement

$R_{11}$ : Thermal Resistance of Die1 due to heating of Die1

$R_{12}$ : Thermal Resistance of Die1 due to heating of Die2.

$R_{21}$ : Thermal Resistance of Die2 due to heating of Die1.

$R_{22}$ : Thermal Resistance of Die2 due to heating of Die2.

$P_1$ : Power dissipation of Die1 (W).

$P_2$ : Power dissipation of Die2 (W).

$T_1$ : Junction temperature of Die1 due to heat from all dice (°C).

$T_2$ : Junction temperature of Die2 due to heat from all dice.

$T_a$ : Ambient temperature.

$\Delta T_1$ : Temperature difference between Die1 junction and ambient (°C).

$\Delta T_2$ : Temperature difference between Die2 junction and ambient (°C).

$$T_1 = (R_{11} \times P_1 + R_{12} \times P_2) + T_a$$

$$T_2 = (R_{21} \times P_1 + R_{22} \times P_2) + T_a$$

Measurement data on a low K board:

$$R_{11} = 160 \text{ °C/W}, R_{12} = R_{21} = 74 \text{ °C/W}, R_{22} = 115 \text{ °C/W}$$

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries.

Data subject to change. Copyright © 2005-2014 Avago Technologies. All rights reserved.

AV02-3157EN - March 31, 2014

**AVAGO**  
TECHNOLOGIES