



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ADAM-6521 Series

**Industrial Ethernet  
Switches with 4 x  
10/100Base-TX Ports  
& 1 x 100Base-FX  
Fiber Optic Port**

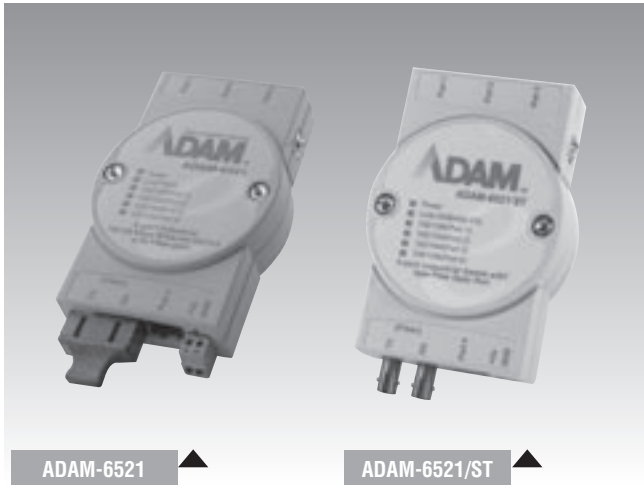

CE FCC

## Features

- Provides 4 x 10/100 Mbps Ethernet ports with RJ-45 connector
- Provides 1 x 100 Mbps multi/single-mode fiber port with SC/ST connector
- Supports full/half duplex flow control
- Supports Integrated Loop-up engine
- Supports MDI/MDI-X auto crossover
- Provides broadcast storm protection
- Supports +10 ~ 30 V<sub>DC</sub> voltage power input
- Provides surge (EFT) protection 3,000 V<sub>DC</sub> for power line
- Supports 4,000 VDC Ethernet ESD protection
- Provides flexible mounting: DIN-rail, Wall, Stack
- Supports operating temperatures from -10 ~ 65° C

## Introduction

ADAM-6521 and ADAM-6521S are industrial-grade Ethernet switch with a fiber optic port that makes it possible to expand industrial networks fast and cost-effectively. ADAM-6521 and ADAM-6521S of 1 fiber port and 4-RJ-45 ports. With fiber optics, you can prevent noise interfering with your system and implement transmission distances up to 15 km.

ADAM-6521 and ADAM-6521S are especially suited for industrial environments with Ethernet networking needs such as: semi-conductor factories, inventory control environments, assembly line and production and more.

ADAM-6521 and ADAM-6521S support a wide voltage range of +10 ~ 30 V<sub>DC</sub> over the terminal block, and 3,000 V<sub>DC</sub> surge (EFT) protection to protect it from being damaged by over-voltage. A wide operating temperature range from -10 to 65° C (14 ~ 149° F), makes it functional in harsh operating environments. They also have six inclusive LED indicators which make troubleshooting the ADAM-6521 and ADAM-6521S easier. Each port has a pair of LEDs that indicate link status and transmission speed. This function conveniently informs users of any collisions, the link status, power failure and data receipts for immediate on-site diagnostics.

## Specifications

### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x
- **LAN** 10/100Base-T, 100Base-FX
- **Transmission Distance** Ethernet : Up to 100 m  
Multi-mode Fiber : Up to 2 km  
(ADAM-6521, ADAM-6521/ST)  
Single-mode Fiber : Up to 15 km (ADAM-6521S)
- **Transmission Speed** Up to 100 Mbps

### Interface

- **Connectors** 4 x RJ-45, 1 x SC type fiber connector (ADAM-6521, ADAM-6521S) or 1 x ST type fiber connector (ADAM-6521/ST)  
2-pin removable screw terminal (power)
- **LED Indicators** Power, Link (100Base-FX), 100/10M (Ethernet)

### Power

- **Power Consumption** ADAM-6521, ADAM-6521/ST: Max. 3 W  
ADAM-6521S: Max. 4 W
- **Power Input** 1 x Unregulated 10 ~ 30 V<sub>DC</sub>

### Mechanism

- **Dimensions (W x H x D)** 70 x 112 x 27 mm
- **Enclosure** IP30, ABS+PC with solid mounting kits
- **Mounting** DIN 35 rail, Wall, Stack

### Protection

- **ESD (Ethernet)** 4,000 V<sub>DC</sub>
- **Surge (EFT for power)** 3,000 V<sub>DC</sub>

### Environment

- **Operating Temperature** -10 ~ 65° C (14 ~ 149° F)  
stack : -10 ~ 60° C (14 ~ 140° F)
- **Storage Temperature** -20 ~ 80° C (-4 ~ 176° F)
- **Operating Humidity** 20 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 1,150,000 hrs

### Certifications

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMC** U.S.A.: FCC Part 15 CISPR 22  
EU: EN55011, EN61000-6-4  
EN55022 Class A,  
EN61000-3-2/3,  
EN55024,  
IEC61000-4-2/3/4/5/6/8/11  
EN61000-6-2

## Ordering Information

- **ADAM-6521** Industrial Ethernet Switch with 4 x 10/100Base-TX Ports & 1 Multi-mode SC Type Fiber Optic Port
- **ADAM-6521/ST** Industrial Ethernet Switch with 4 x 10/100Base-TX Ports & 1 Multi-mode ST Type Fiber Optic Port
- **ADAM-6521S** Industrial Ethernet Switch with 4 x 10/100Base-TX Ports & 1 Single-mode SC Type Fiber Optic Port