



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






A
B
C
D
E
F

G
H

A
B
C
D
E
F

G
H

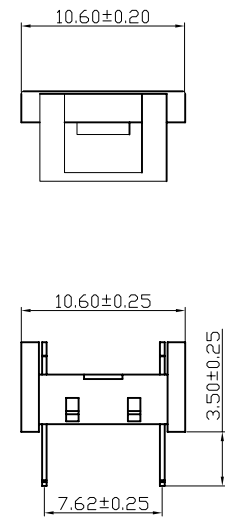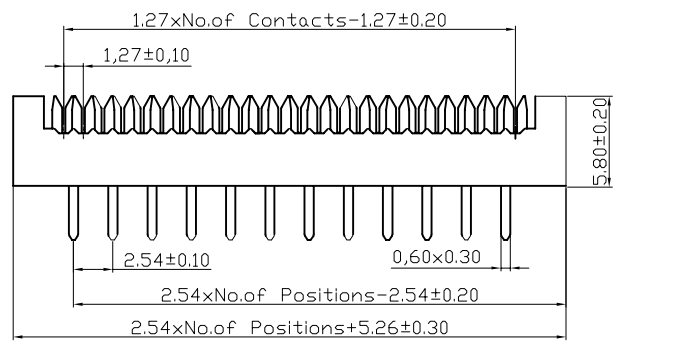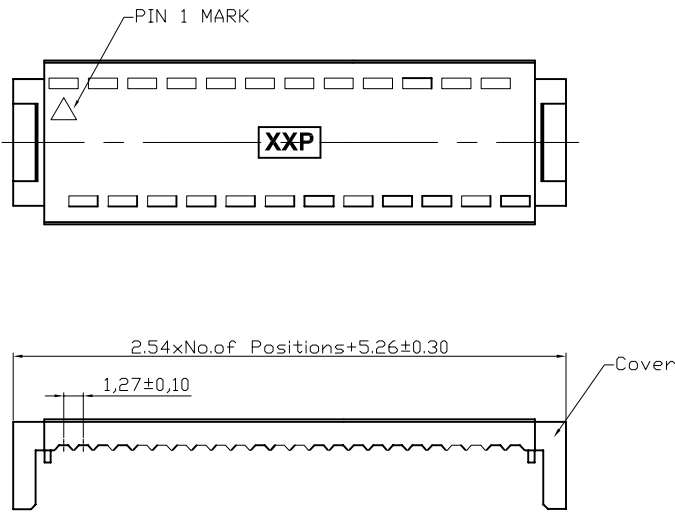

NOTES:

MATERIAL

- 1. Insulator Material: PBT+30%GF(UL94V-0), Black
- 2. Contact Material : Brass
- 3. Contact Plating : Sn Over Ni


ELECTRICAL

- 1. Current Rating : 3.0AMP
- 2. Withstand Voltage : 1000V AC/DC
- 4. Contact Resistance : 20mΩ max
- 5. Insulation Resistance: 1000MΩ min

ENVIRONMENTAL

- 1. Operation Temperature: -40°C to +105°C
- 2. Packing : Tray

Order Information(2.54x7.62):
contacts xx : 08,10,14,16,18,20

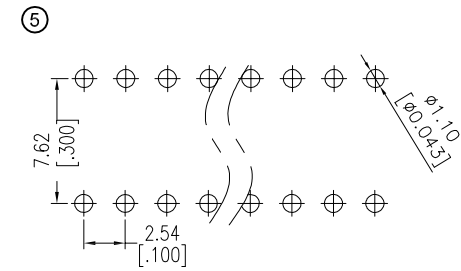

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

RoHS compliant

Scale	1:1					Date	Name	Customer-No.
TOLERANCE		⑤	Add recommended PCB layout	16.07.2015	Ray	Drawn	25.01.2006	Alex
X.X	±0.40	④	Add sheet 2	21.01.2010	Dean	Approved	16.07.2015	Ray
X.XX	±0.25	③	Modify drawing	28.12.2009	Dean			
X.XXX	±0.15	②	Update	02.07.2009	Dean			
Angle	±3°	①	Drawn	25.01.2006	Alex			
		Id.	Modification	Date	Name			

ASSMANN WSW-NO. ADIP xx Z-LC	
Drawing-No.	
ASS 2320 CO	rev05
Replace	Sheet 1/2

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F

F

G

G

H

H

NOTES:

MATERIAL

1. Insulator Material: PBT+30%GF(UL94V-0), Black
2. Contact Material : Brass
3. Contact Plating : Sn Over Ni




ELECTRICAL

1. Current Rating : 1.0AMP
2. Withstand Voltage : 500V AC/DC
4. Contact Resistance : 30mΩ max at 1 AMP DC.
5. Insulation Resistance: 1000MΩ at 500 VDC

ENVIRONMENTAL

1. Packing : Tray


Order Information(2.54x15.24):
contacts xx : 24,28,40

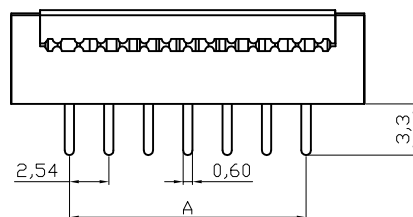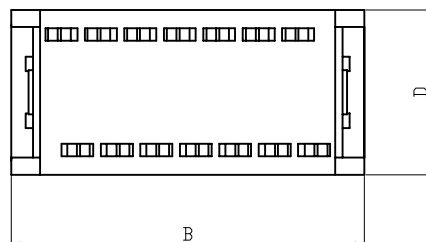

Dimensions (Pitch=15.24mm)

Positions	A	B	C	D
24	27.94	35.74	15.24	18.22
28	33.02	40.82	15.24	18.22
40	48.26	56.06	15.24	18.22

RoHS compliant

Scale	1:1						Date	Name	Customer-No.
TOLERANCE		⑤	Add recommended PCB layout	16.07.2015	Ray	Drawn	25.01.2006	Alex	ASSMANN WSW-No. ADIP xx Z-LC
X.	±0.38	④	Add sheet 2	21.01.2010	Dean	Approved	16.07.2015	Ray	
X.X	±0.25	③	Modify drawing	28.12.2009	Dean				
X.XX	±0.13	②	Update	02.07.2009	Dean				Drawing-No.
Angle		①	Drawn	25.01.2006	Alex				ASS 2320 CO
X°	±3°								rev05
X.X°	±1°								Sheet
		Id.	Modification	Date	Name			Replace	2/2

1

2

3

4

5

6

7