



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





MCP3911
ADC Evaluation Board
for 16-Bit MCUs
User's Guide

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC³² logo, rPIC and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MXDEV, MXLAB, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Application Maestro, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscient Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICKit, PICtail, REAL ICE, rLAB, Select Mode, Total Endurance, TSHARC, UniWinDriver, WiperLock and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

All other trademarks mentioned herein are property of their respective companies.

© 2012, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

 Printed on recycled paper.

ISBN: 978-1-62076-120-5

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

**QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO/TS 16949 =**



MCP3911 ADC EVALUATION BOARD FOR 16-BIT MCUs USER'S GUIDE

Table of Contents

Preface	5
Introduction	5
Document Layout	5
Conventions Used in this Guide	6
Recommended Reading	7
The Microchip Web Site	7
Customer Support	7
Document Revision History	7
Chapter 1. Hardware Description	
1.1 Overview	9
1.2 PIM Module/MCP3911 Connection and Peripheral Usage Overview	11
1.3 Analog Input Structure	13
1.4 Universal Serial Bus (USB)	13
Chapter 2. Evaluation Board PC Software	
2.1 Overview	15
Appendix A. Schematics and Layouts	
A.1 Introduction	17
A.2 Schematic - ADC and Power	18
A.3 Schematic - Microcontroller (MCU)	19
A.4 Schematic - PIM Module	20
A.5 Schematic - LCD and UART	21
A.6 Board - Top Trace and Top Silk	22
A.7 Board - bottom Trace and bottom Silk	22
A.8 Board - LAYER #2 GND	23
A.9 Board - LAYER #3 VDD	23
A.10 Board - Top SILK and PADS	24
A.11 Board - Bottom SILK and PADS	24
Appendix B. Bill of Materials (BOM)	25
Worldwide Sales and Service	28

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

NOTES:



MCP3911 ADC EVALUATION BOARD FOR 16-BIT MCUs USER'S GUIDE

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXA”, where “XXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the MCP3911 ADC Evaluation Board for 16-Bit MCUs. Items discussed in this chapter include:

- Document Layout
- Conventions Used in this Guide
- Recommended Reading
- The Microchip Web Site
- Customer Support
- Document Revision History

DOCUMENT LAYOUT

This document describes how to use the MCP3911 ADC Evaluation Board for 16-Bit MCUs as a development tool to emulate and debug firmware on a target board. The manual layout is as follows:

- **Chapter 1. “Hardware Description”** – Provides important information about the MCP3911 ADC Evaluation Board for 16-Bit MCUs hardware.
- **Chapter 2. “Firmware”** – Describes the MCP3911 ADC Evaluation Board for 16-Bit MCUs firmware.
- **Chapter 2. “Evaluation Board PC Software”** – Provides information about the evaluation board software.
- **Appendix A. “Schematics and Layouts”** – Shows the schematic and board layouts for the MCP3911 ADC Evaluation Board for 16-Bit MCUs.
- **Appendix B. “Bill of Materials (BOM)”** – Lists the parts used to build the MCP3911 ADC Evaluation Board for 16-Bit MCUs.

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

RECOMMENDED READING

This user's guide describes how to use MCP3911 ADC Evaluation Board for 16-Bit MCUs. Another useful document is listed below. The following Microchip document is available and recommended as a supplemental reference resource:

- **MCP3911 Data Sheet - “3.3V Two Channel Analog Front End” (DS22286)**

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at: <http://support.microchip.com>.

DOCUMENT REVISION HISTORY

Revision A (March 2012)

- Initial release of this document.

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

NOTES:



MCP3911 ADC EVALUATION BOARD FOR 16-BIT MCUs USER'S GUIDE

Chapter 1. Hardware Description

1.1 OVERVIEW

The MCP3911 ADC Evaluation Board for 16-Bit MCUs system provides the opportunity to evaluate the performance of the MCP3911 dual-channel ADC. It also provides a development platform for 16-bit PIC[®]-based applications, using existing 100-pin PIC microcontroller Plug-in Module (PIM) systems that are compatible with the Explorer 16 and other high pin count PIC[®]-based demo boards. The system comes with a programmed PIC24FJ256GA110 PIM module that communicates with the Energy Management Utility software for data exchange and ADC setup.

1.1.1 Feature Highlights

- Dual ADC MCP3911 output display using serial communication to the PC software interface
- Simultaneous 55 ksp/s at OSR32 address loop ALL or 95 dB SINAD at OSR512 performance on MCP3911
- System and ADC performance analysis through graphical PC tools showing noise histogram, frequency domain (FFT), time domain scope plot, and statistical numerical analysis
- Robust hardware design with analog grounding and analog/digital separation, allowing low noise evaluation of MCP3911 devices; includes separate power supplies and power planes on a 4-layer board.
- PICtail[™] Plus connectors for Explorer 16 daughter board compatibility

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

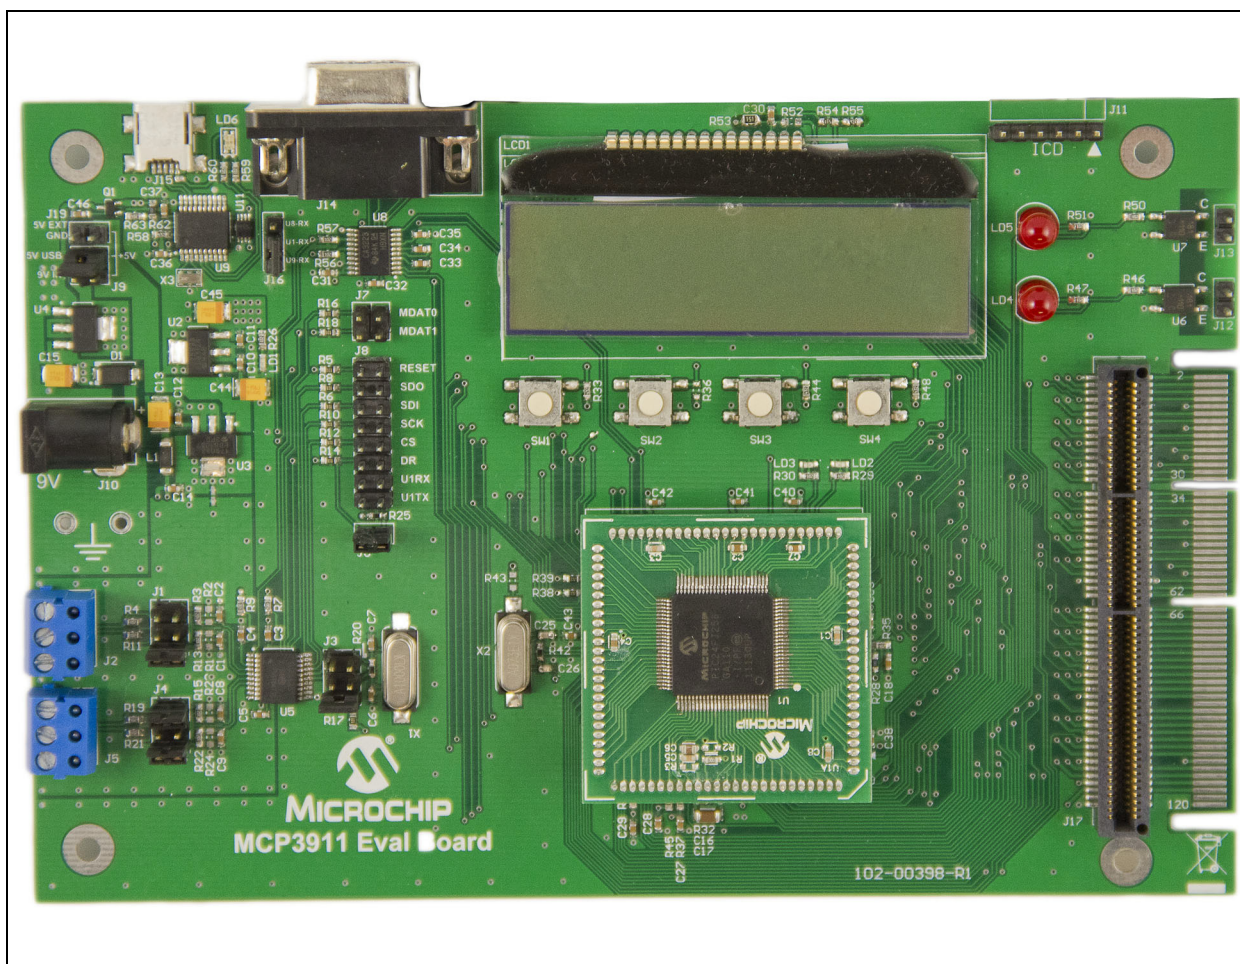


FIGURE 1-1: MCP3911 Evaluation Board.

1.2 PIM MODULE/MCP3911 CONNECTION AND PERIPHERAL USAGE OVERVIEW

The MCP3911 ADC Evaluation Board for 16-Bit MCUs contains a 100-pin PIM socket compatible with Microchip's PIM modules. The system comes with one PIM module, the PIC24FJ128GA110.

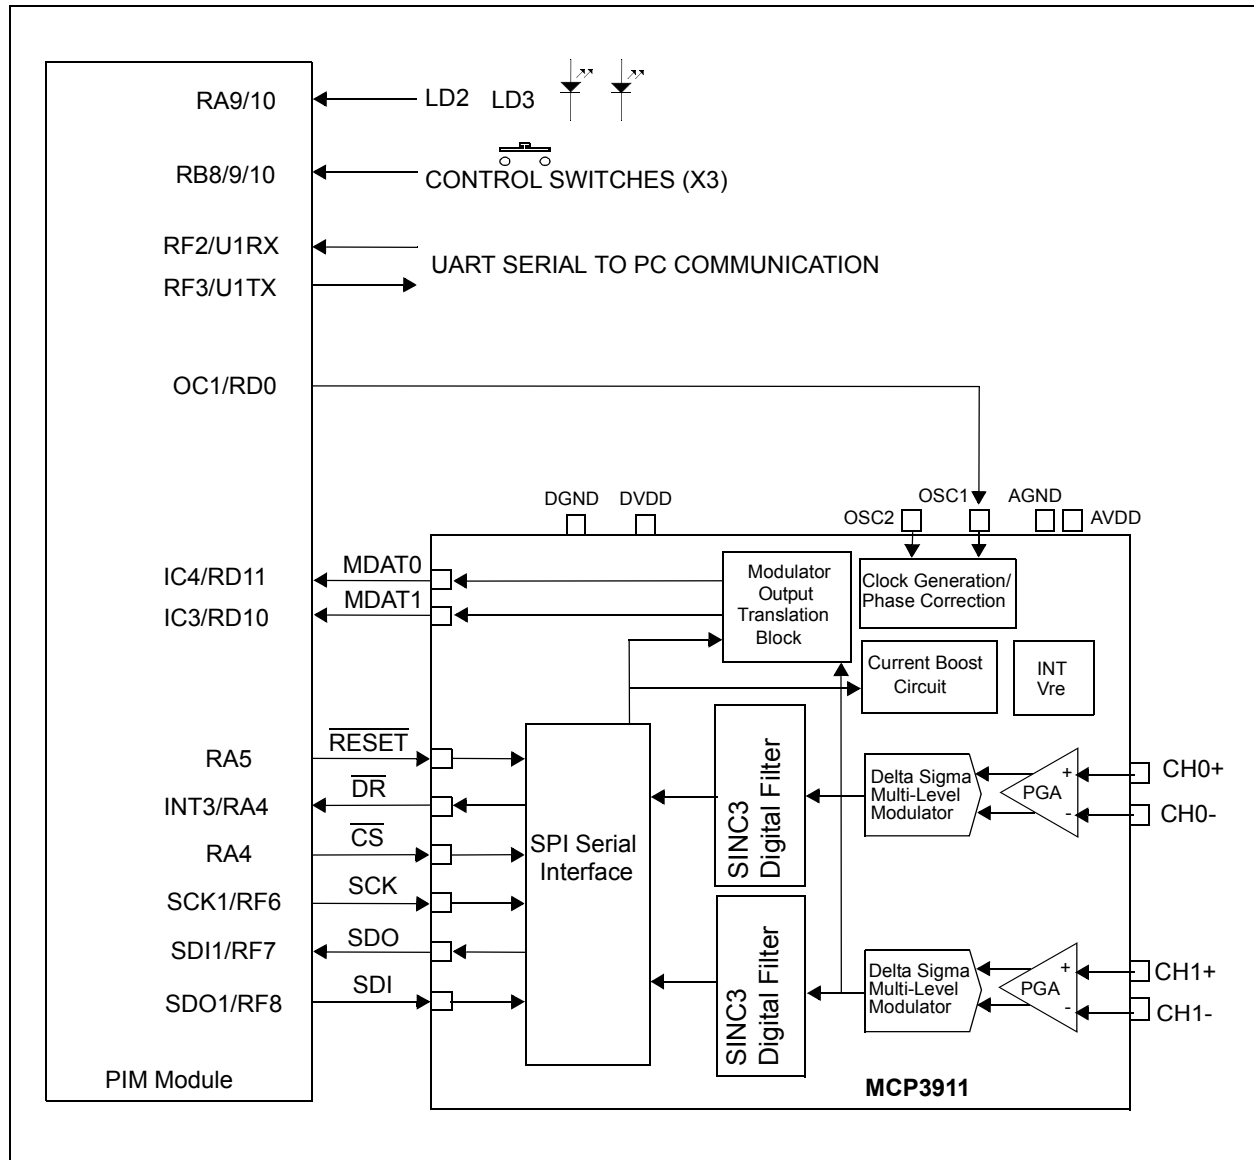


FIGURE 1-2: Digital Connection Overview PIM/MCP3911 Connections.

Ports A, B, and D are used for signals such as push buttons, output LEDs, $\overline{CS}$ and MCLR (for MCP3911 data mode setting). Output Capture 1 is used for clock generation in the MCP3911. Serial communication is achieved through the MSSP module 1.

The MCP3911 device is an ADC with a second order modulator and a third order sinc filter, plus a first order sinc filter used for higher OSR's values. This Delta-Sigma A/D converter has an adjustable oversampling ratio. The CLKIN pin of the MCP3911 is the oversampling clock (MCLK) input. The MCP3911 ADC Evaluation Board for 16-Bit MCUs offers two different options for the MCP3911 master clock (MCLK).

1.2.1 Using the Crystal X1

The MCP3911 ADC Evaluation Board for 16-Bit MCUs is populated with a 3.58 MHz crystal, used as a clock source, by placing jumpers in the following position on the MCP3911 Digital I/O header block:

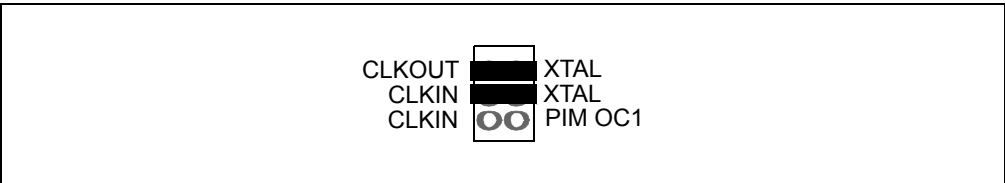


FIGURE 1-3: ADC Clock Selection Jumpers - External Crystal.

1.2.2 Driving the Clock with the PIM Module

The PIC® MCU can be used to generate the CLKIN (MCLK) signal for the MCP3911, setting the ADC sample rate through the use of the output compare module OC1. To use this feature, make the following jumper change to the MCP3911 Digital I/O header block:

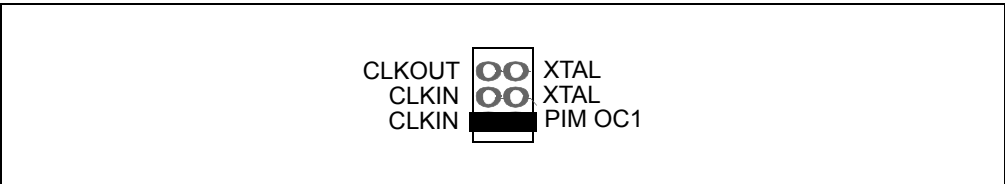


FIGURE 1-4: ADC Clock Selection Jumpers - Clock from MCU.

The frequency of the OC1 output is based on the PR1 bits settings in the firmware.

1.3 ANALOG INPUT STRUCTURE

Two differential input paths allow external signal sources to be easily connected to the MCP3911 input. Screw-terminal connectors J2 and J5 are 3-pin connectors that act as both screw-type and clip-on post connectors.

Note: To use a screw-terminal connector as a post connector, pull up the blue plastic top to access the posts.

The connectors J2 and J5 can be used to force either channel from a differential to single-ended configuration. R4 and R11 (on CH0), and R19 and R21 (on CH1) act as locations for burden resistor connectors for any current transformer inputs.

1.4 UNIVERSAL SERIAL BUS (USB)

The MCP3911 ADC Evaluation Board for 16-Bit MCUs also contains a USB connection for connecting the evaluation board to a PC. On the board, there is an MCP2200 USB to UART converter that creates a virtual COMM port on the PC. The MCP3911 ADC Evaluation Board for 16-Bit MCUs also features a RS232 connector, just in case it is required. The RS232 line driver is connected to the same UART pins of the MCU. For this reason, a 3-pin jumper (J16) is present on the evaluation board to select which serial communication will be used: USB or RS232. The following figure summarizes the connections between the ADC, MCU, USB to serial converter and the RS232 line driver.

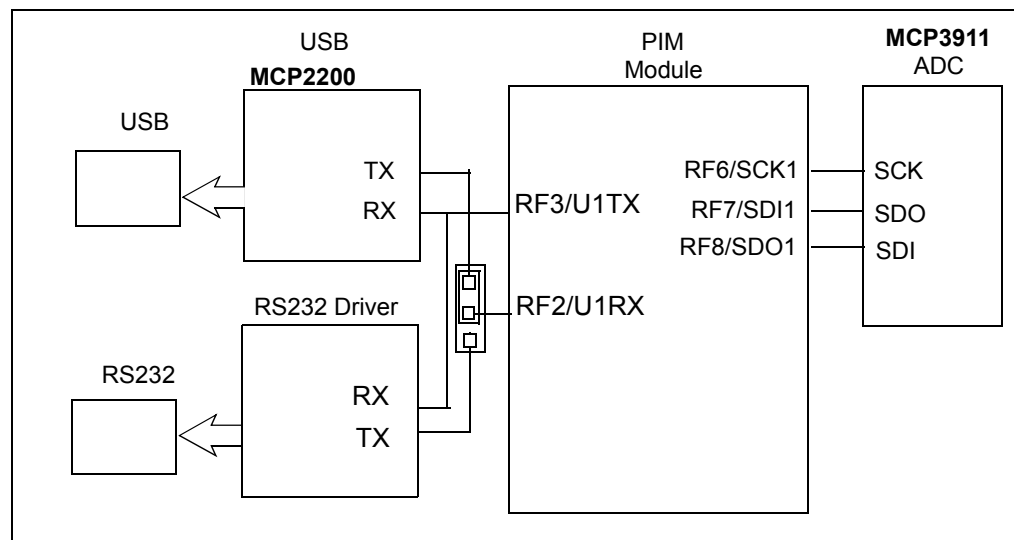


FIGURE 1-5: USB Block Diagram.

The MCP2200 is powered from the USB with 5V. The Q1 transistor (see [Appendix A.](#)) is used to disconnect the board from the PC when it is powered down to avoid power consumption.

Since the PIC24F runs at 3.3V, a level shifter was used to modify the signal level to 5V as required by the MCP2200; this is done with U11 (see [Appendix A.](#)).

The 7.3728 MHz value of the crystal is required to achieve the correct baud rate values for higher speed. This design uses a baud rate of 920.6 kbaud and for this baud rate, the register value is 3 (decimal).

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

NOTES:



MCP3911 ADC EVALUATION BOARD FOR 16-BIT MCUs USER'S GUIDE

Chapter 2. Evaluation Board PC Software

2.1 OVERVIEW

This evaluation board uses the Energy Management Utility software for evaluation of the MCP3911 via a USB connection to the board. A download link for this software can be found on the evaluation board's web page. For instructions on the use of this software, refer to the software's supporting documentation included within the application install package.

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

NOTES:



MCP3911 ADC EVALUATION BOARD FOR 16-BIT MCUs USER'S GUIDE

Appendix A. Schematics and Layouts


A.1 INTRODUCTION

This appendix contains the following schematics of the MCP3911 ADC Evaluation Board for 16-Bit MCUs:


- Schematic - ADC and Power
- Schematic - Microcontroller (MCU)
- Schematic - PIM Module
- Schematic - LCD and UART
- Board - Top Trace and Top Silk
- Board - Bottom Trace and Bottom Silk
- Board - Layer #2 GND
- Board - Layer #3 V_{DD}
- Board - Top Silk and Pads
- Board - Bottom Silk and Pads

MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

A.2 SCHEMATIC - ADC AND POWER

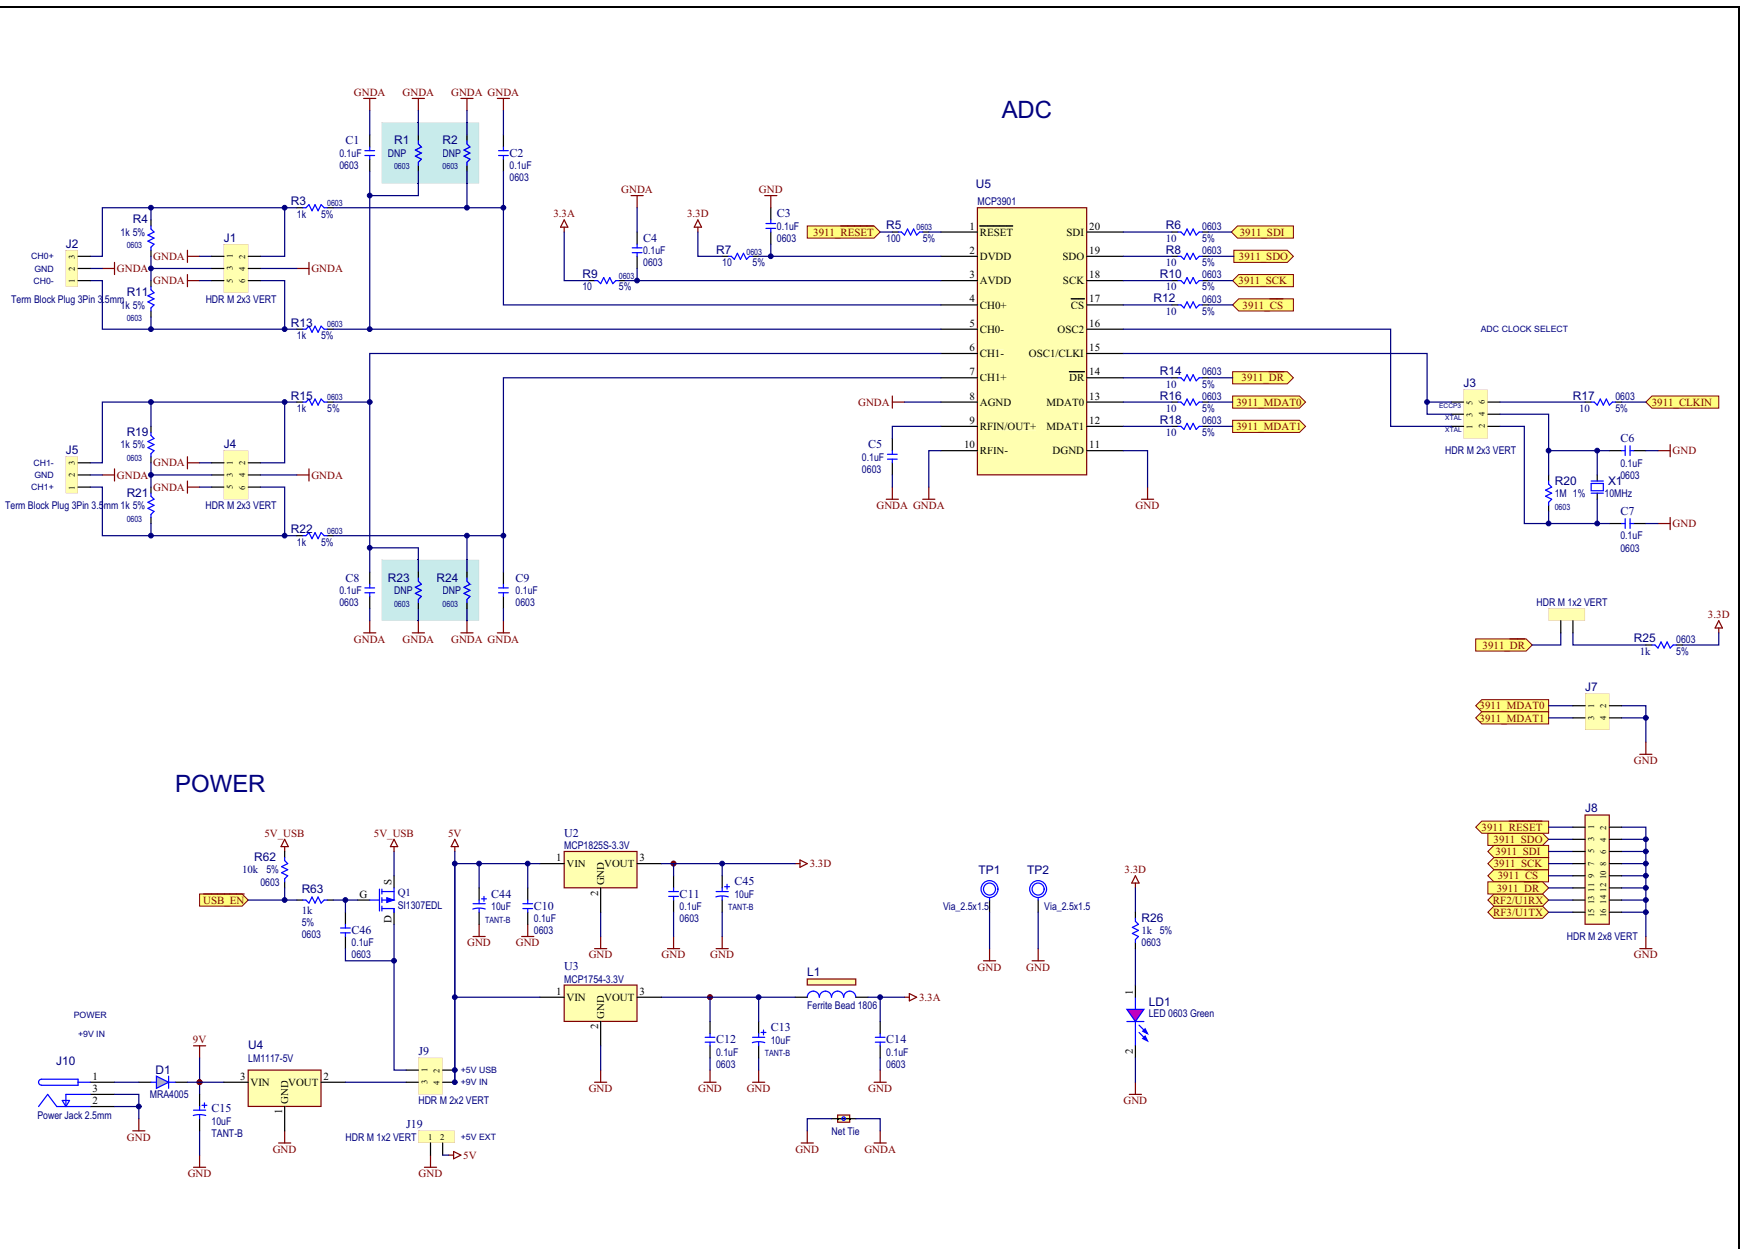


A.3 SCHEMATIC - MICROCONTROLLER (MCU)

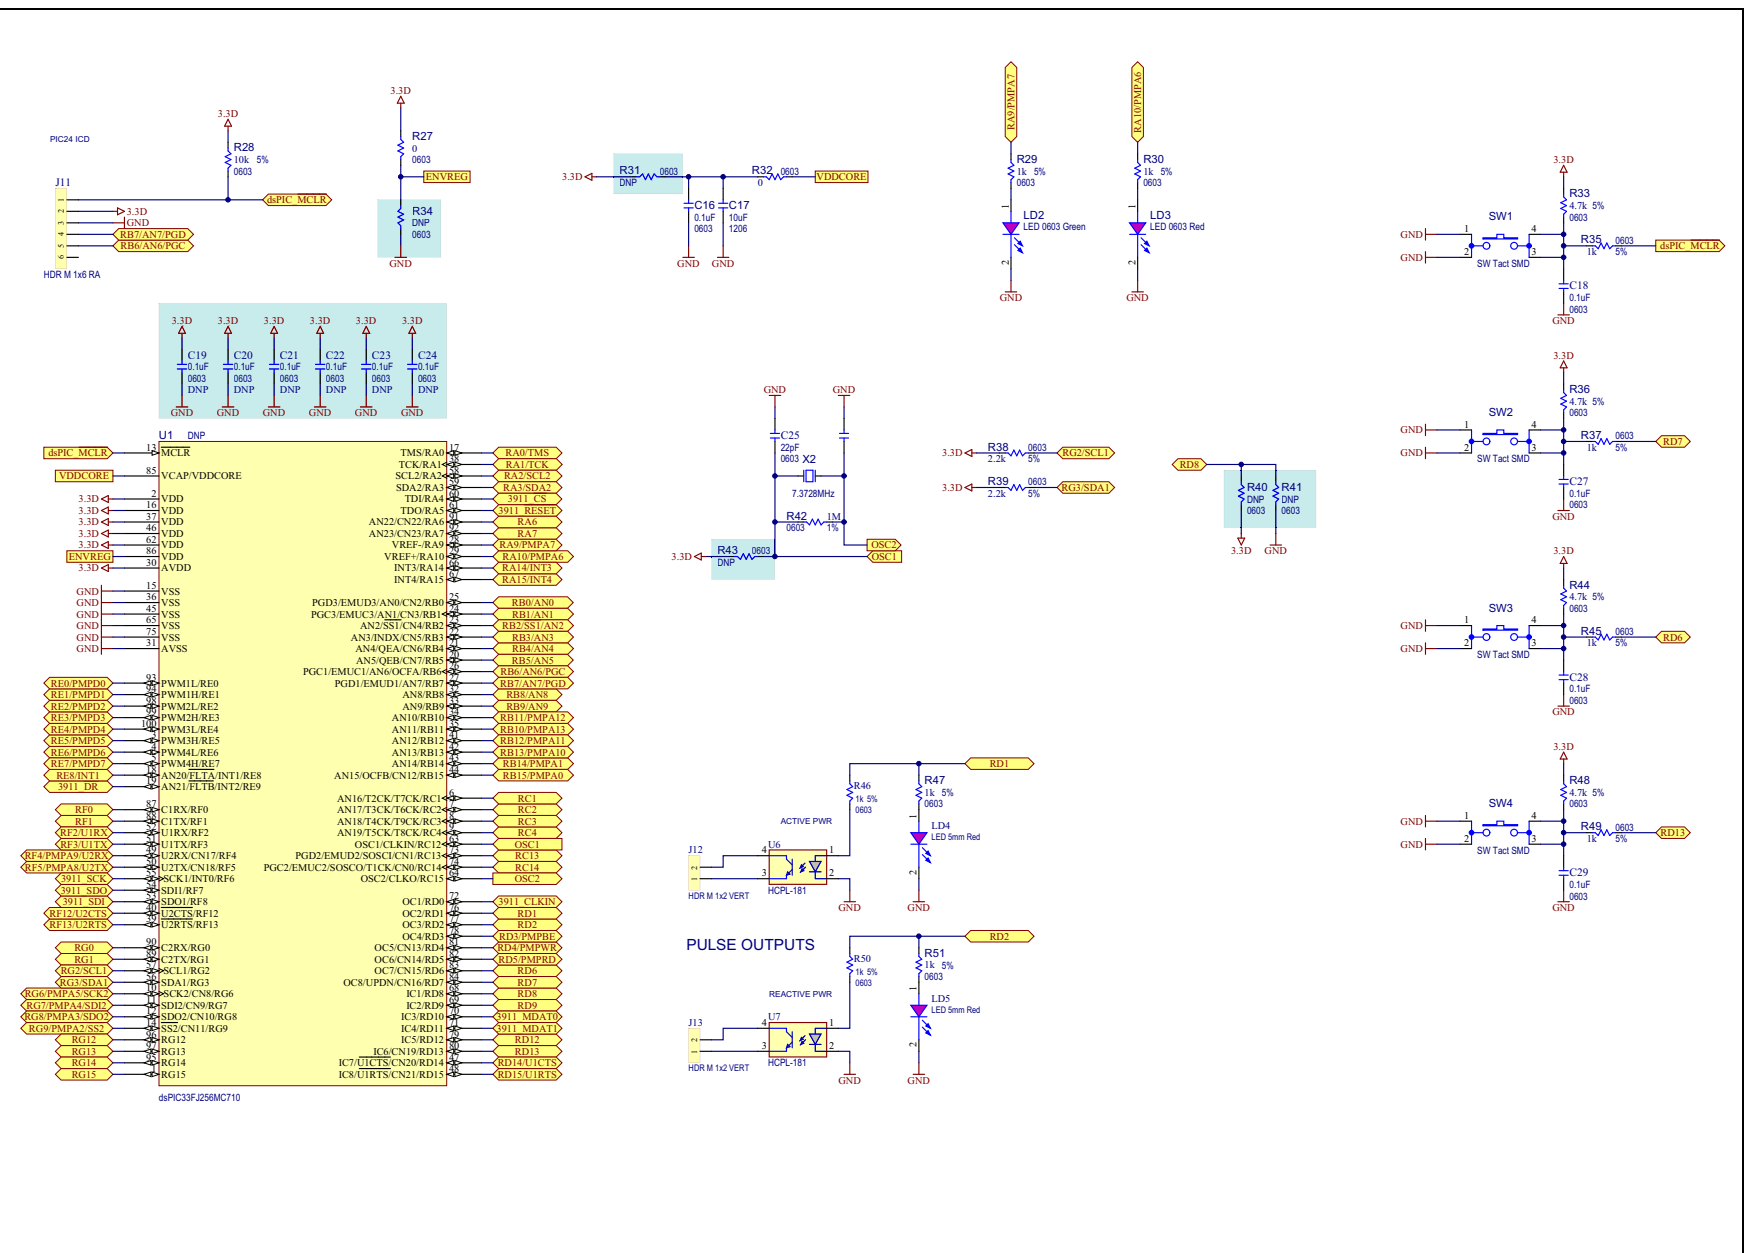




A.5 SCHEMATIC - LCD AND UART

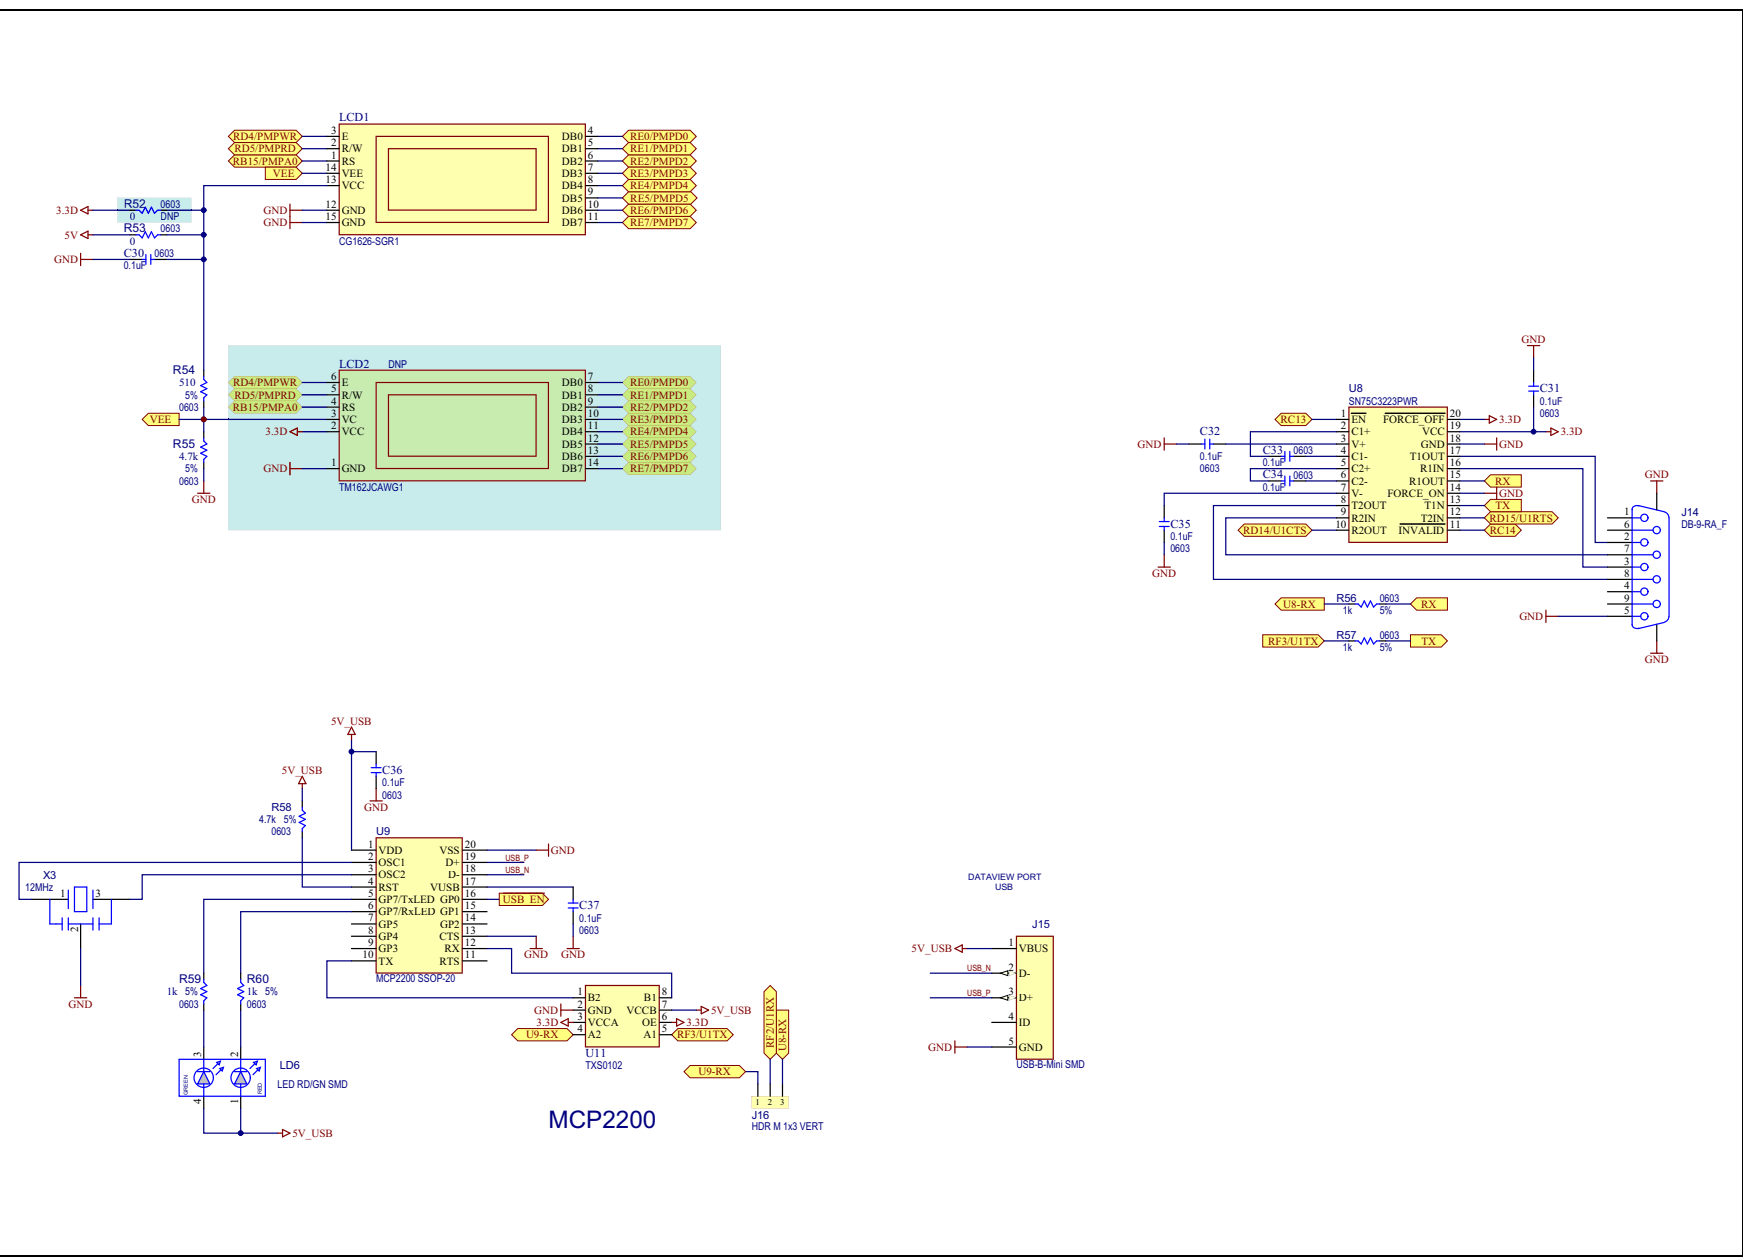


MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide


A.6 BOARD - TOP TRACE AND TOP SILK

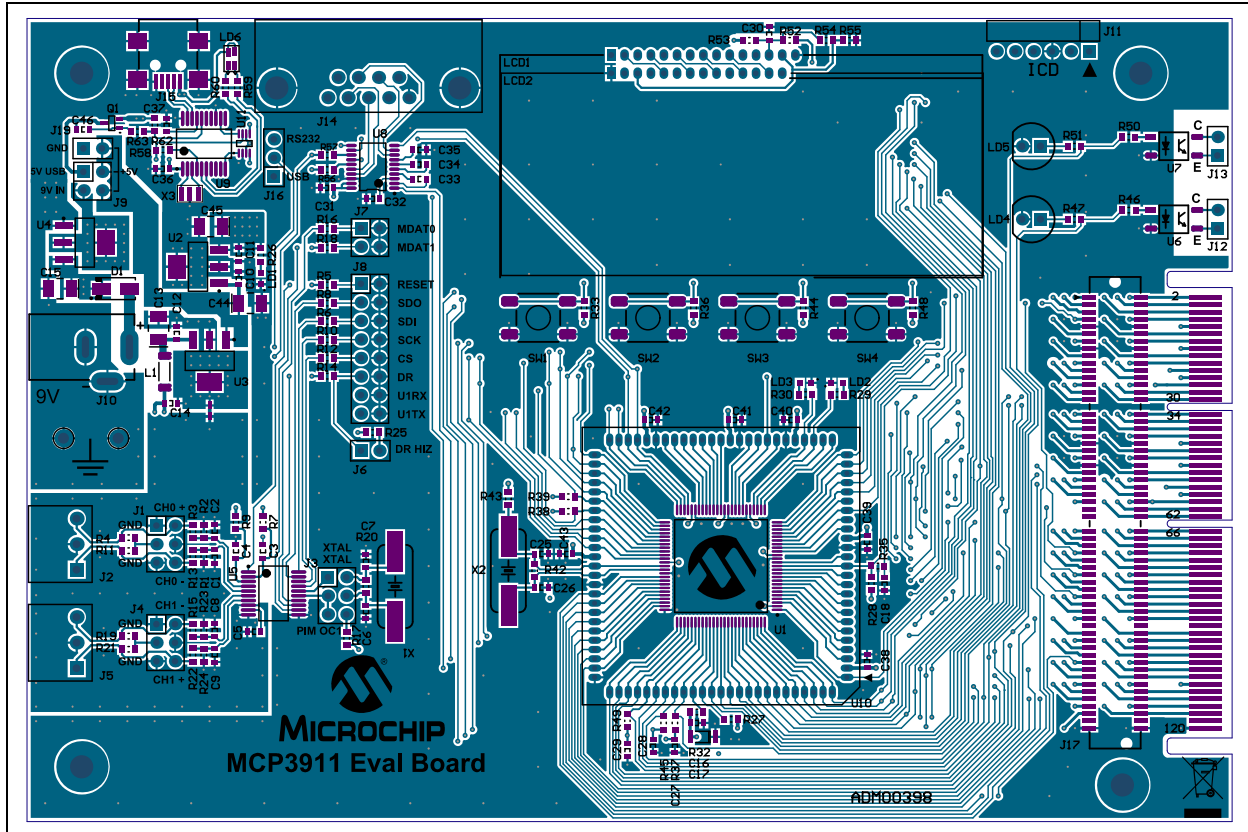


A.7 BOARD - BOTTOM TRACE AND BOTTOM SILK

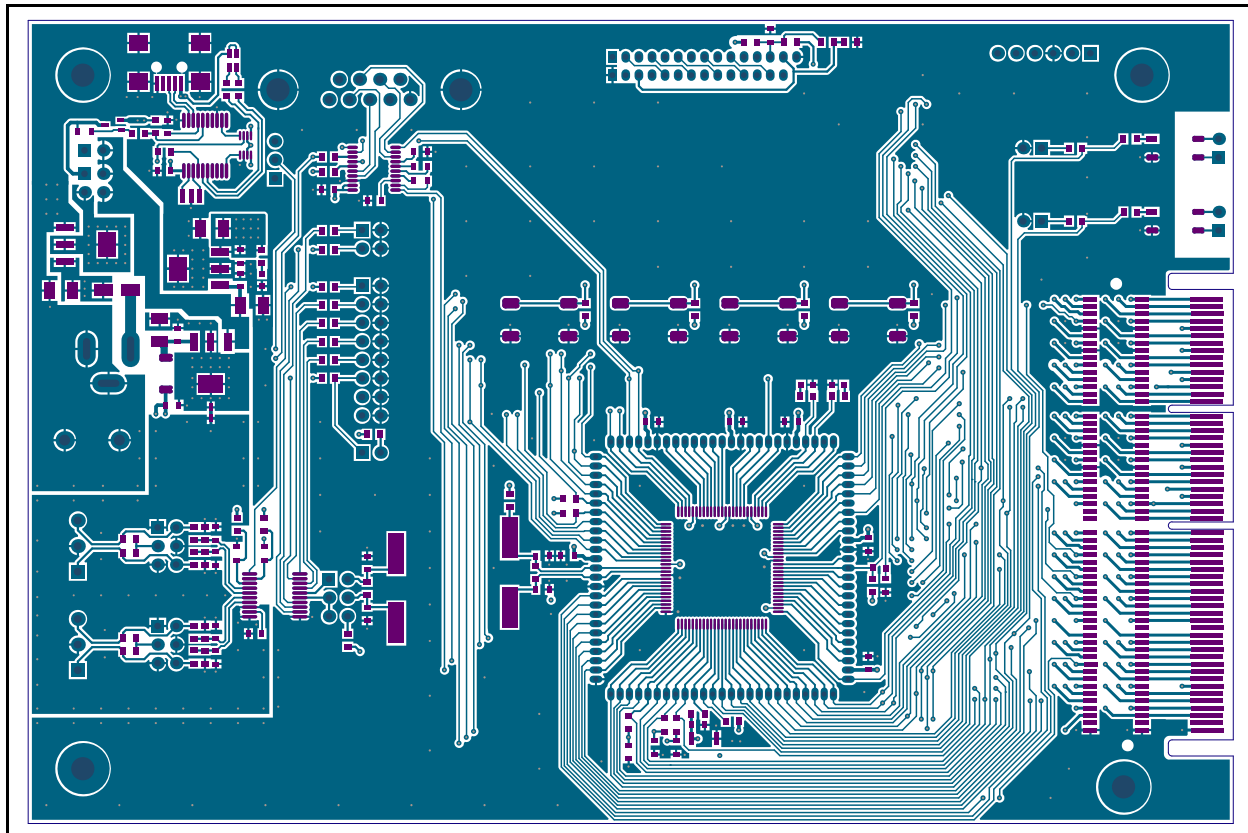

A.8 BOARD - LAYER #2 GND

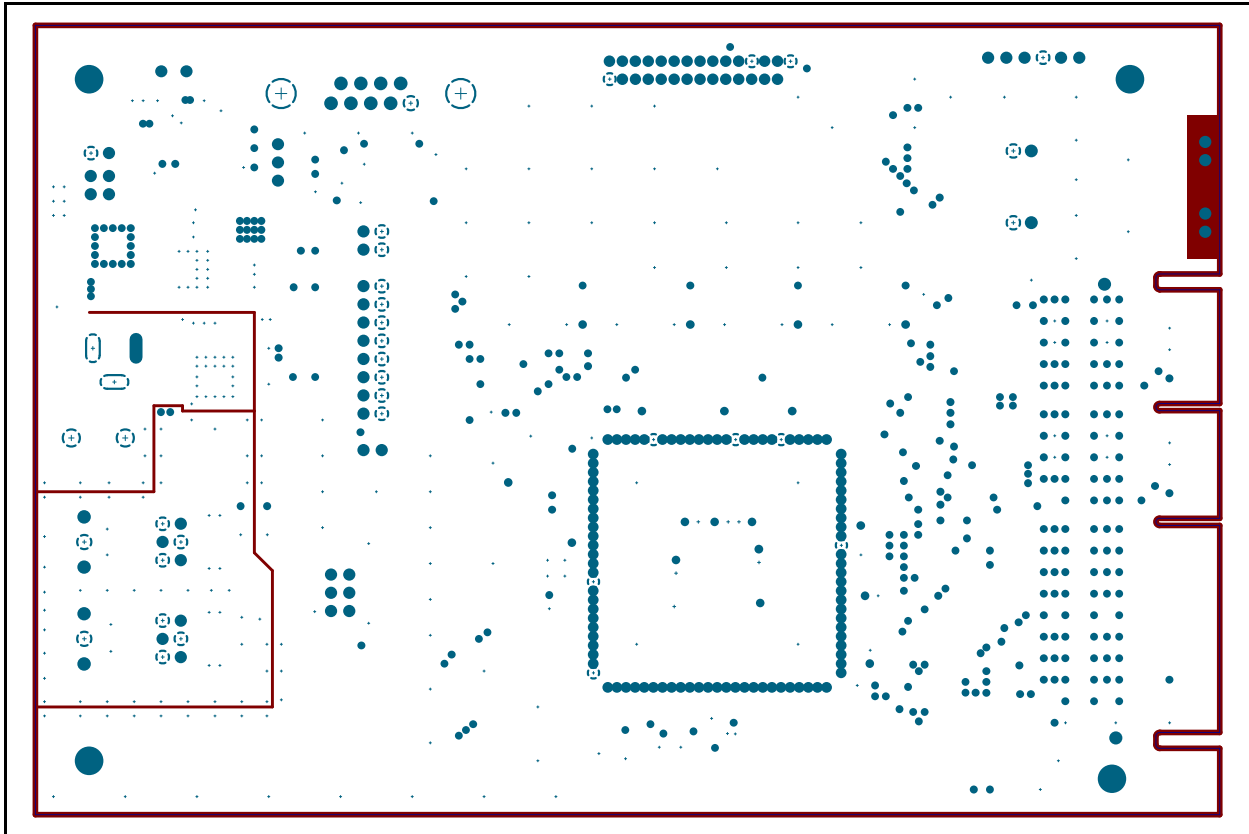


A.9 BOARD - LAYER #3 VDD

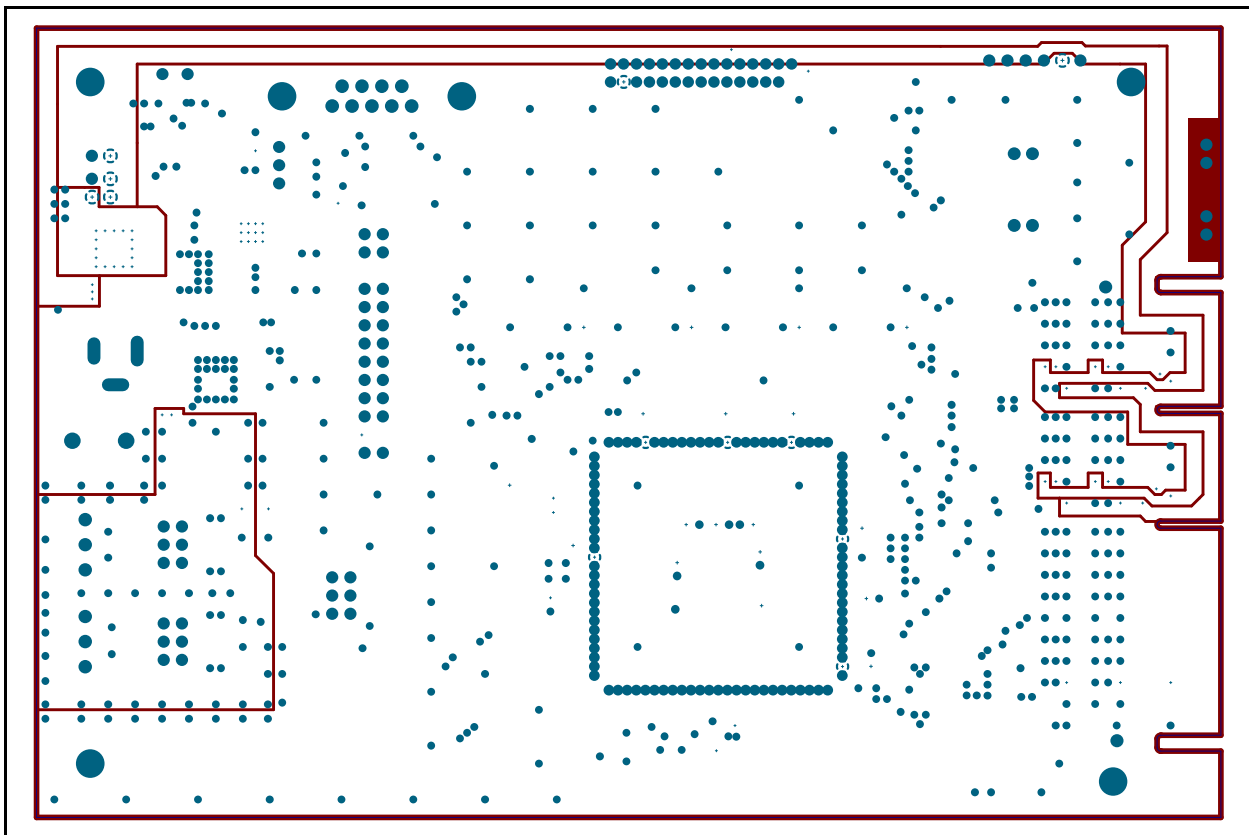


MCP3911 ADC Evaluation Board for 16-Bit MCUs User's Guide

A.10 BOARD - TOP SILK AND PADS

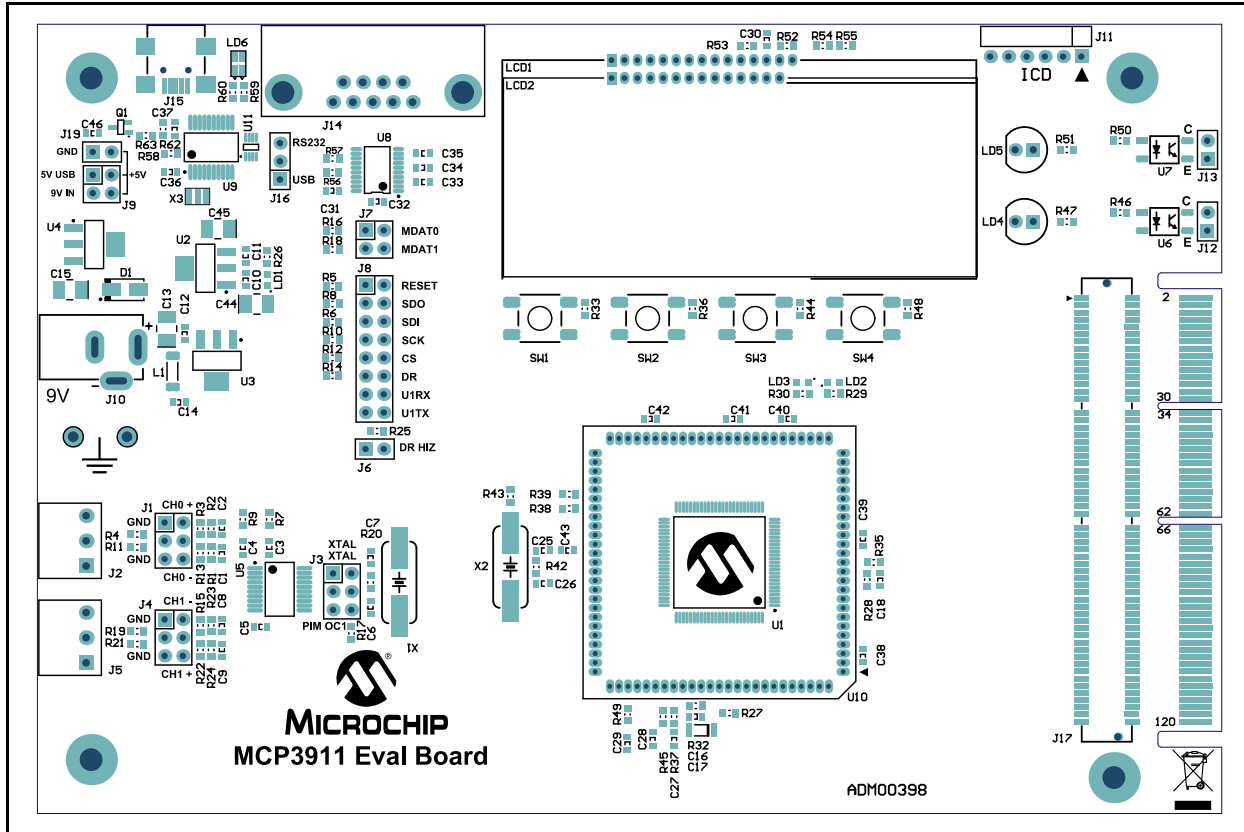

A.11 BOARD - BOTTOM SILK AND PADS

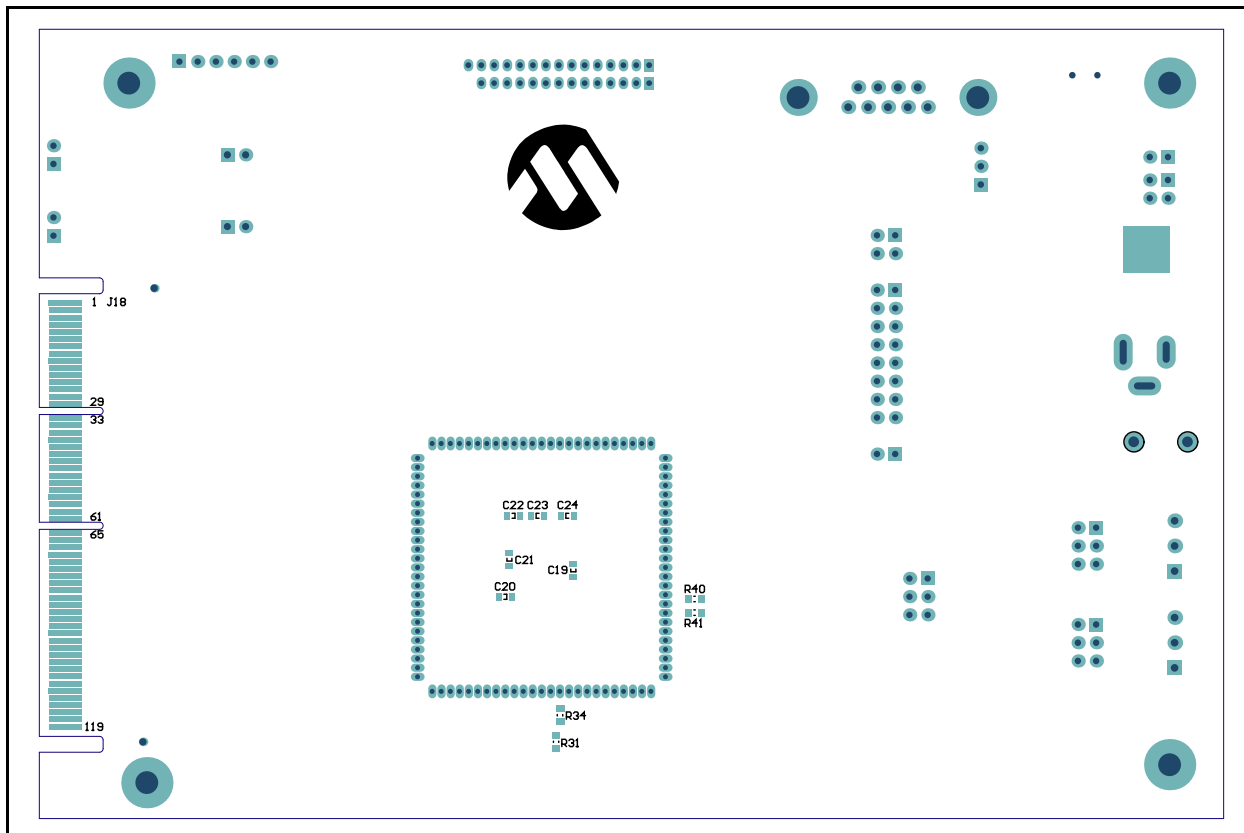

Appendix B. Bill of Materials (BOM)

TABLE B-1: BILL OF MATERIALS (BOM)

Qty	Reference	Description	Manufacturer	Part Number
6	Jumper	Conn. Jumper Shorting .100" Gold	Sullins Connector Solutions	SPC02SVGN-RC
1	L1	Ferrite 300 mA 150 Ohm 1806 SMD	Laird Technologies	LI1806C151R-10
1	LCD1	LCD 16 X 2 Chip on glass reflective	Fema Electronics	CG1626-SGR1
1	LCD2	DO NOT POPULATE - LCD 16 X 2 FTN Reflective No. Blwt. Cog 3V	Tianma Microelectronics	TM162JCAWG1
2	LD1, LD2	LED Smartled Green 570 nm 0603	OSRAM Opto Semiconductors	LG L29K-G2J1-24-Z
1	LD3	LED Smartled 630 nm Red 0603 SMD	OSRAM Opto Semiconductors	LS L29K-G1J2-1-0-2-R18-Z
2	LD4, LD5	LED SS 5 mm 640 nm Red Diff.	Kingbright Corp.	WP7113LSRD
1	LD6	LED 2 X 1.2 mm Red/Green Wtr. Clr. SMD	Kingbright Corp.	APHBM2012SURKCGKC
1	Q1	MOSFET P-Ch G-S 12V SC-70-3	Vishay Siliconix	SI1307EDL-T1-GE3
10	R1, R2, R23, R24, R40, R41, R43, R52, R31, R34	DO NOT POPULATE - Res. 0603 SMD		
2	R20, R42	Res. 1M Ohm 1/10W 1% 0603 SMD	Panasonic - ECG	ERJ-3EKF1004V
2	R27, R32	Res. 0 Ohm 1/10W 0603 SMD	Panasonic - ECG	ERJ-3GEY0R00V
2	R28, R62	Res. 10k Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ103V
25	R3, R4, R11, R13, R15, R19, R21, R22, R25, R26, R29, R30, R35, R37, R45, R46, R47, R49, R50, R51, R56, R57, R59, R60, R63	Res. 1k Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ102V
5	R33, R36, R44, R48, R58	Res. 4.7k Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ472V
2	R38, R39	Res. 2.2k Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ222V
1	R53	Res. 56 Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ560V Digi-Key P56GCT-ND
1	R54	Res. 510 Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ511V Digi-Key P510GCT-ND
9	R5, R6, R8, R10, R12, R14, R16, R17, R18	Res. 100 Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ101V
4	R7, R9, R31, R34	Res. 10 Ohm 1/10W 5% 0603 SMD	Panasonic - ECG	ERJ-3GEYJ100V

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.