



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FEATURES

- 2.8 mm × 5 mm module with integrated optical components
- Red and infrared (IR) LEDs ([ADPD142RI](#))
- Red and green LEDs ([ADPD142RG](#))
- Photodiode
- True dual channel 250 mA LED driver
- Separate LED and AFE settings for each channel
- Dual data registers for each LED return signal
- 14-bit ADC
- 20-bit burst accumulator enabling 20 bits per sample period
- On-board sample to sample accumulator enabling up to 27 bits per data read

APPLICATIONS

- Optical heart rate monitoring (HRM)
- Reflective SpO₂ measurement

GENERAL DESCRIPTION

The [ADPD142RG/ADPD142RI](#) are complete photometric systems designed to stimulate LEDs and measure the corresponding optical return signals. These systems feature best-in-class rejection of ambient light interference, both dc and ac. Each module contains a highly efficient photometric front end, two LEDs, and a photodiode. The front end consists of a control block, a 14-bit analog-to-digital converter (ADC) with 20-bit burst accumulator and two flexible, independently configurable LED drivers. The analog front end (AFE) handles return data from each LED on separate data paths, and with the option of separate AFE settings. The data output and functional configuration occur over a 1.8 V I²C interface. The control circuitry includes flexible LED signaling and synchronous detection.

FUNCTIONAL BLOCK DIAGRAM

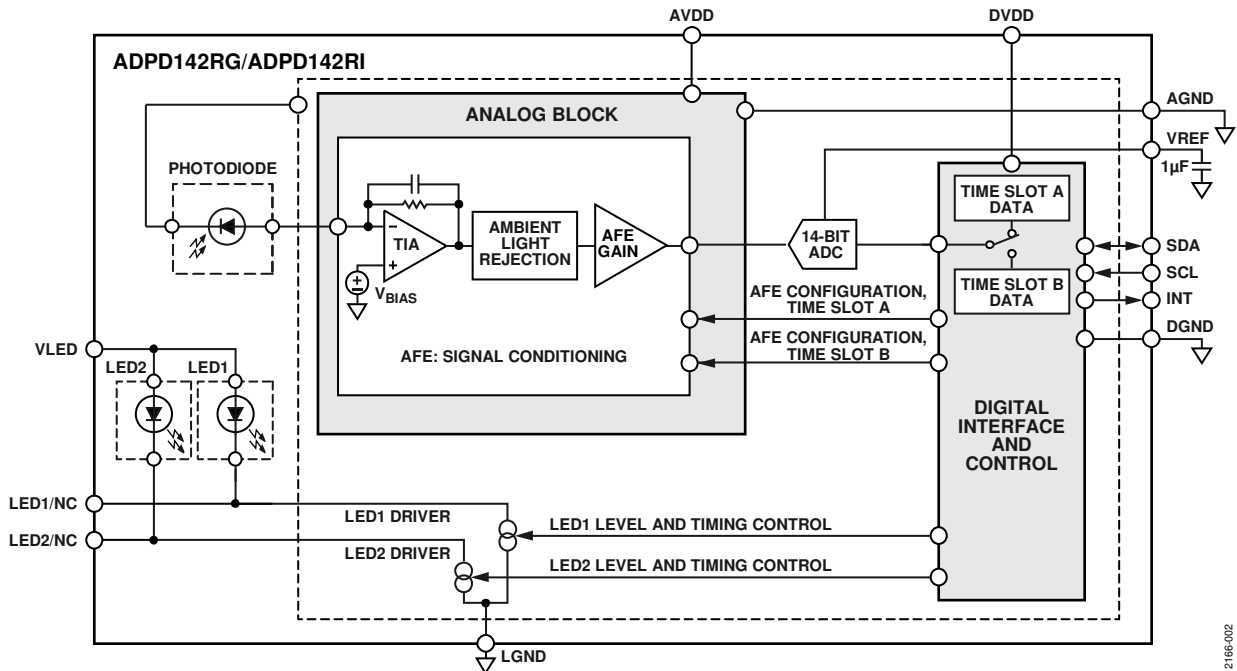


Figure 1.

For more information about the [ADPD142RG/ADPD142RI](#), contact Analog Devices, Inc., at optical_sensors@analog.com.

NOTES