



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### FEATURES

Enhanced system-level ESD performance per IEC 61000-4-x

Low power operation

5 V operation

1.4 mA per channel maximum at 0 Mbps to 2 Mbps

4.3 mA per channel maximum at 10 Mbps

3.3 V operation

0.9 mA per channel maximum at 0 Mbps to 2 Mbps

2.4 mA per channel maximum at 10 Mbps

High common-mode transient immunity: >25 kV/μs

Safety and regulatory approvals (pending)

UL recognition: 2500 V rms for 1 minute per UL 1577

CSA Component Acceptance Notice 5A

VDE certificate of conformity

DIN V VDE V 0884-10 (VDE V 0884-10):2006-12

V<sub>IORM</sub> = 560 V peak

### ENHANCED FEATURES

Supports defense and aerospace applications (AQEC standard)

Military temperature range (–55°C to +125°C)

Controlled manufacturing baseline

One assembly/test site

One fabrication site

Enhanced product change notification

Qualification data available on request

### APPLICATIONS

General-purpose multichannel isolation

SPI/data converter isolation

RS-232/RS-422/RS-485 transceivers

Industrial field bus isolation

### GENERAL DESCRIPTION

The ADuM3400-EP/ADuM3401-EP/ADuM3402-EP<sup>1</sup> are 4-channel digital isolators based on the Analog Devices, Inc., iCoupler® technology. Combining high speed CMOS and monolithic air core transformer technology, these isolation components provide outstanding performance characteristics superior to alternatives such as optocoupler devices.

The ADuM3400-EP/ADuM3401-EP/ADuM3402-EP isolators provide four independent isolation channels in a variety of channel configurations and data rates (see the Ordering Guide). All models operate with the supply voltage on either side ranging from 3.135 V to 5.5 V, providing compatibility with lower voltage systems as well as enabling a voltage translation functionality across the isolation barrier.

<sup>1</sup> Protected by US Patents 5,952,849; 6,873,065; 6,903,578; and 7,075,329.

Rev. 0 [Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

### FUNCTIONAL BLOCK DIAGRAMS

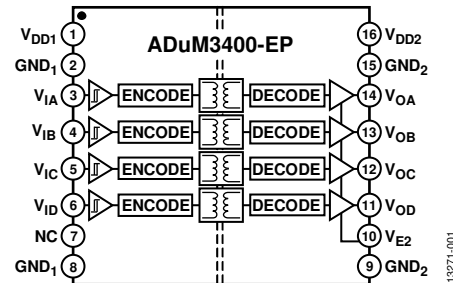


Figure 1. ADuM3400-EP Functional Block Diagram

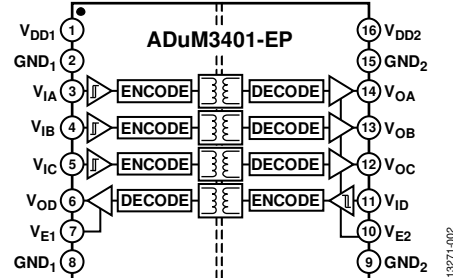


Figure 2. ADuM3401-EP Functional Block Diagram

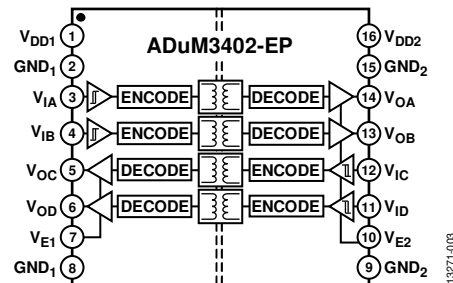


Figure 3. ADuM3402-EP Functional Block Diagram

The ADuM3400-EP/ADuM3401-EP/ADuM3402-EP isolators have a patented refresh feature that ensures dc correctness in the absence of input logic transitions and during power-up/power-down conditions.

The ADuM3400-EP/ADuM3401-EP/ADuM3402-EP isolators contain various circuit and layout changes to provide increased capability relative to system-level IEC 61000-4-x testing (ESD/burst/surge). The precise capability in these tests is determined by the design and layout of the user's board or module. For more information, see the [AN-793 Application Note, ESD/Latch-Up Considerations with iCoupler Isolation Products](#).

Additional application and technical information can be found in the [ADuM3400/ADuM3401/ADuM3402](#) data sheet.

## TABLE OF CONTENTS

Features .....	1	Regulatory Information.....	9
Enhanced Features.....	1	Insulation and Safety-Related Specifications.....	9
Applications.....	1	DIN V VDE V 0884-10 (VDE V 0884-10) Insulation Characteristics .....	10
General Description .....	1	Recommended Operating Conditions .....	10
Functional Block Diagrams.....	1	Absolute Maximum Ratings .....	11
Revision History .....	2	ESD Caution.....	11
Specifications.....	3	Pin Configurations and Function Descriptions .....	12
Electrical Characteristics—5 V Operation.....	3	Typical Performance Characteristics .....	15
Electrical Characteristics—3.3 V Operation .....	4	Outline Dimensions .....	17
Electrical Characteristics—Mixed 5 V/3.3 V or 3.3 V/5 V Operation.....	6	Ordering Guide .....	17
Package Characteristics .....	9		

## REVISION HISTORY

7/15—Revision 0: Initial Version



## SPECIFICATIONS

## ELECTRICAL CHARACTERISTICS—5 V OPERATION

All voltages are relative to their respective ground.  $4.5\text{ V} \leq V_{DD1} \leq 5.5\text{ V}$  and  $4.5\text{ V} \leq V_{DD2} \leq 5.5\text{ V}$ . All minimum/maximum specifications apply over the entire recommended operation range, unless otherwise noted. All typical specifications are at  $T_A = 25^\circ\text{C}$ ,  $V_{DD1} = V_{DD2} = 5\text{ V}$ .

Table 1.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
<b>DC SPECIFICATIONS</b>						
Input Supply Current per Channel, Quiescent	$I_{DD1(Q)}$		0.57	0.83	mA	
Output Supply Current per Channel, Quiescent	$I_{DDO(Q)}$		0.29	0.35	mA	
<b>ADuM3400-EP, Total Supply Current<sup>1</sup></b>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$		2.9	3.5	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$		1.2	1.9	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(10)}$		9.0	11.6	mA	5 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(10)}$		3.0	5.5	mA	5 MHz logic signal frequency
<b>ADuM3401-EP, Total Supply Current<sup>1</sup></b>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$		2.5	3.2	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$		1.6	2.4	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(10)}$		7.4	10.6	mA	5 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(10)}$		4.4	6.5	mA	5 MHz logic signal frequency
<b>ADuM3402-EP, Total Supply Current<sup>1</sup></b>						
DC to 2 Mbps						
$V_{DD1}$ or $V_{DD2}$ Supply Current	$I_{DD1(Q)}, I_{DD2(Q)}$		2.0	2.8	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ or $V_{DD2}$ Supply Current	$I_{DD1(10)}, I_{DD2(10)}$		6.0	7.5	mA	5 MHz logic signal frequency
<b>For All Models</b>						
Input Leakage per Channel	$I_I$	-10	+0.01	+10	$\mu\text{A}$	$0\text{ V} \leq V_{IX} \leq V_{DDX}$
$V_{EX}$ Input Pull-Up Current	$I_{PU}$	-10	-3			$V_{EX} = 0\text{ V}$
Tristate Leakage Current per Channel	$I_{OZ}$	-10	+0.01	+10	$\mu\text{A}$	
Logic High Input Threshold	$V_{IH}, V_{EH}$	2.0			V	
Logic Low Input Threshold	$V_{IL}, V_{EL}$			0.8	V	
Logic High Output Voltages	$V_{OAH}, V_{OBH}$	$(V_{DD1} \text{ or } V_{DD2}) - 0.1$	5.0		V	$I_{OX}^2 = -20\text{ }\mu\text{A}, V_{IX} = V_{IXH}^3$
	$V_{OCH}, V_{ODH}$	$(V_{DD1} \text{ or } V_{DD2}) - 0.4$	4.8		V	$I_{OX}^2 = -4\text{ mA}, V_{IX} = V_{IXH}^3$
Logic Low Output Voltages	$V_{OAL}, V_{OBL}$		0.0	0.1	V	$I_{OX}^2 = 20\text{ }\mu\text{A}, V_{IX} = V_{IXL}^4$
	$V_{OCL}, V_{ODL}$		0.04	0.1	V	$I_{OX}^2 = 400\text{ }\mu\text{A}, V_{IX} = V_{IXL}^4$
			0.2	0.4	V	$I_{OX}^2 = 4\text{ mA}, V_{IX} = V_{IXL}^4$
<b>SWITCHING SPECIFICATIONS</b>						
Minimum Pulse Width	PW			100	ns	$C_L = 15\text{ pF}$ , CMOS signal levels
Maximum Data Rate		10			Mbps	$C_L = 15\text{ pF}$ , CMOS signal levels
Propagation Delay	$t_{PHL}, t_{PLH}$	20	32	50	ns	$C_L = 15\text{ pF}$ , CMOS signal levels
Pulse Width Distortion, $ t_{PLH} - t_{PHL} $	PWD			3	ns	$C_L = 15\text{ pF}$ , CMOS signal levels
Change vs. Temperature			5		ps/ $^\circ\text{C}$	$C_L = 15\text{ pF}$ , CMOS signal levels
Propagation Delay Skew	$t_{PSK}$			15	ns	$C_L = 15\text{ pF}$ , CMOS signal levels
<b>Channel to Channel Matching</b>						
Codirectional Channels	$t_{PSKCD}$			3	ns	$C_L = 15\text{ pF}$ , CMOS signal levels
Opposing Directional Channels	$t_{PSKOD}$			6	ns	$C_L = 15\text{ pF}$ , CMOS signal levels

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
For All Models						
Output Propagation Delay						
Disable (High/Low to High Impedance)	$t_{PHZ}, t_{PLH}$		6	8	ns	$C_L = 15$ pF, CMOS signal levels
Enable (High Impedance to High/Low)	$t_{PZH}, t_{PZL}$		6	8	ns	$C_L = 15$ pF, CMOS signal levels
Output Rise/Fall Time (10% to 90%)	$t_R/t_F$		2.5		ns	$C_L = 15$ pF, CMOS signal levels
Common-Mode Transient Immunity						
Logic High Output <sup>5</sup>	$ CM_H $	25	35		kV/ $\mu$ s	$V_{IX} = V_{DD1}/V_{DD2}, V_{CM} = 1000$ V, transient magnitude = 800 V
Logic Low Output <sup>5</sup>	$ CM_L $	25	35		kV/ $\mu$ s	$V_{IX} = 0$ V, $V_{CM} = 1000$ V, transient magnitude = 800 V
Refresh Rate	$f_r$		1.2		Mbps	
Dynamic Supply Current per Channel <sup>6</sup>						
Input	$I_{DDI(D)}$		0.20		mA/Mbps	
Output	$I_{DDO(D)}$		0.05		mA/Mbps	

<sup>1</sup> The supply current values for all four channels are combined when running at identical data rates. Output supply current values are specified with no output load present. See Figure 8 through Figure 10 for information on per-channel supply current as a function of data rate for unloaded and loaded conditions. See Figure 11 through Figure 15 for total  $V_{DD1}$  and  $V_{DD2}$  supply currents as a function of data rate for ADuM3400-EP/ADuM3401-EP/ADuM3402-EP channel configurations.

<sup>2</sup>  $I_{OX}$  is the Channel x output current, where x = A, B, C, or D.

<sup>3</sup>  $V_{IKH}$  is the input side logic high.

<sup>4</sup>  $V_{IKL}$  is the input side logic low.

<sup>5</sup>  $CM_H$  is the maximum common-mode voltage slew rate that can be sustained while maintaining the output voltage ( $V_{OUT}$ ) > 0.8  $V_{DD2}$ .  $CM_L$  is the maximum common-mode voltage slew rate that can be sustained while maintaining  $V_{OUT} < 0.8$  V. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges. The transient magnitude is the range over which the common mode is slewed.

<sup>6</sup> Dynamic supply current is the incremental amount of supply current required for a 1 Mbps increase in signal data rate. See Figure 8 through Figure 10 for information on per-channel supply current for unloaded and loaded conditions.

### ELECTRICAL CHARACTERISTICS—3.3 V OPERATION

All voltages are relative to their respective ground.  $3.135$  V  $\leq V_{DD1} \leq 3.6$  V and  $3.135$  V  $\leq V_{DD2} \leq 3.6$  V. All minimum/maximum specifications apply over the entire recommended operation range, unless otherwise noted. All typical specifications are at  $T_A = 25^\circ$ C,  $V_{DD1} = V_{DD2} = 3.3$  V.

Table 2.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
DC SPECIFICATIONS						
Input Supply Current per Channel, Quiescent	$I_{DDI(Q)}$		0.31	0.49	mA	
Output Supply Current per Channel, Quiescent	$I_{DDO(Q)}$		0.19	0.27	mA	
ADuM3400-EP, Total Supply Current <sup>1</sup>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$		1.6	2.1	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$		0.7	1.2	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(10)}$		4.8	7.1	mA	5 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(10)}$		1.8	2.3	mA	5 MHz logic signal frequency
ADuM3401-EP, Total Supply Current <sup>1</sup>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$		1.4	1.9	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$		0.9	1.5	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(10)}$		4.1	5.6	mA	5 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(10)}$		2.5	3.3	mA	5 MHz logic signal frequency
ADuM3402-EP, Total Supply Current <sup>1</sup>						
DC to 2 Mbps						
$V_{DD1}$ or $V_{DD2}$ Supply Current	$I_{DD1(Q)}, I_{DD2(Q)}$		1.2	1.7	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ or $V_{DD2}$ Supply Current	$I_{DD1(10)}, I_{DD2(10)}$		3.3	4.4	mA	5 MHz logic signal frequency

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
For All Models						
Input Leakage per Channel	$I_I$	-10	+0.01	+10	$\mu\text{A}$	$0\text{V} \leq V_{ix} \leq V_{DDx}$
$V_{Ex}$ Input Pull-Up Current	$I_{PU}$	-10	-3			$V_{Ex} = 0\text{V}$
Tristate Leakage Current per Channel	$I_{OZ}$	-10	+0.01	+10	$\mu\text{A}$	
Logic High Input Threshold	$V_{IH}, V_{EH}$	1.6			V	
Logic Low Input Threshold	$V_{IL}, V_{EL}$			0.4	V	
Logic High Output Voltages	$V_{OAH}, V_{OBH}$	$(V_{DD1} \text{ or } V_{DD2}) - 0.1$	3.3		V	$I_{Ox}^2 = -20\ \mu\text{A}, V_{ix} = V_{ixH}^3$
	$V_{OCH}, V_{ODH}$	$(V_{DD1} \text{ or } V_{DD2}) - 0.4$	2.8		V	$I_{Ox}^2 = -4\ \text{mA}, V_{ix} = V_{ixH}^3$
Logic Low Output Voltages	$V_{OAL}, V_{OBL}$		0.0	0.1	V	$I_{Ox}^2 = 20\ \mu\text{A}, V_{ix} = V_{ixL}^4$
	$V_{OCL}, V_{ODL}$		0.04	0.1	V	$I_{Ox}^2 = 400\ \mu\text{A}, V_{ix} = V_{ixL}^4$
			0.2	0.4	V	$I_{Ox}^2 = 4\ \text{mA}, V_{ix} = V_{ixL}^4$
SWITCHING SPECIFICATIONS						
Minimum Pulse Width	PW			100	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Maximum Data Rate		10			Mbps	$C_L = 15\ \text{pF}$ , CMOS signal levels
Propagation Delay	$t_{PHL}, t_{PLH}$	20	38	50	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Pulse Width Distortion, $ t_{PLH} - t_{PHL} $	PWD			3	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Change vs. Temperature			5		ps/ $^{\circ}\text{C}$	$C_L = 15\ \text{pF}$ , CMOS signal levels
Propagation Delay Skew	$t_{PSK}$			22	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Channel to Channel Matching						
Codirectional Channels	$t_{PSKCD}$			3	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Opposing Directional Channels	$t_{PSKOD}$			6	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
For All Models						
Output Propagation Delay						
Disable (High/Low to High Impedance)	$t_{PHZ}, t_{PLH}$		6	8	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Enable (High Impedance to High/Low)	$t_{PZH}, t_{PZL}$		6	8	ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Output Rise/Fall Time (10% to 90%)	$t_R/t_F$		3		ns	$C_L = 15\ \text{pF}$ , CMOS signal levels
Common-Mode Transient Immunity <sup>5</sup>						
Logic High Output	$ CM_H $	25	35		kV/ $\mu\text{s}$	$V_{ix} = V_{DD1}/V_{DD2}, V_{CM} = 1000\ \text{V}$ , transient magnitude = 800 V
Logic Low Output	$ CM_L $	25	35		kV/ $\mu\text{s}$	$V_{ix} = 0\ \text{V}, V_{CM} = 1000\ \text{V}$ , transient magnitude = 800 V
Refresh Rate	$f_r$		1.1		Mbps	
Dynamic Supply Current per Channel <sup>6</sup>						
Input	$I_{DDI(D)}$		0.10		mA/Mbps	
Output	$I_{DDO(D)}$		0.03		mA/Mbps	

<sup>1</sup> The supply current values for all four channels are combined when running at identical data rates. Output supply current values are specified with no output load present. See Figure 8 through Figure 10 for information on per-channel supply current as a function of data rate for unloaded and loaded conditions. See Figure 11 through Figure 15 for total  $V_{DD1}$  and  $V_{DD2}$  supply currents as a function of data rate for ADuM3400-EP/ADuM3401-EP/ADuM3402-EP channel configurations.

<sup>2</sup>  $I_{Ox}$  is the Channel x output current, where x = A, B, C, or D.

<sup>3</sup>  $V_{ixH}$  is the input side logic high.

<sup>4</sup>  $V_{ixL}$  is the input side logic low.

<sup>5</sup>  $CM_H$  is the maximum common-mode voltage slew rate that can be sustained while maintaining  $V_{OUT} > 0.8 V_{DD2}$ .  $CM_L$  is the maximum common-mode voltage slew rate that can be sustained while maintaining  $V_{OUT} < 0.8 V$ . The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges. The transient magnitude is the range over which the common mode is slewed.

<sup>6</sup> Dynamic supply current is the incremental amount of supply current required for a 1 Mbps increase in signal data rate. See Figure 8 through Figure 10 for information on per channel supply current for unloaded and loaded conditions.

**ELECTRICAL CHARACTERISTICS—MIXED 5 V/3.3 V OR 3.3 V/5 V OPERATION**

All voltages are relative to their respective ground. For 5 V/3.3 V operation,  $4.5\text{ V} \leq V_{DD1} \leq 5.5\text{ V}$  and  $3.135\text{ V} \leq V_{DD2} \leq 3.6\text{ V}$ , and for 3.3 V/5 V operation,  $3.135\text{ V} \leq V_{DD1} \leq 3.6\text{ V}$  and  $4.5\text{ V} \leq V_{DD2} \leq 5.5\text{ V}$ . All minimum/maximum specifications apply over the entire recommended operation range, unless otherwise noted. All typical specifications are at  $T_A = 25^\circ\text{C}$ ;  $V_{DD1} = 3.3\text{ V}$ ,  $V_{DD2} = 5\text{ V}$  or  $V_{DD1} = 5\text{ V}$ ,  $V_{DD2} = 3.3\text{ V}$ .

**Table 3.**

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
<b>DC SPECIFICATIONS</b>						
Input Supply Current per Channel, Quiescent	$I_{DD1(Q)}$					
5 V/3.3 V Operation			0.57	0.83	mA	
3.3 V/5 V Operation			0.31	0.49	mA	
Output Supply Current per Channel, Quiescent	$I_{DD0(Q)}$					
5 V/3.3 V Operation			0.29	0.27	mA	
3.3 V/5 V Operation			0.19	0.35	mA	
<b>ADuM3400-EP, Total Supply Current<sup>1</sup></b>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$					
5 V/3.3 V Operation			2.9	3.5	mA	DC to 1 MHz logic signal frequency
3.3 V/5 V Operation			1.6	2.1	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$					
5 V/3.3 V Operation			0.7	1.2	mA	DC to 1 MHz logic signal frequency
3.3 V/5 V Operation			1.2	1.9	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(10)}$					
5 V/3.3 V Operation			9.0	11.6	mA	5 MHz logic signal frequency
3.3 V/5 V Operation			4.8	7.1	mA	5 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(10)}$					
5 V/3.3 V Operation			1.8	2.3	mA	5 MHz logic signal frequency
3.3 V/5 V Operation			3.0	5.5	mA	5 MHz logic signal frequency
<b>ADuM3401-EP, Total Supply Current<sup>1</sup></b>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$					
5 V/3.3 V Operation			2.5	3.2	mA	DC to 1 MHz logic signal frequency
3.3 V/5 V Operation			1.4	1.9	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$					
5 V/3.3 V Operation			0.9	1.5	mA	DC to 1 MHz logic signal frequency
3.3 V/5 V Operation			1.6	2.4	mA	DC to 1 MHz logic signal frequency
10 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(10)}$					
5 V/3.3 V Operation			7.4	10.6	mA	5 MHz logic signal frequency
3.3 V/5 V Operation			4.1	5.6	mA	5 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(10)}$					
5 V/3.3 V Operation			2.5	3.3	mA	5 MHz logic signal frequency
3.3 V/5 V Operation			4.4	6.5	mA	5 MHz logic signal frequency
<b>ADuM3402-EP, Total Supply Current<sup>1</sup></b>						
DC to 2 Mbps						
$V_{DD1}$ Supply Current	$I_{DD1(Q)}$					
5 V/3.3 V Operation			2.0	2.8	mA	DC to 1 MHz logic signal frequency
3.3 V/5 V Operation			1.2	1.7	mA	DC to 1 MHz logic signal frequency
$V_{DD2}$ Supply Current	$I_{DD2(Q)}$					
5 V/3.3 V Operation			1.2	1.7	mA	DC to 1 MHz logic signal frequency
3.3 V/5 V Operation			2.0	2.8	mA	DC to 1 MHz logic signal frequency

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
10 Mbps						
V <sub>DD1</sub> Supply Current	I <sub>DD1</sub> (10)					
5 V/3.3 V Operation			6.0	7.5	mA	5 MHz logic signal frequency
3.3 V/5 V Operation			3.3	4.4	mA	5 MHz logic signal frequency
V <sub>DD2</sub> Supply Current	I <sub>DD2</sub> (10)					
5 V/3.3 V Operation			3.3	4.4	mA	5 MHz logic signal frequency
3.3 V/5 V Operation			6.0	7.5	mA	5 MHz logic signal frequency
For All Models						
Input Leakage per Channel	I <sub>I</sub>	-10	+0.01	+10	μA	0 V ≤ V <sub>Ix</sub> ≤ V <sub>DDx</sub>
V <sub>Ex</sub> Input Pull-Up Current	I <sub>PU</sub>	-10	-3			V <sub>Ex</sub> = 0 V
Tristate Leakage Current per Channel	I <sub>OZ</sub>	-10	+0.01	+10	μA	
Logic High Input Threshold	V <sub>IH</sub> , V <sub>EH</sub>					
5 V/3.3 V Operation		2.0			V	
3.3 V/5 V Operation		1.6			V	
Logic Low Input Threshold	V <sub>IL</sub> , V <sub>EL</sub>					
5 V/3.3 V Operation				0.8	V	
3.3 V/5 V Operation				0.4	V	
Logic High Output Voltages	V <sub>OAH</sub> , V <sub>OBH</sub>	(V <sub>DD1</sub> or V <sub>DD2</sub> ) - 0.1	(V <sub>DD1</sub> or V <sub>DD2</sub> )		V	I <sub>Ox</sub> <sup>2</sup> = -20 μA, V <sub>Ix</sub> = V <sub>IxH</sub> <sup>3</sup>
	V <sub>OCH</sub> , V <sub>ODH</sub>	(V <sub>DD1</sub> or V <sub>DD2</sub> ) - 0.4	(V <sub>DD1</sub> or V <sub>DD2</sub> ) - 0.2		V	I <sub>Ox</sub> <sup>2</sup> = -4 mA, V <sub>Ix</sub> = V <sub>IxH</sub> <sup>3</sup>
Logic Low Output Voltages	V <sub>OAL</sub> , V <sub>OBL</sub>		0.0	0.1	V	I <sub>Ox</sub> <sup>2</sup> = 20 μA, V <sub>Ix</sub> = V <sub>IxL</sub> <sup>4</sup>
	V <sub>OCL</sub> , V <sub>ODL</sub>		0.04	0.1	V	I <sub>Ox</sub> <sup>2</sup> = 400 μA, V <sub>Ix</sub> = V <sub>IxL</sub> <sup>4</sup>
			0.2	0.4	V	I <sub>Ox</sub> <sup>2</sup> = 4 mA, V <sub>Ix</sub> = V <sub>IxL</sub> <sup>4</sup>
<b>SWITCHING SPECIFICATIONS</b>						
Minimum Pulse Width	PW			100	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Maximum Data Rate		10			Mbps	C <sub>L</sub> = 15 pF, CMOS signal levels
Propagation Delay	t <sub>PHL</sub> , t <sub>PLH</sub>	15	35	50	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Pulse Width Distortion,  t <sub>PLH</sub> - t <sub>PHL</sub>	PWD			3	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Change vs. Temperature			5		ps/°C	C <sub>L</sub> = 15 pF, CMOS signal levels
Propagation Delay Skew	t <sub>PSK</sub>			22	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Channel to Channel Matching						
Codirectional Channels	t <sub>PSKCD</sub>			3	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Opposing Directional Channels	t <sub>PSKOD</sub>			6	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
For All Models						
Output Propagation Delay						
Disable (High/Low-to-High Impedance)	t <sub>PHZ</sub> , t <sub>PLH</sub>		6	8	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Enable (High Impedance-to-High/Low)	t <sub>PZH</sub> , t <sub>PZL</sub>		6	8	ns	C <sub>L</sub> = 15 pF, CMOS signal levels
Output Rise/Fall Time (10% to 90%)	t <sub>r</sub> /t <sub>f</sub>					C <sub>L</sub> = 15 pF, CMOS signal levels
5 V/3.3 V Operation			3.0		ns	
3.3 V/5 V Operation			2.5		ns	
Common-Mode Transient Immunity						
Logic High Output <sup>5</sup>	CM <sub>H</sub>	25	35		kV/μs	V <sub>Ix</sub> = V <sub>DD1</sub> /V <sub>DD2</sub> , V <sub>CM</sub> = 1000 V, transient magnitude = 800 V
Logic Low Output <sup>5</sup>	CM <sub>L</sub>	25	35		kV/μs	V <sub>Ix</sub> = 0 V, V <sub>CM</sub> = 1000 V, transient magnitude = 800 V
Refresh Rate	f <sub>r</sub>					
5 V/3.3 V Operation			1.2		Mbps	
3.3 V/5 V Operation			1.1		Mbps	



Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
Dynamic Supply Current per Channel <sup>6</sup>	I <sub>DD1 (D)</sub>					
Input						
5 V/3.3 V Operation			0.20			
3.3 V/5 V Operation			0.10			
Output	I <sub>DD0 (D)</sub>					
5 V/3.3 V Operation						
3.3 V/5 V Operation			0.03			
			0.05			

<sup>1</sup> The supply current values for all four channels are combined when running at identical data rates. Output supply current values are specified with no output load present. See Figure 8 through Figure 10 for information on per channel supply current as a function of data rate for unloaded and loaded conditions. See Figure 11 through Figure 15 for total V<sub>DD1</sub> and V<sub>DD2</sub> supply currents as a function of data rate for ADuM3400-EP/ADuM3401-EP/ADuM3402-EP channel configurations.

<sup>2</sup> I<sub>OX</sub> is the Channel x output current, where x = A, B, C, or D.

<sup>3</sup> V<sub>IxH</sub> is the input side logic high.

<sup>4</sup> V<sub>IxL</sub> is the input side logic low.

<sup>5</sup> CM<sub>H</sub> is the maximum common-mode voltage slew rate that can be sustained while maintaining V<sub>OUT</sub> > 0.8 V<sub>DD2</sub>. CM<sub>L</sub> is the maximum common-mode voltage slew rate that can be sustained while maintaining V<sub>OUT</sub> < 0.8 V. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges. The transient magnitude is the range over which the common mode is slewed.

<sup>6</sup> Dynamic supply current is the incremental amount of supply current required for a 1 Mbps increase in signal data rate. See Figure 8 through Figure 10 for information on per-channel supply current for unloaded and loaded conditions.

**PACKAGE CHARACTERISTICS**

Table 4.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions/Comments
Resistance (Input to Output) <sup>1</sup>	R <sub>IO</sub>		10 <sup>12</sup>		Ω	
Capacitance (Input to Output) <sup>1</sup>	C <sub>IO</sub>		2.2		pF	f = 1 MHz
Input Capacitance <sup>2</sup>	C <sub>I</sub>		4.0		pF	
IC Junction to Case Thermal Resistance						
Side 1	θ <sub>JCI</sub>		33		°C/W	Thermocouple located at center of package underside
Side 2	θ <sub>JCO</sub>		28		°C/W	Thermocouple located at center of package underside

<sup>1</sup> Device considered a 2-terminal device; Pin 1 to Pin 8 are shorted together, and Pin 9 to Pin 16 are shorted together.

<sup>2</sup> Input capacitance is from any input data pin to ground.

**REGULATORY INFORMATION**

The [ADuM3400-EP/ADuM3401-EP/ADuM3402-EP](#) are pending approval by the organizations listed in Table 5.

Table 5.

UL (Pending)	CSA (Pending)	VDE (Pending)
Recognized under 1577 Component Recognition Program <sup>1</sup>	Approved under CSA Component Acceptance Notice 5A	Certified according to DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 <sup>2</sup>
Single Protection, 2500 V rms Isolation Voltage	Basic insulation per CSA 60950-1-03 and IEC 60950-1, 800 V rms (1131 V peak) maximum working voltage Reinforced insulation per CSA 60950-1-03 and IEC 60950-1, 400 V rms (566 V peak) maximum working voltage	Reinforced insulation, 560 V peak
File E214100	File 205078	File 2471900-4880-0001

<sup>1</sup> In accordance with UL 1577, each [ADuM3400-EP/ADuM3401-EP/ADuM3402-EP](#) is proof tested by applying an insulation test voltage ≥3000 V rms for 1 sec (current leakage detection limit = 5 μA).

<sup>2</sup> In accordance with DIN V VDE V 0884-10, each [ADuM3400-EP/ADuM3401-EP/ADuM3402-EP](#) is proof tested by applying an insulation test voltage ≥1050 V peak for 1 sec (partial discharge detection limit = 5 pC). The \* marking branded on the component designates DIN V VDE V 0884-10 approval.

**INSULATION AND SAFETY-RELATED SPECIFICATIONS**

Table 6.

Parameter	Symbol	Value	Unit	Test Conditions/Comments
Rated Dielectric Insulation Voltage		2500	V rms	1 minute duration
Minimum External Air Gap (Clearance)	L(I01)	7.8 min	mm	Measured from input terminals to output terminals, shortest distance through air
Minimum External Tracking (Creepage)	L(I02)	7.8 min	mm	Measured from input terminals to output terminals, shortest distance path along body
Minimum Clearance in the Plane of the Printed Circuit Board (PCB Clearance)	L(PCB)	8.1 min	mm	Measured from input terminals to output terminals, shortest distance through air, line of sight, in the PCB mounting plane
Minimum Internal Gap (Internal Clearance)		0.017 min	mm	Insulation distance through insulation
Tracking Resistance (Comparative Tracking Index)	CTI	>400	V	DIN IEC 112/VDE 0303 Part 1
Isolation Group		II		Material Group (DIN VDE 0110, 1/89, Table 1)

**DIN V VDE V 0884-10 (VDE V 0884-10) INSULATION CHARACTERISTICS**

These isolators are suitable for reinforced electrical isolation only within the safety limit data. Maintenance of the safety data is ensured by protective circuits. The \* marking on packages denotes DIN V VDE V 0884-10 approval.

**Table 7.**

Description	Test Conditions/Comments	Symbol	Characteristic	Unit
Installation Classification per DIN VDE 0110 For Rated Mains Voltage ≤ 150 V rms For Rated Mains Voltage ≤ 300 V rms For Rated Mains Voltage ≤ 400 V rms			I to IV I to III I to II	
Climatic Classification			40/105/21	
Pollution Degree per DIN VDE 0110, Table 1			2	
Maximum Working Insulation Voltage		V <sub>IORM</sub>	560	V peak
Input-to-Output Test Voltage, Method B1	V <sub>IORM</sub> × 1.875 = V <sub>PR</sub> , 100% production test, t <sub>m</sub> = 1 sec, partial discharge < 5 pC	V <sub>PR</sub>	1050	V peak
Input-to-Output Test Voltage, Method A	V <sub>IORM</sub> × 1.6 = V <sub>PR</sub> , t <sub>m</sub> = 60 sec, partial discharge < 5 pC	V <sub>PR</sub>		
After Environmental Tests Subgroup 1			896	V peak
After Input and/or Safety Test Subgroup 2 and Subgroup 3	V <sub>IORM</sub> × 1.2 = V <sub>PR</sub> , t <sub>m</sub> = 60 sec, partial discharge < 5 pC		672	V peak
Highest Allowable Overtoltage	Transient overvoltage, t <sub>TR</sub> = 10 seconds	V <sub>TR</sub>	4000	V peak
Safety-Limiting Values	Maximum value allowed in the event of a failure (see Figure 4)			
Case Temperature		T <sub>S</sub>	150	°C
Side 1 Current		I <sub>S1</sub>	265	mA
Side 2 Current		I <sub>S2</sub>	335	mA
Insulation Resistance at T <sub>S</sub>	V <sub>IO</sub> = 500 V	R <sub>S</sub>	>10 <sup>9</sup>	Ω

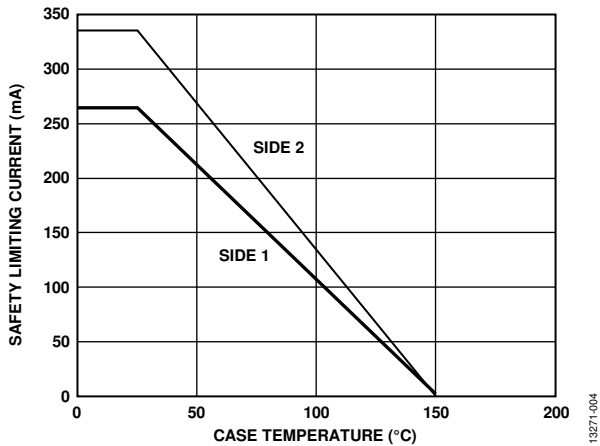


Figure 4. Thermal Derating Curve, Dependence of Safety Limiting Values with Case Temperature per DIN V VDE V 0884-10

**RECOMMENDED OPERATING CONDITIONS**

**Table 8.**

Parameter	Rating
Operating Temperature Range (T <sub>A</sub> )	-55°C to +125°C
Supply Voltages (V <sub>DD1</sub> , V <sub>DD2</sub> ) <sup>1</sup>	3.135 V to 5.5 V
Input Signal Rise and Fall Times	1.0 ms

<sup>1</sup> All voltages are relative to their respective ground.

## ABSOLUTE MAXIMUM RATINGS

Ambient temperature = 25°C, unless otherwise noted.

Table 9.

Parameter	Rating
Storage Temperature Range ( $T_{ST}$ )	-65°C to +150°C
Ambient Operating Temperature Range ( $T_A$ )	-55°C to +125°C
Supply Voltages ( $V_{DD1}$ , $V_{DD2}$ ) <sup>1</sup>	-0.5 V to +7.0 V
Input Voltage ( $V_{IA}$ , $V_{IB}$ , $V_{IC}$ , $V_{ID}$ , $V_{E1}$ , $V_{E2}$ ) <sup>1, 2</sup>	-0.5 V to $V_{DD1} + 0.5$ V
Output Voltage ( $V_{OA}$ , $V_{OB}$ , $V_{OC}$ , $V_{OD}$ ) <sup>1, 2</sup>	-0.5 V to $V_{DD0} + 0.5$ V
Average Output Current per Pin <sup>3</sup>	
Side 1 ( $I_{O1}$ )	-18 mA to +18 mA
Side 2 ( $I_{O2}$ )	-22 mA to +22 mA
Common-Mode Transients ( $CM_H$ , $CM_L$ ) <sup>4</sup>	-100 kV/ $\mu$ s to +100 kV/ $\mu$ s

<sup>1</sup> All voltages are relative to their respective ground.

<sup>2</sup>  $V_{DD1}$  and  $V_{DD0}$  refer to the supply voltages on the input and output sides of a given channel, respectively.

<sup>3</sup> See Figure 4 for maximum rated current values for various temperatures.

<sup>4</sup> Refers to common-mode transients across the insulation barrier. Common-mode transients exceeding the Absolute Maximum Ratings can cause latch-up or permanent damage.

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

### ESD CAUTION



**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Table 10. Maximum Continuous Working Voltage<sup>1</sup>

Parameter	Max	Unit	Constraint
AC Voltage			
Bipolar Waveform	565	V peak	50-year minimum lifetime
Unipolar Waveform			
Basic Insulation	1131	V peak	Maximum approved working voltage per IEC 60950-1
Reinforced Insulation	560	V peak	Maximum approved working voltage per IEC 60950-1 and VDE V 0884-10
DC Voltage			
Basic Insulation	1131	V peak	Maximum approved working voltage per IEC 60950-1
Reinforced Insulation	560	V peak	Maximum approved working voltage per IEC 60950-1 and VDE V 0884-10

<sup>1</sup> Refers to continuous voltage magnitude imposed across the isolation barrier.

Table 11. Truth Table (Positive Logic)


$V_{IX}$ Input <sup>1, 2</sup>	$V_{EX}$ Input <sup>3, 2</sup>	$V_{DD1}$ State <sup>1</sup>	$V_{DD0}$ State <sup>1</sup>	$V_{OX}$ Output <sup>1</sup>	Notes
H	H or NC	Powered	Powered	H	Outputs return to the input state within 1 $\mu$ s of $V_{DD1}$ power restoration.
L	H or NC	Powered	Powered	L	
X	L	Powered	Powered	Z	
X	H or NC	Unpowered	Powered	H	
X	L	Unpowered	Powered	Z	
X	X	Powered	Unpowered	Indeterminate	Outputs return to the input state within 1 $\mu$ s of $V_{DD0}$ power restoration if $V_{EX}$ state is H or NC. Outputs return to high impedance state within 8 ns of $V_{DD0}$ power restoration if $V_{EX}$ state is L.

<sup>1</sup>  $V_{IX}$  and  $V_{OX}$  refer to the input and output signals of a given channel (A, B, C, or D).  $V_{EX}$  refers to the output enable signal on the same side as the  $V_{OX}$  outputs.  $V_{DD1}$  and  $V_{DD0}$  refer to the supply voltages on the input and output sides of the given channel, respectively.

<sup>2</sup> H is high, L is low, X is don't care, and NC is no connect.

<sup>3</sup> In noisy environments, connecting  $V_{EX}$  to an external logic high or low is recommended.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS



\*PIN 2 AND PIN 8 ARE INTERNALLY CONNECTED AND CONNECTING BOTH TO GND<sub>1</sub> IS RECOMMENDED. PIN 9 AND PIN 15 ARE INTERNALLY CONNECTED AND CONNECTING BOTH TO GND<sub>2</sub> IS RECOMMENDED. IN NOISY ENVIRONMENTS, CONNECTING OUTPUT ENABLES (PIN 7 FOR ADuM3401-EP/ADuM3402-EP AND PIN 10 FOR ALL MODELS) TO AN EXTERNAL LOGIC HIGH OR LOW IS RECOMMENDED.


13271-005

Figure 5. ADuM3400-EP Pin Configuration

Table 12. ADuM3400-EP Pin Function Descriptions

Pin No.	Mnemonic	Description
1	V <sub>DD1</sub>	Supply Voltage for Isolator Side 1, 3.135 V to 5.5 V.
2, 8	GND <sub>1</sub>	Ground 1. Ground reference for Isolator Side 1.
3	V <sub>IA</sub>	Logic Input A.
4	V <sub>IB</sub>	Logic Input B.
5	V <sub>IC</sub>	Logic Input C.
6	V <sub>ID</sub>	Logic Input D.
7	NC	No Connect.
9, 15	GND <sub>2</sub>	Ground 2. Ground reference for Isolator Side 2.
10	V <sub>E2</sub>	Output Enable 2. Active high logic input. V <sub>OA</sub> , V <sub>OB</sub> , V <sub>OC</sub> , and V <sub>OD</sub> outputs are enabled when V <sub>E2</sub> is high or disconnected. V <sub>OA</sub> , V <sub>OB</sub> , V <sub>OC</sub> , and V <sub>OD</sub> outputs are disabled when V <sub>E2</sub> is low. In noisy environments, connecting V <sub>E2</sub> to an external logic high or low is recommended.
11	V <sub>OD</sub>	Logic Output D.
12	V <sub>OC</sub>	Logic Output C.
13	V <sub>OB</sub>	Logic Output B.
14	V <sub>OA</sub>	Logic Output A.
16	V <sub>DD2</sub>	Supply Voltage for Isolator Side 2, 3.135 V to 5.5 V.






\*PIN 2 AND PIN 8 ARE INTERNALLY CONNECTED AND CONNECTING BOTH TO GND<sub>1</sub> IS RECOMMENDED. PIN 9 AND PIN 15 ARE INTERNALLY CONNECTED AND CONNECTING BOTH TO GND<sub>2</sub> IS RECOMMENDED. IN NOISY ENVIRONMENTS, CONNECTING OUTPUT ENABLES (PIN 7 FOR ADuM3401-EP/ADuM3402-EP AND PIN 10 FOR ALL MODELS) TO AN EXTERNAL LOGIC HIGH OR LOW IS RECOMMENDED.

13271-006

Figure 6. ADuM3401-EP Pin Configuration

Table 13. ADuM3401-EP Pin Function Descriptions

Pin No.	Mnemonic	Description
1	VDD1	Supply Voltage for Isolator Side 1, 3.135 V to 5.5 V.
2, 8	GND <sub>1</sub>	Ground 1. Ground reference for Isolator Side 1.
3	V <sub>IA</sub>	Logic Input A.
4	V <sub>IB</sub>	Logic Input B.
5	V <sub>IC</sub>	Logic Input C.
6	V <sub>OD</sub>	Logic Output D.
7	V <sub>E1</sub>	Output Enable 1. Active high logic input. V <sub>OD</sub> output is enabled when V <sub>E1</sub> is high or disconnected. V <sub>OD</sub> is disabled when V <sub>E1</sub> is low. In noisy environments, connecting V <sub>E1</sub> to an external logic high or low is recommended.
9, 15	GND <sub>2</sub>	Ground 2. Ground reference for Isolator Side 2.
10	V <sub>E2</sub>	Output Enable 2. Active high logic input. V <sub>OA</sub> , V <sub>OB</sub> , and V <sub>OC</sub> outputs are enabled when V <sub>E2</sub> is high or disconnected. V <sub>OA</sub> , V <sub>OB</sub> , and V <sub>OC</sub> outputs are disabled when V <sub>E2</sub> is low. In noisy environments, connecting V <sub>E2</sub> to an external logic high or low is recommended.
11	V <sub>ID</sub>	Logic Input D.
12	V <sub>OC</sub>	Logic Output C.
13	V <sub>OB</sub>	Logic Output B.
14	V <sub>OA</sub>	Logic Output A.
16	VDD2	Supply Voltage for Isolator Side 1, 3.135 V to 5.5 V.



\*PIN 2 AND PIN 8 ARE INTERNALLY CONNECTED AND CONNECTING BOTH TO GND<sub>1</sub> IS RECOMMENDED. PIN 9 AND PIN 15 ARE INTERNALLY CONNECTED AND CONNECTING BOTH TO GND<sub>2</sub> IS RECOMMENDED. IN NOISY ENVIRONMENTS, CONNECTING OUTPUT ENABLES (PIN 7 FOR ADuM3401-EP/ADuM3402-EP AND PIN 10 FOR ALL MODELS) TO AN EXTERNAL LOGIC HIGH OR LOW IS RECOMMENDED.

13271-007

Figure 7. ADuM3402-EP Pin Configuration

Table 14. ADuM3402-EP Pin Function Descriptions

Pin No.	Mnemonic	Description
1	V <sub>DD1</sub>	Supply Voltage for Isolator Side 1, 3.135 V to 5.5 V.
2, 8	GND <sub>1</sub>	Ground 1. Ground reference for Isolator Side 1.
3	V <sub>IA</sub>	Logic Input A.
4	V <sub>IB</sub>	Logic Input B.
5	V <sub>OC</sub>	Logic Output C.
6	V <sub>OD</sub>	Logic Output D.
7	V <sub>E1</sub>	Output Enable 1. Active high logic input. V <sub>OC</sub> and V <sub>OD</sub> outputs are enabled when V <sub>E1</sub> is high or disconnected. V <sub>OC</sub> and V <sub>OD</sub> outputs are disabled when V <sub>E1</sub> is low. In noisy environments, connecting V <sub>E1</sub> to an external logic high or low is recommended.
9, 15	GND <sub>2</sub>	Ground 2. Ground reference for Isolator Side 2.
10	V <sub>E2</sub>	Output Enable 2. Active high logic input. V <sub>OA</sub> and V <sub>OB</sub> outputs are enabled when V <sub>E2</sub> is high or disconnected. V <sub>OA</sub> and V <sub>OB</sub> outputs are disabled when V <sub>E2</sub> is low. In noisy environments, connecting V <sub>E2</sub> to an external logic high or low is recommended.
11	V <sub>ID</sub>	Logic Input D.
12	V <sub>IC</sub>	Logic Input C.
13	V <sub>OB</sub>	Logic Output B.
14	V <sub>OA</sub>	Logic Output A.
16	V <sub>DD2</sub>	Supply Voltage for Isolator Side 2, 3.135 V to 5.5 V.

### TYPICAL PERFORMANCE CHARACTERISTICS

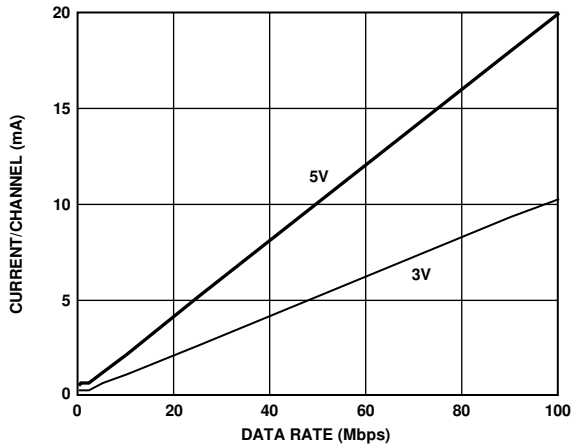


Figure 8. Typical Input Supply Current per Channel vs. Data Rate (No Load)

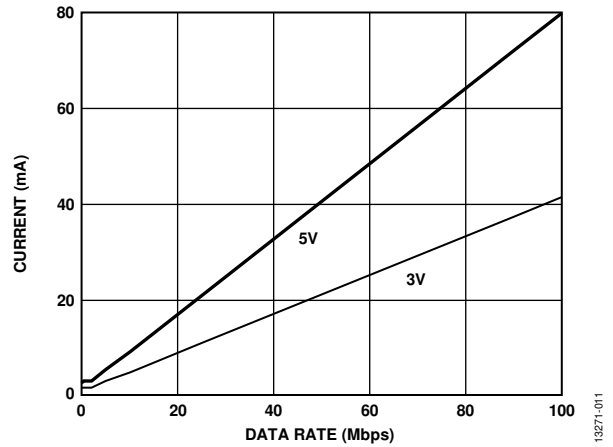


Figure 11. Typical ADuM3400-EP VDD1 Supply Current vs. Data Rate for 5V and 3.3V Operation

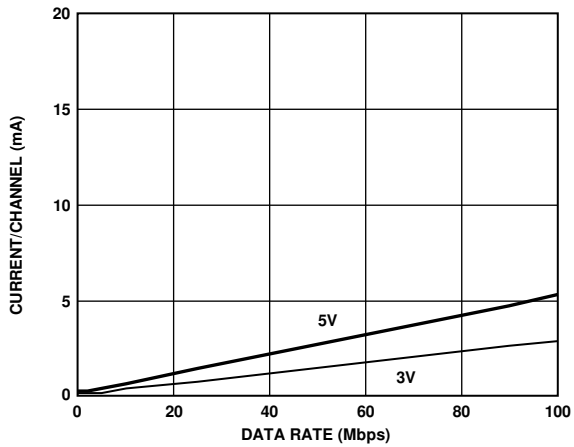


Figure 9. Typical Output Supply Current per Channel vs. Data Rate (No Load)

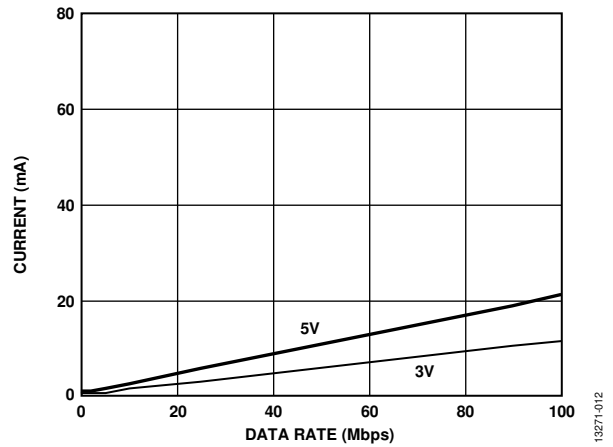


Figure 12. Typical ADuM3400-EP VDD2 Supply Current vs. Data Rate for 5V and 3.3V Operation

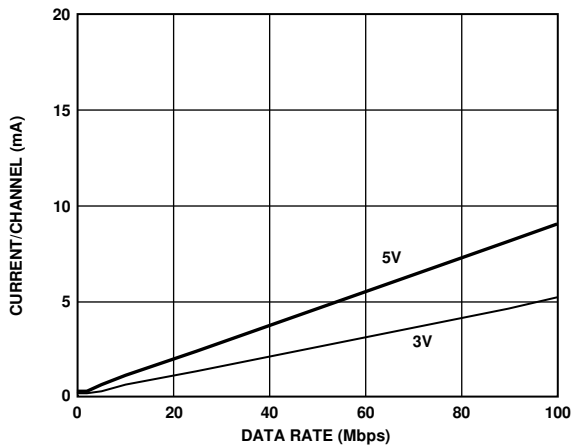


Figure 10. Typical Output Supply Current per Channel vs. Data Rate (15 pF Output Load)

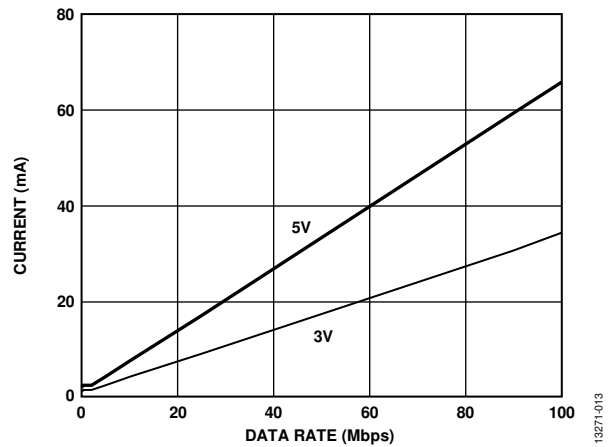


Figure 13. Typical ADuM3401-EP VDD1 Supply Current vs. Data Rate for 5V and 3.3V Operation

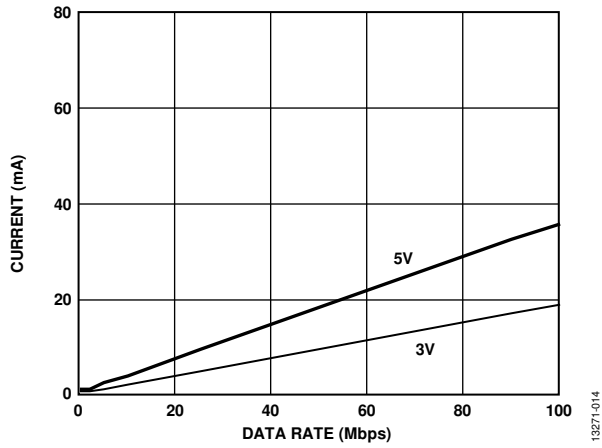


Figure 14. Typical ADuM3401-EP  $V_{DD2}$  Supply Current vs. Data Rate for 5V and 3.3V Operation

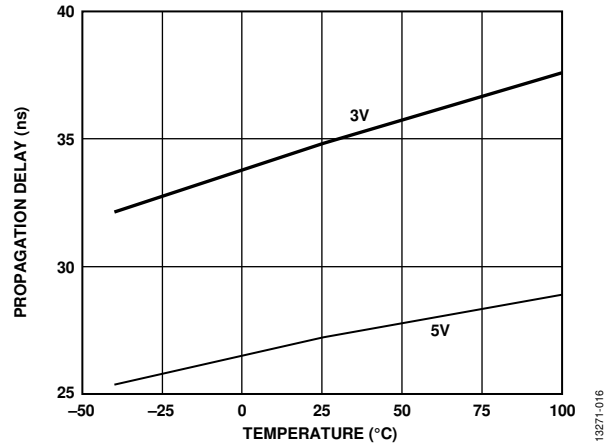


Figure 16. Propagation Delay vs. Temperature


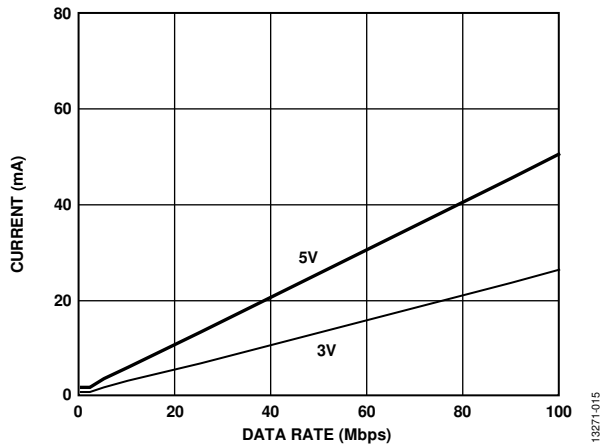


Figure 15. Typical ADuM3402-EP  $V_{DD1}$  or  $V_{DD2}$  Supply Current vs. Data Rate for 5V and 3.3V Operation

# OUTLINE DIMENSIONS

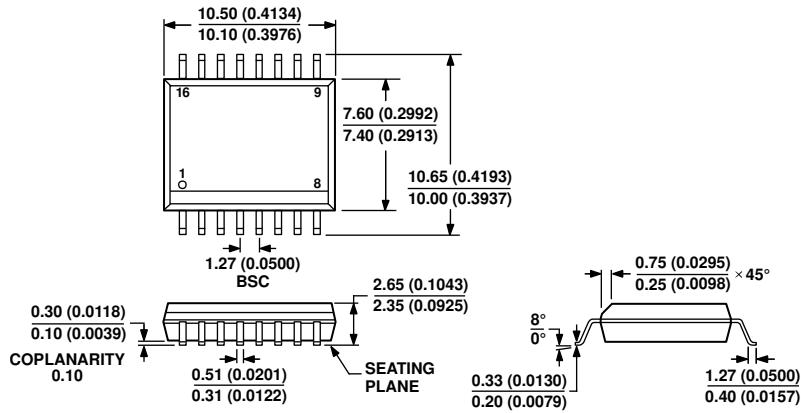

COMPLIANT TO JEDEC STANDARDS MS-013-AA  
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

03-27-2007-B

Figure 17. 16-Lead Standard Small Outline Package [SOIC\_W]  
 Wide Body (RW-16)  
 Dimensions shown in millimeters and (inches)

## ORDERING GUIDE

Model <sup>1</sup>	Number of Inputs, V <sub>DD1</sub> Side	Number of Inputs, V <sub>DD2</sub> Side	Maximum Data Rate (Mbps)	Maximum Propagation Delay, 5 V (ns)	Temperature Range	Package Description	Package Option
ADUM3400TRWZ-EP	4	0	10	50	-55°C to +125°C	16-Lead SOIC_W	RW-16
ADUM3400TRWZ-EP-RL	4	0	10	50	-55°C to +125°C	16-Lead SOIC_W	RW-16
ADUM3401TRWZ-EP	3	1	10	50	-55°C to +125°C	16-Lead SOIC_W	RW-16
ADUM3401TRWZ-EP-RL	3	1	10	50	-55°C to +125°C	16-Lead SOIC_W	RW-16
ADUM3402TRWZ-EP	2	2	10	50	-55°C to +125°C	16-Lead SOIC_W	RW-16
ADUM3402TRWZ-EP-RL	2	2	10	50	-55°C to +125°C	16-Lead SOIC_W	RW-16

<sup>1</sup> Z = RoHS Compliant Part.