



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**FEATURES**

- High performance, z-axis digital output accelerometer**
- ±14.2 g full-scale range at 16-bit resolution (0.434 mg/LSB)**
- 2 kHz output sample rate with optional data FIFOs**
- Programmable filter response**
- 20 Hz, 46 Hz, 92 Hz, 184 Hz**
- Continuous electromechanical self test**
- Additional key-on and on demand self test routines**
- Z-axis offset adjust**
- Low quiescent current draw**
- High linearity performance**
- Qualified for automotive applications**
- −40°C to +105°C temperature range**

**APPLICATIONS**

- Vehicle rollover detection**
- Platform stabilization/leveling**

**GENERAL DESCRIPTION**

The **ADXL701** device is a high precision, single z-axis accelerometer designed for vehicle rollover detection and other high performance applications. The **ADXL701** provides offset stability to better than ±500 mg and sensitivity stability to better than 5% across the entire temperature range. The **ADXL701** is designed with selectable −3 dB filter corner frequencies to satisfy a range of applications, and the 2 kHz output data rate allows sufficient oversampling of the acceleration information.

The acceleration data output from the device is a true 16-bit word and is contained in a 32-bit SPI transaction. The SPI interface contains additional fault detection bits and data formatting bits designed to assist high reliability applications. SPI communications are compatible up to 8 MHz. The 16-bit acceleration data-word offers a resolution of 0.434 mg/LSB for the ±14.2 g full-scale range of the device.

The **ADXL701** is available in an SOIC package with an inverted paddle for improved EMI/RFI robustness. The **ADXL701** operates at nominal power supplies of 3.3 V and 5 V, and is specified to operate across the full automotive temperature range of −40°C to +105°C.

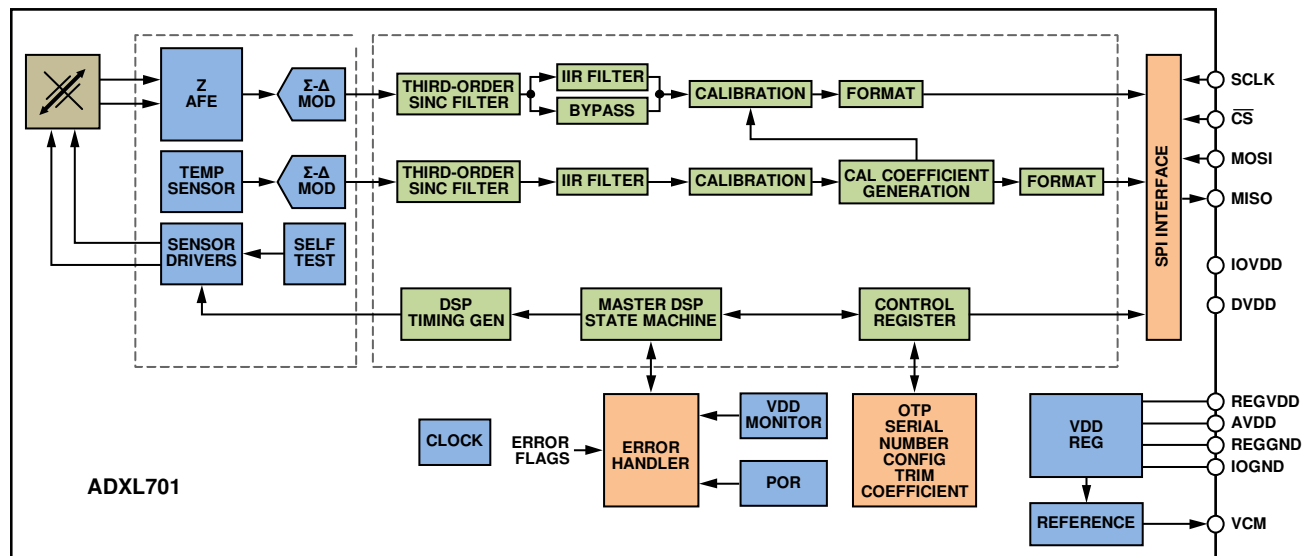
**FUNCTIONAL BLOCK DIAGRAM**


Figure 1.

For more information about the **ADXL701**, please contact the Analog Devices, Inc., *Customer Interaction Center* at [http://www.analog.com/en/content/technical\\_support\\_page/fca.html](http://www.analog.com/en/content/technical_support_page/fca.html) to connect with a technical support specialist.

# ADXL701\* PRODUCT PAGE QUICK LINKS

Last Content Update: 02/23/2017

---

## COMPARABLE PARTS

View a parametric search of comparable parts.

## DOCUMENTATION

### Data Sheet

- ADXL701: High Precision, Low-g, Digital Z-Axis Accelerometer Data Sheet

## DESIGN RESOURCES

- ADXL701 Material Declaration
- PCN-PDN Information
- Quality And Reliability
- Symbols and Footprints

## DISCUSSIONS

View all ADXL701 EngineerZone Discussions.

## SAMPLE AND BUY

Visit the product page to see pricing options.

## TECHNICAL SUPPORT

Submit a technical question or find your regional support number.

## DOCUMENT FEEDBACK

Submit feedback for this data sheet.

---

**NOTES**