



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## FEATURES

- High performance, in-plane roll rate gyroscope**
- Temperature compensated, high precision offset and sensitivity performance**
- 2°/sec rms maximum gyroscope noise**
- Serial port interface (SPI) digital output with 16-bit data word**
- <20 mA quiescent current consumption**
- 3.3 V and 5 V operation**
- −40°C to +105°C temperature range**
- 16-lead SOIC\_CAV surface-mount package for in-plane roll rate sensing**
- Qualified for automotive applications**

## APPLICATIONS

- Rollover detection**

## GENERAL DESCRIPTION

The [ADXRS910](#) is a high performance in-plane gyroscope, designed for automotive rollover detection applications. The [ADXRS910](#) also has an internal temperature sensor that is used to compensate offset and sensitivity performance, providing excellent stability over the −40°C to +105°C temperature range.

The gyroscope provides a full-scale range of  $\pm 300^\circ/\text{sec}$  with a sensitivity of 80 LSB/°/sec. Its resonating disk sensor structure enables angular rate measurement around an in-plane axis. The −3 dB filter corner frequency can be selected to be 24.6 Hz, 49 Hz, 102 Hz, or 201 Hz. The sensor data output from the device is a 16-bit, two's complement word contained in a 32-bit SPI transaction. SPI communications are compatible up to 10 MHz.

The [ADXRS910](#) is available in a 16-lead inverted SOIC package. The [ADXRS910](#) is specified to operate at 3.3 V and 5 V, with less than 20 mA of current consumption. Its specifications are valid over the −40°C to +105°C temperature range.

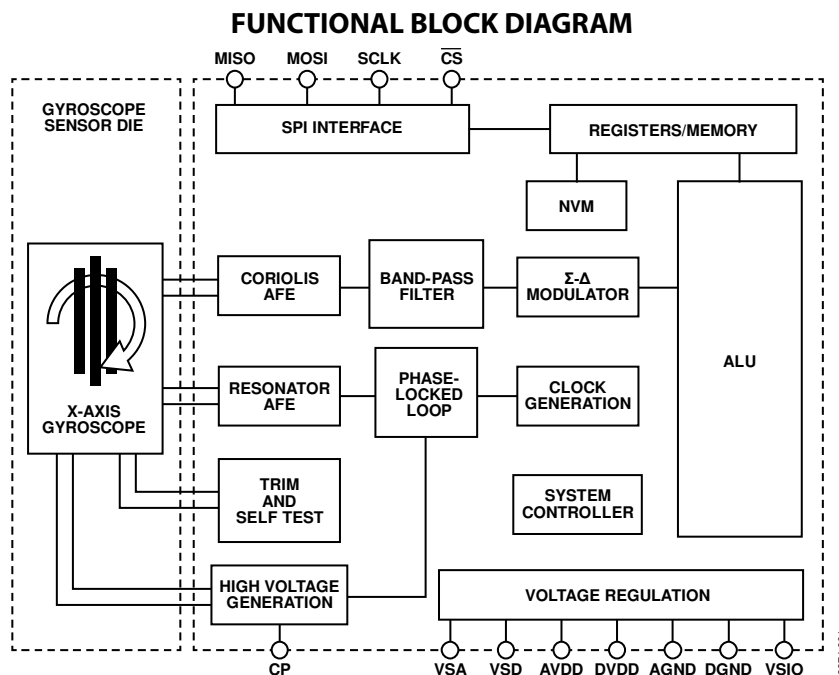


Figure 1.

For more information about the [ADXRS910](#), contact the Analog Devices, Inc., Customer Interaction Center at [www.analog.com/technical\\_support](http://www.analog.com/technical_support) to connect with a technical support specialist.

**NOTES**