



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






## FEET, CASTERS & GLIDES



**Adjustable Levelers**  
312 - 319, 324 - 335



**Furniture Casters**  
310 - 311

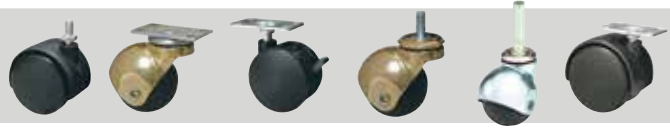

**Glides & Bumpers**  
332, 335 - 338



**Plate Casters**  
288 - 293, 298 - 300, 302 - 307



**Stem Casters**  
293 - 298, 303, 308



**Structural System Accessories**  
363 - 374



**Tube Connectors & Clamps**  
358 - 362



**Tube Insert Glides & Caps**  
347 - 348, 350 - 357



**Vibration Mounts**  
320 - 322, 339 - 345



**Wheels & Accessories**  
297 - 298, 300 - 301, 303



**PLATE CASTERS**

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Polyurethane	— Polyurethane tread molded to grey polypropylene core.
Polyolefin	— Black molded polyolefin.	TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.

**Institutional Casters Nickel Plated**  
**Medium Duty**  
**Applications: 375-450 Lbs.**


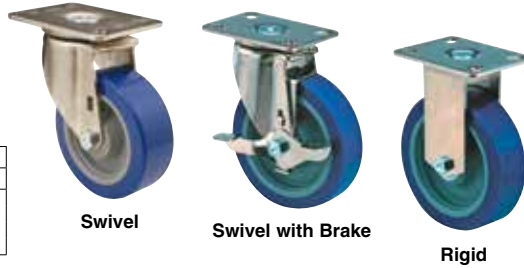


Plate Specifications	
Plate Type 97	
Overall Size	3 1/8 x 4 1/8
Hole Spacing	1 3/4 x 3 to 2 3/8 x 3 3/8
Hole Dia.	3/8 x 3/8 Slots
Bolt Dia.	5/16

Available in swivel, swivel with strap brake, and rigid casters with polyurethane and polyolefin treads and Delrin™ wheel bearings. NSF certified with swivel raceway dust covers and grease seals. Casters have a nickel finish.

Swivel w/Brake		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-256	28.76	WC-254	25.94	WC-255	20.30	4 x 1 1/2	Polyurethane	375	5 3/8
WC-265	20.08	WC-263	19.16	WC-264	14.42	4 x 1 1/2	Polyolefin	375	5 3/8
WC-259	29.89	—	—	WC-258	19.56	5 x 1 1/2	Polyurethane	450	6 3/8
WC-268	21.11	WC-266	18.53	WC-267	16.92	5 x 1 1/2	Polyolefin	450	6 3/8
WC-262	27.95	WC-260	24.59	WC-261	21.22	6 x 1 1/2	Polyurethane	450	7 3/8
WC-271	22.04	WC-269	19.54	—	—	6 x 1 1/2	Polyolefin	450	7 3/8

**Institutional Casters Large Plate**  
**Medium Duty**  
**Applications: 375-450 Lbs.**






Plate Specifications	
Plate Type 99	
Overall Size	3 3/4 x 4 3/8
Hole Spacing	2 5/8 x 3 3/8 to 3 x 3
Hole Dia.	3/8 x 3/8 Slots
Bolt Dia.	5/16


Available in swivel, swivel with strap brake, and rigid casters with polyurethane, polyolefin, and phenolic treads and roller wheel bearings. NSF certified with swivel raceway dust cover. Casters have a clear zinc finish.

Swivel w/Brake		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-274	29.89	WC-272	24.72	WC-273	21.42	4 x 1 1/2	Polyurethane	375	5 3/8
WC-283	21.62	WC-281	19.05	WC-282	15.96	4 x 1 1/2	Polyolefin	375	5 3/8
WC-292	23.69	WC-290	20.86	WC-291	15.96	4 x 1 1/2	Phenolic	450	5 3/8
WC-277	30.46	WC-275	27.62	WC-276	18.45	5 x 1 1/2	Polyurethane	450	6 3/8
WC-286	26.50	—	—	WC-285	16.71	5 x 1 1/2	Polyolefin	450	6 3/8
WC-295	22.65	WC-293	20.08	WC-294	16.99	5 x 1 1/2	Phenolic	450	6 3/8
WC-280	37.07	WC-278	31.92	WC-279	26.78	6 x 1 1/2	Polyurethane	450	7 3/8
WC-289	26.26	WC-287	22.14	WC-288	16.54	6 x 1 1/2	Polyolefin	450	7 3/8
WC-298	26.26	WC-296	22.14	WC-297	18.19	6 x 1 1/2	Phenolic	450	7 3/8

**Medium Heavy Duty**  
**Applications: 300-700 Lbs.**

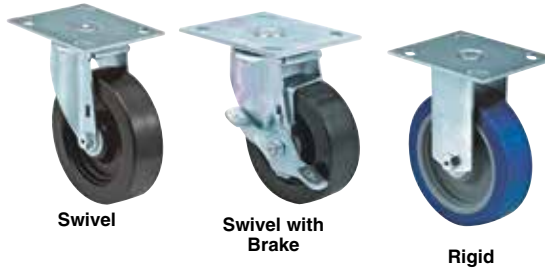

Top Plate A



Top Plate B

Plate Type	Plate Specifications	
	A	B
Overall Size	2 3/4 x 3 3/8	4 x 4 5/8
Hole Spacing	1 3/4 x 2 1/2 to 3	2 5/8 x 3 3/8 to 3 x 3
Hole Dia.	1 1/2 x 1 3/8 slots	3/8 x 3/8 slots
Bolt Dia.	5/16	3/8

Available as swivel, rigid, or swivel with total lock brake, which simultaneously locks wheel and swivel. High strength double ball, hardened raceways. Roller bearing wheel and 1/2" nut and bolt axle with grease zerk fitting.



Swivel w/ Brake		Swivel		Rigid		Top Plate Style	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each					
WC-1	30.78	WC-3	26.20	WC-5	19.01	A	4 x 2	TPR Rubber	300	5 3/8
—	—	WC-4	25.60	WC-6	18.84	B	4 x 2	TPR Rubber	300	5 3/8
WC-19	35.07	WC-21	28.72	WC-23	20.29	A	4 x 2	Polyurethane	600	5 3/8
WC-20	35.73	WC-22	29.41	WC-24	21.97	B	4 x 2	Polyurethane	600	5 3/8
WC-37	30.83	—	—	WC-41	17.05	A	4 x 2	Polyolefin	400	5 3/8
WC-38	31.46	WC-40	24.30	WC-42	22.24	B	4 x 2	Polyolefin	400	5 3/8
WC-55	30.14	WC-57	23.59	WC-59	14.66	A	4 x 2	Phenolic	600	5 3/8
WC-56	31.22	WC-58	22.17	WC-60	15.39	B	4 x 2	Phenolic	600	5 3/8
WC-7	32.79	—	—	WC-11	19.04	A	5 x 2	TPR Rubber	350	6 1/2
WC-8	41.80	WC-10	28.22	—	—	B	5 x 2	TPR Rubber	350	6 1/2
WC-25	35.83	WC-27	29.54	WC-29	21.69	A	5 x 2	Polyurethane	650	6 1/2
WC-26	34.73	WC-28	30.23	WC-30	20.42	B	5 x 2	Polyurethane	650	6 1/2
—	—	WC-63	22.65	—	—	A	5 x 2	Phenolic	650	6 1/2
WC-62	30.44	—	—	WC-66	16.79	B	5 x 2	Phenolic	650	6 1/2
—	—	—	—	WC-47	17.39	A	5 x 2	Polyolefin	450	6 1/2
WC-13	36.66	WC-15	34.39	—	—	A	6 x 2	TPR Rubber	400	7 1/2
WC-31	34.85	WC-33	29.21	WC-35	21.94	A	6 x 2	Polyurethane	700	7 1/2
WC-32	35.00	WC-34	32.68	WC-36	24.70	B	6 x 2	Polyurethane	700	7 1/2
WC-50	32.90	WC-52	32.21	—	—	B	6 x 2	Polyolefin	560	7 1/2
WC-67	29.81	WC-69	23.95	WC-71	17.90	A	6 x 2	Phenolic	700	7 1/2
WC-68	31.73	—	—	WC-72	17.78	B	6 x 2	Phenolic	700	7 1/2

PLATE CASTERS

Wheel Type Description			
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	TPR Rubber	— Thermoplastic non-marking rubber tread on polyolefin core.
Polyolefin	— Black molded polyolefin.		

**Institutional Casters Small Plate  
Medium Duty**  
Applications: 225-300 Lbs.



Swivel



Swivel with Brake




Plate Specifications	
Plate Type AM	
Overall Size	2 3/8 x 3 3/8
Hole Spacing	1 3/4 x 2 5/8 to 3
Hole Dia.	1 1/8 x 1/2 Slots
Bolt Dia.	7/16

Available in swivel, swivel with strap brake, and rigid casters with TPR rubber donut and polyurethane treads and precision ball wheel bearings. Casters have a clear zinc finish. NSF certified with swivel raceway dust covers.



Rigid

Swivel		Swivel w/Brake		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-248	12.40	WC-249	13.39	WC-250	10.73	4 x 1 1/4	Polyurethane	275	5 1/4
—	—	WC-243	15.63	WC-244	13.41	5 x 1 1/4	TPR Rubber	250	6 1/4
WC-251	12.48	WC-252	15.79	WC-253	11.92	5 x 1 1/4	Polyurethane	300	6 1/4


# NEW VIBRATION MOUNTS

Pages 342 - 343

**PLATE CASTERS**

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	Urethane	— Gray non-marking polyurethane tread on polyolefin hub with ball bearings and thread guards.
Rubber	— Gray Thermoplastic, non-marking rubber tread on polyolefin hub with ball bearings and thread guards.	Polypropylene	— Black molded polypropylene.
Polyolefin	— Black molded polyolefin.		

**Light Medium Duty Ball Bearings**  
Applications: 110-220 Lbs.



Top Plate

Plate Specifications	
Swivel Overall Size	2 3/4 x 3 3/4
Rigid Overall Size	3 x 3 3/4
Hole Spacing	1.77 x 2.95
Hole Dia.	2.05 x 2.84 slots
Bolt Dia.	5/16



Swivel with Total Lock Brake



Swivel





Rigid

Available in swivel, rigid or swivel with total lock brake which locks both wheel and swivel. Wheels have thread guards to protect against fabric threads.

Swivel w/ Brake		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-73	26.03	WC-74	20.79	—	—	3 x 1 1/4	Rubber	110	4 3/16
WC-82	24.95	—	—	—	—	3 x 1 1/4	Urethane	110	4 3/16
WC-79	31.66	—	—	—	—	5 x 1 1/4	Rubber	220	6 7/16
WC-88	29.84	—	—	WC-90	18.90	5 x 1 1/4	Urethane	220	6 7/16

**Low Profile Medium Duty**  
Applications: 300-500 Lbs.



Swivel



Swivel w/ Brake



Rigid

Plate Specifications			
Plate Type	AM	00	97
Overall Size	2 3/4 x 3 3/4	2 3/4 x 3 3/4	3 1/2 x 4 1/2
Hole Spacing	1 1/4 x 2 5/8 to 3	1 1/4 x 3	1 3/4 x 3 to 2 5/8-3-3/8
Hole Dia.	1 1/32 x 1/2 slots	1 1/32	5/8 x 3/4 slots
Bolt Dia.	5/16	5/16	5/16

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish.

Swivel		Swivel w/ Brake		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each						
WC-1509-140	9.30	—	—	—	—	Hard Rubber	2 1/2 x 1 13/16	300	Delrin	3 1/2	97
WC-1509-150	9.30	—	—	—	—	Hard Rubber	2 1/2 x 1 13/16	300	Delrin	3 1/2	97
WC-1527-110	7.41	—	—	—	—	Polyolefin	2 1/2 x 1 3/4	300	Plain	3 1/2	00
WC-1538-100	12.98	—	—	—	—	Phenolic Resin	2 5/8 x 1 3/4	350	Roller	3 5/16	00
WC-1509-130	8.37	—	—	—	—	Hard Rubber	2 x 1 13/16	200	Delrin	2 15/16	97
WC-1527-100	7.76	—	—	—	—	Polypropylene	2 x 1 1/2	350	Plain	2 15/16	97
—	—	WC-1538-125	12.60	—	—	Phenolic Resin	3 x 1 3/4	500	Roller	3 3/8	AM
—	—	WC-1538-140	14.42	—	—	Phenolic Resin	3 x 1 13/16	500	Roller	3 3/8	97
WC-1538-115	12.61	—	—	—	—	Phenolic Resin	3 x 1 13/16	500	Roller	3 3/8	00
WC-1527-160	7.73	—	—	—	—	Polyolefin	3 x 1 3/4	350	Sintered	3 3/8	00
WC-1527-170	10.41	—	—	—	—	Polyolefin	3 x 1 3/4	350	Roller	3 3/8	00
WC-1527-180	10.59	—	—	—	—	Polyolefin	3 x 1 3/4	350	Roller	3 3/8	97
WC-1538-110	15.83	—	—	—	—	Polypropylene	3 x 1 3/4	500	Roller	3 3/8	97
—	—	—	—	WC-1509-180	7.56	Hard Rubber	2 1/2 x 1 3/4	450	Precision	3 3/8	00
—	—	—	—	WC-1525-060	13.87	Polyurethane	3 x 1 3/4	450	Precision	3 3/8	00

PLATE CASTERS

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	Soft Rubber	— Black soft rubber tread molded to a black hard rubber core.
Polyolefin	— Black molded polyolefin.	Polypropylene	— Black molded polypropylene.

**General Purpose Casters**  
**Medium Duty**  
**Applications: 200-400 Lbs.**




Plate Specifications			
Plate Type	00	97	98
Overall Size	2 3/4 x 3 3/4	3 1/8 x 4 1/8	3 1/8 x 4 1/8
Hole Spacing	1 1/4 x 3	1 1/4 x 3 to 2 3/8 x 3 3/8	2 3/8 x 3 1/16
Hole Dia.	1 1/32	3/8 x 34 slots	1 1/32
Bolt Dia.	7/16	7/16	7/16



Swivel



Swivel w/ Brake



Rigid

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish.

Swivel w/ Brake		Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each						
WC-1204-020	13.67	—	—	WC-1204-010	13.98	Soft Rubber	4 x 1 3/8	200	Delrin	5 1/16	98
—	—	WC-1227-130	7.50	WC-1227-110	8.22	Polyolefin	4 x 1 3/8	300	Plain	5 1/16	00
—	—	WC-1227-140	7.72	—	—	Polyolefin	4 x 1 3/8	300	Plain	5 1/16	97
—	—	WC-1227-160	8.16	—	—	Polyolefin	5 x 1 3/8	350	Plain	6 1/16	00
—	—	WC-1227-190	9.25	—	—	Polyolefin	6 x 1 3/8	400	Delrin	7 1/16	97
—	—	WC-1227-200	9.26	—	—	Polypropylene	6 x 1 3/8	400	Delrin	7 1/16	98
—	—	—	—	WC-1227-180	9.70	Polyolefin	6 x 1 3/8	400	Plain	7 1/16	97


**Low Profile Medium**  
**Applications: 200 - 500 Lbs.**



Swivel



Rigid



Top Plate

Plate Specifications	
Overall Size	3 1/8 x 4 1/8
Hole Spacing	1 1/4 x 3 to 2 3/8 x 3 3/8
Hole Dia.	3/8 x 34 slots
Bolt Dia.	7/16

Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Bearing	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each					
WC-91	13.37	WC-92	7.96	2 x 1 1/16	Hard Rubber	Delrin	200	2 7/8
WC-93	13.69	WC-94	8.19	2 1/2 x 1 1/16	Hard Rubber	Delrin	300	3 1/16
WC-95	13.95	WC-96	8.50	3 x 1 1/16	Hard Rubber	Delrin	350	3 3/8
WC-97	14.31	—	—	3 x 1 3/4	Polyolefin	Sintered	350	3 3/8
WC-99*	19.24	—	—	3 x 1 3/4	Phenolic	Roller	500	3 3/8

\*Single Wheel

**General Purpose**  
**Light-Medium Duty**  
**Applications: 125-280 Lbs.**



Swivel



Rigid




Plate Specifications	
Plate Type 97	
Overall Size	3 1/8 x 4 1/8
Hole Spacing	1 1/4 x 3 to 2 3/8 x 3 3/8
Hole Dia.	3/8 x 34 Slots
Bolt Dia.	7/16

Available in swivel and rigid casters with soft rubber and polyurethane wheels with Delrin® bearings, polyolefin wheels with plain bearings. Casters have a clear zinc finish. Brake kit available for swivel casters.

Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
WC-218	7.20	WC-219	5.66	3 x 1 1/4	Soft Rubber	125	3 3/4
WC-224	7.79	WC-225	6.90	3 x 1 1/4	Polyurethane	210	3 3/4
WC-230	6.37	WC-231	6.01	3 x 1 1/4	Polyolefin	210	3 3/4
WC-220	8.06	—	—	4 x 1 1/4	Soft Rubber	165	4 1/16
WC-226	8.09	WC-227	9.13	4 x 1 1/4	Polyurethane	275	4 1/16
WC-232	9.01	—	—	4 x 1 1/4	Polyolefin	255	4 1/16
WC-222	9.88	—	—	5 x 1 1/4	Soft Rubber	190	5 3/8
WC-228	12.4	WC-229	10.16	5 x 1 1/4	Polyurethane	280	5 3/8
WC-234	8.49	WC-235	9.26	5 x 1 1/4	Polyolefin	280	5 3/8

**PLATE CASTERS**

Wheel Type Description			
Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
Polyurethane	— Polyurethane tread molded to gray polypropylene core.	Soft Rubber	— Black soft rubber tread molded to black hard rubber core.
Polyolefin	— Black molded polyolefin.	TPR Rubber	— Thermoplastic non-marking rubber tread on polyolefin core.
Polypropylene	— Black molded polypropylene.		

**Industrial Casters**  
**Light-Medium Duty**  
**Applications: 125-280 Lbs.**



Plate Specifications					
Plate Type	AM	00	97	98	T30
Overall Size	2 3/4 x 3 3/4	2 3/4 x 3 3/4	3 1/2 x 4 1/2	3 1/2 x 4 1/2	2 3/4 x 3 3/4
Hole Spacing	1 1/4 x 2 5/8 to 3	1 3/4 x 3	1 3/4 x 3 to 2 5/8-3-3/8	2 5/8 x 3 3/8	1 3/4 x 2 5/8 to 3
Hole Dia.	1 1/2 x 1/2 slots	1 1/2	3/8 x 3/4 slots	1 1/2	1 1/2 x 1/2
Bolt Dia.	5/16	5/16	5/16	5/16	5/16

Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish.



Swivel		Swivel w/ Brake		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each						
WC-2909-120	5.66	—	—	TPR Rubber	2 1/2 x 1 1/2	175	Sintered	3 7/16	00
WC-2909-140	5.98	—	—	Hard Rubber	2 1/2 x 1 1/2	175	Sintered	3 7/16	97
WC-2904-110	5.64	WC-2904-150	6.59	Soft Rubber	3 x 1 1/4	125	Delrin	3 3/4	00
WC-2904-100	5.86	—	—	Soft Rubber	3 x 1 1/4	125	Delrin	3 3/4	AM
WC-2909-180	6.45	WC-2909-160	7.41	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/4	97
WC-2927-110	4.82	WC-2927-120	5.77	Polyolefin	3 x 1 1/4	210	Plain	3 3/4	00
WC-2927-100	5.21	—	—	Polyolefin	3 x 1 1/4	210	Plain	3 3/4	98
—	—	WC-2927-130	7.26	Polyolefin	3 x 1 1/4	210	Plain	3 3/4	97
WC-2904-120	5.52	—	—	Soft Rubber	3 x 1 1/4	125	Delrin	3 3/4	00
WC-2909-200	5.98	—	—	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/4	00
WC-2909-220	6.20	—	—	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/4	AM
WC-2925-100	6.96	—	—	Polyurethane	3 x 1 1/4	210	Delrin	3 3/4	00
WC-2926-100	6.91	—	—	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/4	98
WC-2938-100	7.23	—	—	Phenolic	3 x 1 1/4	250	Plain	3 3/4	00
WC-2927-200	5.40	WC-2927-210	6.35	Polyolefin	4 x 1 1/4	255	Plain	4 1 1/16	00
WC-2927-220	5.27	—	—	Polyolefin	4 x 1 1/4	255	Plain	4 1 1/16	00
WC-2909-400	7.99	WC-2909-380	8.90	Hard Rubber	5 x 1 1/4	280	Delrin	5 5/8	00
—	—	WC-2927-230	7.60	Polyolefin	5 x 1 1/4	280	Plain	5 5/8	00
WC-2904-190	9.71	—	—	Soft Rubber	5 x 1 1/4	190	Delrin	5 5/8	98
WC-2909-420	8.32	—	—	Hard Rubber	5 x 1 1/4	280	Delrin	5 5/8	97
WC-3286-10	6.57	—	—	Polypropylene	5 x 1 5/16	135	Plain	6 1/16	T30
WC-3286-20	7.34	—	—	TPR Rubber	5 x 1 5/16	135	Plain	6 1/16	—

**Industrial Casters**  
**Light Duty**  
**Applications: 100-135 Lbs.**



Plate Specifications	
Plate Type 00	
Overall Size	2 3/4 x 3 3/4
Hole Spacing	1 3/4 x 3
Hole Dia.	1 1/2
Bolt Dia.	5/16

Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish. Available in swivel plate and swivel plate with brakes. 1" wheel tread width.

Swivel w/ Brake		Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each						
WC-2604-140	6.68	WC-2604-100	5.66	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/16	00
—	—	—	—	WC-1604-100	4.31	Soft Rubber	3 x 1	100	Delrin	3 13/16	00
WC-2609-110	6.30	WC-2609-100	5.28	—	—	Hard Rubber	3 x 1	125	Delrin	3 3/16	00
—	—	WC-2627-110	7.05	—	—	Polyolefin	3 x 1	125	Plain	3 3/4	00
—	—	WC-2626-100	7.19	—	—	TPR Rubber	4 x 1	135	Plain	4 13/16	00

**Small Single Wheel Furniture Casters**  
**Light Duty**  
**Applications: 75-115 Lbs.**




Plate Specifications	
Plate Type 92	
Overall Size	1 3/4 x 2
Hole Spacing	1 3/16 x 1 1/16
Hole Dia.	1 3/64
Bolt Dia.	1/4

Item No.	Wheel Dia. x Width	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
WC-383	2 x 1 3/16	Hard Rubber	Chrome	100	2 5/8	7.73
WC-412	2 x 1 3/16	Soft Rubber	Nickel	75	2 5/8	7.75



PLATE CASTERS

Wheel Type Description			
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.	Polyolefin	— Black molded polyolefin.

**Furniture Casters**  
**Light Duty**  
**Applications: 75-100 Lbs.**




Plate Specifications		
Plate Type	92	93
Overall Size	1 3/16 x 2	1 29/32 x 2 5/8
Hole Spacing	1 3/16 x 1 1/16	1 5/16 x 2 1/8
Hole Dia.	1/4	9/32
Bolt Dia.	#10 Screw	1/4

Double row swivel construction. 1/4" diameter rivet axle. Zinc plated finish. Available in swivel plate and swivel plate with brake.

Swivel		Swivel w/ Brake		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each						
WC-9427-30	2.31	—	—	Polyolefin	2 x 3/4	100	Plain	2 5/8	92
WC-9427-35	2.18	—	—	Polyolefin	2 x 3/4	100	Plain	2 5/8	93
WC-9426-10	2.50	WC-9426-20	3.14	TPR Rubber	2 x 1 3/16	75	Plain	2 5/8	92
WC-9409-10	2.63	—	—	Hard Rubber	2 x 1 3/16	100	Delrin	2 5/8	93
WC-9427-25	2.29	—	—	Polyolefin	2 x 3/4	100	Plain	2 5/8	92
WC-9404-55	6.50	WC-9404-60	7.74	Soft Rubber	2 1/2 x 1 1/16	90	Delrin	2 5/8	92

**Furniture Casters - Low Profile Rigid**  
**Light Duty**  
**Applications: 60-75 Lbs.**



**Furniture Caster - Low Profile Utility**  
**Light Duty**  
**Applications: 20 Lbs.**



Rigid

1/4" diameter rivet axle. Zinc plated finish. Recommended for day beds, studio couches and camper door guard applications.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Mounting Plate	Price Each
WC-9427-45	Polyolefin	2 x 3/4	75	Delrin	2 1/16	1 13/16 x 1 7/16	1.54



Swivel




Plate Specifications	
Plate Type	T1
Overall Size	1 3/16 X 1 1/4
Hole Spacing	1 3/16 X 1 3/8
Hole Dia.	3/16


Top ball bearing raceway. 1/4" diameter rivet axle. Zinc plated finish. Recommended for light home furniture, humidifiers, canister vacuums and planter dollies.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type	Price Each
WC-9227-10	Polyolefin	1 1/4 x 1/2	20	Plain	1 7/16	T1	0.56

**Light - Medium Duty**  
**Applications: 125-280 Lbs.**



Swivel Threaded Stem



Friction Ring Stem Threaded Stem

Item No.	D	L	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH	Price Each
<b>Friction Ring Stem</b>							
WC-121	3/16	1 3/8	3 x 1 1/4	Soft Rubber	125	3 3/8	8.61
WC-124	3/16	1 3/8	4 x 1 1/4	Polyolefin	210	3 3/8	7.67
WC-125	3/16	1 3/8	4 x 1 1/4	Polyolefin	255	4 1/2	9.51
WC-126	3/16	1 3/8	5 x 1 1/4	Polyolefin	280	5 1/2	10.02
<b>Threaded Stem</b>							
WC-127	3/8-16	1 1/2	3 x 1 1/4	Soft Rubber	125	3 3/8	8.93
WC-128	3/8-16	1 1/2	4 x 1 1/4	Soft Rubber	165	4 1/2	9.53
WC-130	1/2-13	1 1/2	3 x 1 1/4	Soft Rubber	125	3 3/8	8.75
WC-131	1/2-13	1 1/2	4 x 1 1/4	Soft Rubber	165	4 1/2	10.11
WC-133	3/8-16	1 1/2	3 x 1 1/4	Polyolefin	210	3 3/8	10.56
WC-134	3/8-16	1 1/2	4 x 1 1/4	Polyolefin	255	4 1/2	10.15
WC-135	3/8-16	1 1/2	5 x 1 1/4	Polyolefin	280	5 1/2	9.60
WC-136	1/2-13	1 1/2	3 x 1 1/4	Polyolefin	210	3 3/8	9.01
WC-137	1/2-13	1 1/2	4 x 1 1/4	Polyolefin	255	4 1/2	8.75
WC-138	1/2-13	1 1/2	5 x 1 1/4	Polyolefin	280	5 1/2	10.72
WC-140				Brake Kit			4.67

STEM CASTERS

Buy One or Buy Bulk & **SAVE!**

Wheel Type Description			
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.	Polyolefin	— Black molded polyolefin.
Polypropylene	— Black molded Polypropylene.		

**Industrial Casters**  
Light-Medium Duty  
Applications: 125-280 Lbs.




Swivel Threaded Stem


Swivel w/ Brake Threaded Stem

Swivel w/ Brake Friction Ring Stem

Swivel Friction Ring Stem



Friction Ring Stem



Threaded Stem

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish.

Swivel w/ Brake		Swivel		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>										
WC-2926-130	6.18	—	—	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/8	7/16	1 3/8
—	—	WC-2909-260	5.04	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/8	7/16	1 29/32
—	—	WC-2904-170	6.99	Soft Rubber	4 x 1 1/4	165	Delrin	4 1/2	1 3/16	1 3/4
<b>Threaded Stem</b>										
—	—	WC-2904-130	4.16	Soft Rubber	3 x 1 1/4	125	Delrin	2 3/8	3/8	1
—	—	WC-2904-140	5.35	Soft Rubber	3 x 1 1/4	125	Delrin	2 3/8	1/2	2 1/2
WC-2926-140	5.64	WC-2926-110	4.88	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/8	3/8	1
WC-2926-150	5.74	WC-2926-120	4.98	TPR Rubber	3 x 1 1/4	210	Delrin	3 3/8	1/2	1
WC-2927-150	4.27	WC-2927-140	3.98	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	3/8	1
WC-2927-160	4.47	—	—	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	1/2	3/4
—	—	WC-2927-170	3.54	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	1/2	1 1/2
—	—	WC-2909-240	4.54	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/8	3/8	1
—	—	WC-2909-280	4.56	Hard Rubber	3 x 1 1/4	210	Delrin	3 3/8	1/2	1 1/2
—	—	WC-2927-180	22.51	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	1/2	1 1/2
—	—	WC-2927-190	4.31	Polyolefin	3 x 1 1/4	210	Plain	3 3/8	3/8	1 1/2
WC-2904-180	6.30	—	—	Soft Rubber	4 x 1 1/4	165	Delrin	4 1/2	3/8	1
—	—	WC-2904-160	5.73	Soft Rubber	4 x 1 1/4	165	Delrin	4 1/2	1/2	3/4
WC-2909-320	6.56	—	—	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	1/2	1
—	—	WC-2909-300	28.22	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	1/2	3/4
WC-2909-340	6.56	—	—	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	1/2	1 1/2
—	—	WC-2909-360	5.70	Hard Rubber	4 x 1 1/4	255	Delrin	4 1/2	3/8	1
WC-2925-110	6.82	—	—	TPR Rubber	4 x 1 1/4	275	Delrin	4 1/2	1/2	1
WC-2926-170	6.26	WC-2926-160	5.74	TPR Rubber	4 x 1 1/4	275	Delrin	4 1/2	3/8	1
—	—	WC-2927-240	5.74	Polyolefin	5 x 1 1/4	280	Plain	5 1/2	7/16	3/8

200+ BRANDS  
**ONE SOURCE**

We Have The Leading Products And Brands You Trust In.

Knobs, Handles & Grips



Clamps & Workholding



Tooling & Positioning Components



Feet, Casters & Glides



Cutting & Machining



STEM CASTERS

Wheel Type Description			
Phenolic	— Black phenolic resin reinforced with macerated fabric for high capacity.	Nylon	— Solid nylon wheel.
Soft Rubber	— Black soft rubber tread molded to black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.	Polyolefin	— Black molded polyolefin.

**Low Profile  
Medium Duty  
Applications: 150-500 Lbs.**



**Swivel w/ Brake  
Friction Ring Stem**




**Swivel  
Threaded Stem**




**Swivel w/ Brake  
Threaded Stem**

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish. 1 3/16" dual to 1 13/16" wheel tread width.

Swivel w/ Brake		Swivel		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>										
WC-1509-100	12.43	—	—	Hard Rubber	2 x 1 3/16	150	Delrin	2 3/4	7/16	1 3/8
—	—	WC-1509-120	8.10	Hard Rubber	2 x 1 3/16	200	Delrin	2 3/4	7/16	1 3/8
<b>Threaded Stem</b>										
—	—	WC-1509-160	8.59	Hard Rubber	2 1/2 x 1 3/16	300	Delrin	3 3/8	1/2	3/4
WC-1509-110	11.84	—	—	Hard Rubber	2 x 1 3/16	150	Delrin	2 3/4	1/2	1 1/2
WC-1509-190	10.52	WC-1509-200	8.85	Hard Rubber	3 x 1 3/16	350	Delrin	3 3/4	1/2	1 1/2
WC-1504-110	10.43	WC-1504-100	8.64	Soft Rubber	3 x 1 3/16	250	Delrin	3 3/4	9/16	1 1/2
WC-1527-140	8.35	—	—	Polyolefin	3 x 1 3/4	350	Sintered	3 3/4	1/2	3/4
WC-1527-150	12.96	—	—	Polyolefin	3 x 1 3/4	350	Sintered	3 3/4	1/2	3/4
—	—	WC-1538-130	11.98	Phenolic Resin	3 x 1 13/16	500	Roller	3 3/4	1/2	1 1/2



**Friction Ring Stem**



**Threaded Stem**

**Dual Wheel Swivel Caster  
Medium Duty  
Applications: 220 Lbs.**



Hollow kingpin 12mm.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Price Each
WC-D586-10	TPR Rubber	3 x 1	220	Plain	4	17.05

**Low Profile Casters  
Medium Duty  
Applications: 200-350 Lbs.**




Available in swivel casters with hard rubber and phenolic treads and threaded stems. Selected casters have a thumb-screw brake.

Stem Specifications		
Stem Type	10	18
Stem Size x Lgth.	1/2-13 x 1 1/2	Leveling Stem 1/2-13 x 2 1/2

Item No.	Wheel Dia. x Width	Wheel Type	Stem Type	Capacity (Lbs.)	OAH	Price Each
WC-299*	2 x 1 3/16	Hard Rubber	18	200	2 3/4	14.98
WC-301*	2 x 1 3/16	Hard Rubber	10	200	2 3/4	14.17
WC-300*	3 x 1 3/4	Phenolic	18	350	3 3/4	19.26
WC-302	3 x 1 3/16	Hard Rubber	10	350	3 3/4	14.55

\* Thumbscrew brake

**Tandem Appliance Caster  
Medium Duty  
Application: 250 Lbs.**



Tandem wheels provide support for heavy appliances or furniture. Zinc plated finish. Wheels are white nylon.

Item No.	Wheel Dia.	Wheel Type	Capacity (Lbs.)	OAH	D	L	Price Each
WC-8055-10	.835	Nylon	250	2.15	5/16	7/8	9.94

**Scaffolding Casters  
Applications: 240 Lbs.**



Double row swivel construction. Zinc plated finish. Caster has total-lock brake. The stem is 1 1/4" x 4" square with a 7/16" hole located 2 1/2" up. Fits standard scaffolding structures.



Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Stem Diameter (Squared)	Stem Length	Price Each
WC-1904-120	Soft Rubber	5 x 1 1/4	240	Plain	6 3/8	1 1/4	4	25.47

STEM CASTERS

Buy One or Buy Bulk & SAVE!


Wheel Type Description			
Soft Rubber	—	Black soft rubber tread molded to black hard rubber core.	TPR Rubber — Thermoplastic non-marking rubber tread on a polyolefin core.
Polyolefin	—	Black molded polyolefin.	

**Industrial Casters**  
**Light Duty**  
**Applications: 100-145 Lbs.**


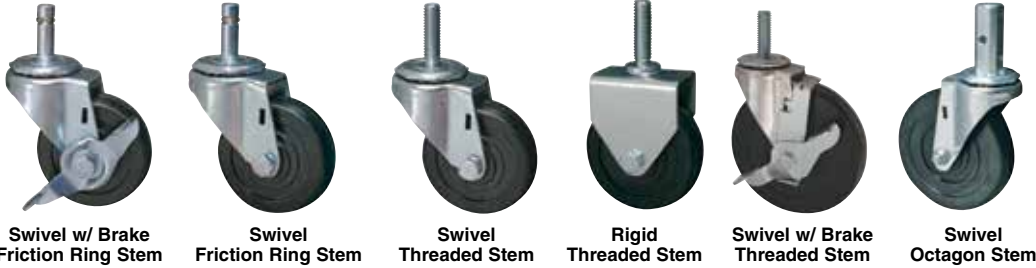


Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish. 1" wheel tread width.

Swivel w/ Brake		Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>												
WC-2604-150	6.97	WC-2604-120	6.09	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	7/16	1 3/8
WC-2604-160	6.95	—	—	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	7/16	1 3/8
—	—	WC-2604-170	7.79	—	—	Soft Rubber	4 x 1	115	Delrin	4 1 1/16	7/16	1 29/32
—	—	WC-2609-120	8.96	—	—	Soft Rubber	5 x 1	145	Delrin	5 1 1/16	19/16	1 3/4
<b>Threaded Stem</b>												
—	—	WC-2604-130	5.36	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	3/8	1
—	—	WC-2604-110	5.52	—	—	Soft Rubber	3 x 1	100	Delrin	3 3/4	7/16	1 1/2
—	—	—	—	WC-1604-110	6.18	Soft Rubber	3 x 1	100	Delrin	3 1 3/4	7/16	1 1/2
—	—	WC-2627-100	4.63	—	—	Polyolefin	3 x 1	125	Plain	3 3/4	7/16	1 1/2
WC-2604-200	9.11	WC-2604-190	7.78	—	—	Soft Rubber	5 x 1	125	Delrin	5 1 1/16	1/2	1 1/2
<b>Octagon Stem</b>												
—	—	WC-2686-100	14.76	—	—	Soft Rubber	4 x 1	115	Delrin	4 1 1/16	3/4	2




**Furniture Casters**  
**Light Duty**  
**Applications: 75-100 Lbs.**




Double row swivel construction. 1/4" diameter rivet axle. Zinc plated finish.

Swivel		Swivel w/ Brake		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L
Item No.	Price Each	Item No.	Price Each							
<b>Friction Ring Stem</b>										
WC-9404-20	6.39	—	—	Soft Rubber	2 x 1 3/16	75	Delrin	2 1/2	7/16	1 3/8
WC-9404-35	6.68	—	—	Soft Rubber	2 1/2 x 1 3/16	90	Delrin	2 1/2	7/16	1 3/8
WC-9404-65	6.82	WC-9404-75	8.21	Soft Rubber	3 x 1 3/16	100	Delrin	3 9/16	7/16	1 3/8
—	—	WC-9404-80	9.10	Soft Rubber	3 x 1 3/16	100	Delrin	3 9/16	7/16	1 29/32
<b>Grip Neck Stem</b>										
WC-9427-40	5.93	—	—	Polyolefin	2 x 3/4	100	Plain	2 1/2	5/16	1 9/16
WC-9404-70	6.90	—	—	Soft Rubber	3 x 1 3/16	100	Delrin	3 9/16	5/16	1 9/16
—	—	WC-9404-50	8.04	Soft Rubber	2 x 1 3/16	75	Delrin	2 5/8	—	—
—	—	WC-9404-90	8.26	Soft Rubber	3 x 1 3/16	100	Delrin	3 9/16	5/16	1 9/16
<b>Threaded Stem</b>										
—	—	WC-9427-20	6.99	Polyolefin	2 x 3/4	100	Plain	2 1/2	5/16	1
WC-9404-30	8.02	—	—	Soft Rubber	2 x 1 3/16	75	Delrin	2 1/2	3/8	1 1/2
WC-9404-25	6.80	—	—	Soft Rubber	2 x 1 3/16	75	Delrin	2 1/2	5/16	1
WC-9426-30	6.51	—	—	TPR Rubber	2 x 1 3/16	75	Plain	2 1/2	5/16	3/4
WC-9409-20	6.82	—	—	Soft Rubber	2 x 1 3/16	100	Delrin	2 1/2	3/8	1 1/2
WC-9404-40	6.95	—	—	Soft Rubber	2 1/2 x 1 3/16	90	Delrin	2 1/2	3/8	3/4
—	—	WC-9404-45	7.09	Soft Rubber	2 1/2 x 1 3/16	90	Delrin	2 1/2	3/16	1
—	—	WC-9404-85	7.32	Soft Rubber	3 x 1 3/16	100	Delrin	3 9/16	3/8	1



Wheel Type Description					
Soft Rubber	—	Black soft rubber tread molded to black hard rubber core.	Hard Rubber	—	Black hard rubber tread molded to black hard rubber core.
Polyolefin	—	Black molded polyolefin.			

**Light Duty**  
Applications: 100-145 Lbs.




Double row swivel construction. 5/16" diameter nut and bolt axle. Zinc plated finish. Heat treated and factory lubricated swivel raceways. Brake kit WC-140 sold separately.

Threaded Stem

Item No.	D	L	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH	Price Each
WC-109	3/8-16	1 1/2	3 x 1	Soft	100	3 3/8	7.91
WC-110	3/8-16	1 1/2	4 x 1	Soft	115	4 1/16	9.86
WC-113	1/2-13	1 1/2	4 x 1	Soft	115	4 1/16	8.69
WC-114	1/2-13	1 1/2	5 x 1	Soft	125	5 1/16	10.83
WC-115	3/8-16	1 1/2	3 x 1	Polyolefin	125	3 3/8	7.12
WC-116	3/8-16	1 1/2	4 x 1	Polyolefin	140	4 1/16	8.06
WC-117	3/8-16	1 1/2	5 x 1	Polyolefin	145	5 1/16	9.17
WC-118	1/2-13	1 1/2	3 x 1	Polyolefin	125	3 3/8	6.26
WC-119	1/2-13	1 1/2	4 x 1	Polyolefin	140	4 1/16	7.77
WC-120	1/2-13	1 1/2	5 x 1	Polyolefin	145	5 1/16	8.90
WC-140	Brake Kit						

**Roller Caster**  
Light Duty  
Applications: 90 Lbs.



Friction Ring Stem

Furniture, cabinets and small appliances caster.

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L	Price Each
WC-H086-10	Polyolefin	2 1/2 x 1 3/16	90	Plain	2 13/16	7/16	1 3/4	2.24

**RSOC Series**  
Round Plastic Caster Sockets




- Specifications:
- Material: Polyethylene
  - Color: Gray

- Features:
- Heavy-duty open top
  - Round with flutes
  - Can be used with any stem length


Item No.	Stem Size In	To Fit Tube Size In	Tube Gauge	Pack Qty.	Price Each
RSOC1000A	7/16 x 7/8	FRS	1.000	16	1000 3.01
RSOC1100A	7/16 x 7/8	FRS	1.000	18	1000 3.01

**Threaded Stems**  
Light Duty  
Applications: 75-125 Lbs.



Item No.	D	L	Wheel Dia. x Width	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
WC-382	5/16-18	1	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.92
WC-415	5/16-18	1	2 x 1 3/16	Soft Rubber	Chrome	75	2 1/2	7.94
WC-372	3/8-16	1	2 x 1 3/16	Soft Rubber	Chrome	75	2 1/2	7.90
WC-373	3/8-16	1	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.90
WC-374	3/8-16	1 1/2	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.46
WC-384	3/8-16	1 1/2	2 1/2 x 1 3/16	Soft Rubber	Chrome	90	3 1/16	8.07
WC-386	3/8-16	1 1/2	2 1/2 x 1 3/16	Hard Rubber	Chrome	115	3 1/16	8.11
WC-376	3/8-16	1	3 x 1 3/16	Soft Rubber	Chrome	100	3 3/16	7.84
WC-379	3/8-16	1	3 x 1 3/16	Hard Rubber	Chrome	125	3 3/16	7.82
WC-385	3/8-16	1 1/2	3 x 1 3/16	Soft Rubber	Chrome	100	3 3/16	7.88
WC-387	3/8-16	1 1/2	3 x 1 3/16	Hard Rubber	Chrome	125	3 3/16	7.84
WC-368	1/2-13	1 1/2	2 x 1 3/16	Polyolefin	Zinc	100	2 1/2	6.27
WC-369	1/2-13	1 1/2	2 x 1 3/16	Soft Rubber	Zinc	75	2 1/2	6.90

**Friction Ring**  
Light Duty  
Applications: 75-125 Lbs.



Item No.	D	L	Wheel Dia. x Width	Wheel Type	Finish	Capacity (Lbs.)	OAH	Price Each
WC-388	7/16	1	2 x 1 3/16	Soft Rubber	Chrome	75	2 1/2	7.75
WC-402	7/16	1 3/8	2 x 1 3/16	Soft Rubber	Nickel	75	2 1/2	5.13
WC-370	7/16	1 3/8	2 x 1 3/16	Soft Rubber	Zinc	75	2 1/2	6.65
WC-371	7/16	1 3/8	2 x 1 3/16	Polyolefin	Zinc	100	2 1/2	6.32
WC-380	7/16	1 3/8	2 x 1 3/16	Hard Rubber	Chrome	100	2 1/2	7.94
WC-393	7/16	7/8	2 1/2 x 1 3/16	Soft Rubber	Nickel	90	3 1/16	6.15
WC-391	7/16	1 3/8	2 1/2 x 1 3/16	Soft Rubber	Nickel	90	3 1/16	5.86
WC-375	7/16	1 3/8	3 x 1 3/16	Soft Rubber	Chrome	100	3 3/16	7.84
WC-377	7/16	1 3/8	3 x 1 3/16	Hard Rubber	Chrome	125	3 3/16	7.88

**SSOC Series**  
Square Plastic Caster Sockets

- Specifications:
- Material: Linear Polyethylene
  - Color: Natural

- Features:
- Top bearing



Item No.	Stem Size In	To Fit Tube Size In	Tube Gauge	Pack Qty.	Price Each
SSOC1000A	#2 Gripneck Stem		1.000	18	1600 2.22
SSOC1100A	7/16 x 7/8	FRS	1.000	18	1600 2.37

CASTERS SETS & ACCESSORIES

Buy One or Buy Bulk & SAVE!

Wheel Type Description

Hard Rubber — Black hard rubber tread molded to black hard rubber core. Polypropylene — Black molded Polypropylene.

Caster Sets

Medium Duty


Applications: 300-400 Lbs.



Swivel Threaded Stem



Rigid Plate



Threaded Stem

Double row swivel construction. 3/8" diameter nut and bolt axle. Zinc plated finish. Available in threaded stem and plate. 1 3/8" to 1 3/4" wheel tread width.






Plate Specifications	
Plate Type 00	
Overall Size	2 3/4 x 3 3/4
Hole Spacing	1 1/4 x 3
Hole Dia.	1 1/32
Bolt Dia.	5/16

Swivel		Rigid		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	D	L	Plate Type
Item No.	Price Each	Item No.	Price Each								
<b>Threaded Stem</b>											
WC-1227-170	39.47	—	—	Polypropylene	5 x 1 3/8	400	Delrin	5 7/8	1/2	3/4	—
<b>Plate</b>											
—	—	WC-1509-170	49.65	Hard Rubber	2 1/2 x 1 3/4	300	Delrin	3 1/2	—	—	00



Winged Brackets



Type 1



Type 2



ERWagner  
CASTERS & WHEELS Manufacturing Co.

Weldable metal socket for 90 degree corner. Used with 7/16" friction ring stems.

Item No.	1	A	B	C	Angle	Price Each
WC-WP77-10	1	1.562	1.500	.440 - .455	90	0.91
WC-W386-10	2	1.607	1.250	.440 - .455	90	0.89
WC-HP77-20	3	—	—	—	180	0.91

Round and Square Caster Sockets

ERWagner  
CASTERS & WHEELS Manufacturing Co.



Type 1



Type 5



Type 2



Type 6



Type 3



Type 7



Type 4



Type 8

Item No.	Type	Color	Tube OD	Tube Gauge	Hole Diameter	For Stem Type	Stem Diameter	Style	Socket Material	Price Each
<b>For Round Tubes</b>										
WC-SP77-240	7	Natural	1	16	—	Round	7/16	Top	Steel	0.54
WC-SP77-170	4	Black	1 1/4	18	—	Grip	5/16	Top	Polyolefin	0.14
<b>For Square Tubes</b>										
WC-SP77-160	3	Black	3/4	18	—	Grip	5/16	Top	Polyolefin	0.15
WC-SP77-180	3	Natural	3/4	20	—	Grip	5/16	Top	Polyolefin	0.16
WC-SP77-210	3	Natural	1	16	—	Grip	5/16	Top	Polyolefin	0.13
WC-SP77-140	3	Natural	1	18	—	Friction	3/8	Top	Polyolefin	0.32
WC-SP77-200	3	Black	1	18	—	Grip	5/16	Top	Polyolefin	0.16
WC-SP77-220	3	Black	1	18	—	Grip	5/16	Top	Polyolefin	0.14
WC-SP77-280	4	Natural	1	18	—	Friction	7/16	Top	Polyolefin	0.72
<b>For Straight Holes</b>										
WC-SP77-230	1	Natural	—	—	3/8	Grip	5/16	Open	Steel	0.17
WC-SP77-310	5	Natural	—	—	3/8	Grip	5/16	Top	Steel	0.40
WC-SP77-100	2	Brown	—	—	1/2	Grip	3/8	Top	Polyolefin	0.07
WC-SP77-110	2	Natural	—	—	1/2	Grip	3/8	Top	Polyolefin	0.16
WC-SP77-250	7	Natural	—	—	9/16	Friction	7/16	Top	Steel	0.69
WC-SP77-270	2	Natural	—	—	9/16	Friction	7/16	Top	Polyolefin	0.16
WC-SP77-290	8	Natural	—	—	9/16	Friction	7/16	Top	Steel	0.73
WC-SP77-260	2	Natural	—	—	5/8	Friction	7/16	Top	Polyolefin	0.12
<b>Socket</b>										
WC-SP77-150	6	Black	1 1/8	—	1 1/2	—	—	Top	Polyolefin	0.48

HEAVY DUTY PLATE CASTERS

Wheel Type Description			
Cast Iron	— Toughened with steel, high load rating and long wear life.	Urethane on Aluminum	— Molded and mechanically locked to aluminum core.
Rubber on Aluminum	— Rubber tread permanently bonded to aluminum core.	Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.

**Truck Casters**  
**Heavy Duty**  
**Applications: 350-1200 Lbs.**



Swivel



Swivel with Total-Lock



Rigid




Plate Specifications	
Plate Type 90	
Overall Size	4 x 4 <sup>5/8</sup>
Hole Spacing	2 <sup>5/8</sup> x 3 <sup>3/8</sup> to 3 x 3
Hole Dia.	5/8 x 3/4 Slots
Bolt Dia.	3/8

Swivel casters have top raceway grease seal and yellow zinc chromate finish for better corrosion resistance. Total-lock locks both wheel and swivel simultaneously.

Swivel w/ Total-Lock		Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-305	58.28	WC-303	54.13	WC-304	33.84	5 x 2	Rubber on Aluminum	350	6 <sup>1/2</sup>
WC-314	66.54	WC-312	57.51	WC-313	34.26	5 x 2	Urethane on Aluminum	1,050	6 <sup>1/2</sup>
WC-323	53.01	WC-321	40.15	WC-322	21.42	5 x 2	Phenolic	1,000	6 <sup>1/2</sup>
WC-308	57.99	WC-306	46.83	WC-307	35.12	6 x 2	Rubber on Aluminum	410	7 <sup>1/2</sup>
WC-317	72.17	—	—	WC-316	40.37	6 x 2	Urethane on Aluminum	1,200	7 <sup>1/2</sup>
WC-326	49.42	WC-324	34.94	WC-325	21.32	6 x 2	Phenolic	1,200	7 <sup>1/2</sup>
WC-311	70.13	WC-309	58.27	WC-310	46.64	8 x 2	Rubber on Aluminum	500	9 <sup>1/2</sup>
WC-320	78.03	WC-318	64.53	WC-319	50.46	8 x 2	Urethane on Aluminum	1,200	9 <sup>1/2</sup>
WC-329	60.89	WC-327	39.03	WC-328	25.15	8 x 2	Phenolic	1,200	9 <sup>1/2</sup>

**Kingpinless Casters**  
**Heavy Duty**  
**Applications: 1,600-2,000 Lbs.**



Rigid with Phenolic Wheel



Swivel with Phenolic Wheel




Plate Specifications	
Plate Type AY	
Overall Size	4 <sup>1/2</sup> x 6 <sup>5/16</sup>
Hole Spacing	2 <sup>1/16</sup> x 4 <sup>15/16</sup> Slotted to 3 <sup>3/8</sup> x 5 <sup>1/4</sup>
Bolt Dia.	1/2

Used when superior swivel action is needed.

Rigid		Swivel		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
WC-337	49.16	—	—	6 x 2 <sup>1/2</sup>	Phenolic	1,600	7 <sup>1/2</sup>
WC-349	60.70	WC-348	128.70	6 x 2 <sup>1/2</sup>	Cast Iron	2,000	7 <sup>1/2</sup>
WC-339	58.60	WC-338	83.70	8 x 2 <sup>1/2</sup>	Phenolic	2,000	10 <sup>1/8</sup>
WC-351	70.10	WC-350	95.20	8 x 2 <sup>1/2</sup>	Cast Iron	2,000	10 <sup>1/8</sup>
WC-347	102.50	WC-346	125.96	10 x 2 <sup>1/2</sup>	Urethane on Cast Iron	2,000	11 <sup>1/2</sup>
WC-353	97.30	WC-352	121.30	10 x 2 <sup>1/2</sup>	Cast Iron	2,000	11 <sup>1/2</sup>

**HEAVY DUTY PLATE CASTERS & WHEELS**

**Buy One or Buy Bulk & SAVE!**

Wheel Type Description			
Pneumatic	— Air filled tube tire.	Phenolic	— Phenolic resin reinforced with macerated fabric for high capacity.
Soft Rubber	— Black soft rubber tread molded to a black hard rubber core.	Hard Rubber	— Black hard rubber tread molded to a black hard rubber core.
TPR Rubber	— Thermoplastic non-marking rubber tread on a polyolefin core.		

**Pneumatic Medium-Heavy Duty Applications: 200-350 Lbs.**

Available in swivel, swivel with total-lock, and rigid in the 6" size. Swivel, swivel with strap brake and rigid in 8" size. Swivel and rigid in 10" size. Gray tread color for non-marking feature. Ball wheel bearings.




Swivel with Brake



Swivel




Rigid



Swivel w/Brake		Swivel		Rigid		Wheel Dia. x Width	Plate Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each	Item No.	Price Each				
WC-356*	52.30	WC-354	43.58	WC-355	35.39	6 x 2	AR	200	7 1/2
WC-359*	53.13	WC-357	44.41	WC-358	36.28	6 x 2	90	200	7 1/2
WC-362**	68.40	WC-360	50.00	WC-361	48.12	8 x 2.80/2.50-4	90	300	9 1/16
—	—	WC-363	59.14	WC-364	56.71	10 x 4.10/3.10-4	90	350	11 1/16

Plate Specifications		
Plate Type	AR	90
Overall Size	2 3/4 x 3 3/4	4 x 4 5/8
Hole Spacing	1 1/4 x 2 1/8 to 3	2 5/8 x 3 3/8 to 3 x 3
Hole Dia.	1 1/32 x 1 1/32 Slots	3/8 x 3/4 Slots
Bolt Dia.	5/16	3/8



\*Total-lock brake  
\*\*Strap brake

**Duratex Wheels Medium-Heavy Duty Applications: 500 Lbs.**



Duratex wheels are made from a black phenolic resin. They are recommended for medium to heavy loads on carpeted and hard surfaced floors. They provide good protection to floors and are quieter than steel wheels. Recommended operating temperature range is -45° F to 300° F. Tread hardness is 102 Shore E.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1338-02	3 x 1 1/2	Phenolic Resin	500	1 1/8	3/8	Roller	9.08
WC-1338-04	3 x 1 3/4	Phenolic Resin	500	1 1/8	3/8	Roller	6.06

**All-Hard Rubber Wheels Light-Heavy Duty Applications: 100-400 Lbs.**



All-hard rubber tread material consists of a black hard rubber molded to a black hard rubber core. Used for light to heavy loads on carpeted or hard surfaced floors. These wheels roll with ease, are non-sparking and resistant to water, oil and most acids. Recommended operating temperature range is -20° F to 125° F. Tread hardness is 70-85 Shore D.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1309-05	2 x 1 1/16	Hard Rubber	100	1 1/16	3/8	Delrin	0.63
WC-1309-10	2 1/2 x 1 1/8	Hard Rubber	175	1 1/4	3/8	Sintered	1.49
WC-1309-15	2 1/2 x 1 3/16	Hard Rubber	115	1 1/8	1/4	Delrin	1.08
WC-1309-20	3 x 1	Hard Rubber	125	1 1/8	3/8	Delrin	1.20
WC-1309-25	3 x 1 1/16	Hard Rubber	125	1 1/8	1/4	Delrin	1.27
WC-1309-30	3 1/2 x 1 1/4	Hard Rubber	250	1 1/2	3/8	Delrin	2.81
WC-1309-40	6 x 1 1/8	Hard Rubber	400	1 1/2	3/8	Delrin	8.19
WC-1304-55	6 x 1 1/8	Hard Rubber	400	1 1/2	3/8	Delrin	9.44

**All-Rubber Wheels Light-Medium Duty Applications: 75-200 Lbs.**



All-rubber wheels are made of a black soft rubber molded to a black hard rubber core. They are recommended for light to medium loads on hard surfaced floors. Along with a quiet operation it also provides a cushioned ride absorbing shock and vibration. Recommended operating temperature range is -20° F to 125° F. Tread hardness is 70-85 Shore A.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1304-20	2 1/2 x 1 3/16	Soft Rubber	90	1 1/16	1/4	Delrin	1.09
WC-1304-10	2 1/2 x 1 1/8	Soft Rubber	120	1 27/64	5/16	Delrin	1.54
WC-1304-25	3 x 1	Soft Rubber	100	1 1/8	5/16	Delrin	2.18
WC-1304-35	3 x 1 1/4	Soft Rubber	125	1 27/64	5/16	Delrin	1.49
WC-1304-40	3 x 1 1/4	Soft Rubber	125	1 27/64	5/16	Sintered	2.70
WC-1304-45	4 x 1	Soft Rubber	75	1 1/8	5/16	Delrin	2.49
WC-1386-30	4 x 1	Soft Rubber	115	1 1/8	3/8	Delrin	2.81
WC-1304-50	4 x 1 1/8	Soft Rubber	200	1 1/2	3/8	Delrin	3.31
WC-1386-40	5 x 1	Soft Rubber	125	1 1/8	5/16	Sintered	5.37

**TPR Rubber Wheels Light-Medium Duty Applications: 275-300 Lbs.**



TPR rubber wheels consist of a dark gray thermoplastic rubber molded to a gray polyolefin core. They roll easily, quietly and provide excellent floor protection. They are recommended for light to medium loads on carpeted and hard surfaced floors. Recommended temperature range is -40° F to 180° F. Tread hardness 65-75 Shore A.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1326-10	4 x 1 1/4	TPR Rubber	275	1 1/2	3/8	Delrin	3.11
WC-1326-20	5 x 1 1/2	TPR Rubber	300	1 1/2	3/8	Delrin	3.91
WC-1326-30	5 x 1 1/4	TPR Rubber	300	1 1/2	3/8	Delrin	3.73



Wheel Type Description			
Cast Iron	— Toughened with steel, high load rating and long wear life.	Rubber on Aluminum	— Molded and Mechanically locked to aluminum core.
Polyolefin	— Black molded polyolefin.		

**Durafoam Wheels**  
**Light-Medium Duty**  
**Applications: 50-350 Lbs.**



Dished



Solid

Durafoam wheels have a dished or solid profile. Wheel material is black polyolefin. Requires no bearing which makes them ideal for corrosive applications. They have good floor protection and offer easy rolling. They are recommended for light to heavy loads on carpeted and hard surfaced floors. They are non-marking, resistant to water, oil and most acids and chemicals. Recommended operating temperature range is -20° F to 180° F. Tread hardness is 60-75 Shore D.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-1386-10	1½ x ¼	Polyolefin	50	¾	¼	Plain	0.24
WC-1327-100	2½ x 1¼	Polyolefin	115	1½	¼	Plain	0.43
WC-1327-110	3 x 1¼	Polyolefin	350	1½	5/8	Roller	1.22
WC-1327-120	3 x ¾	Polyolefin	125	1½	¼	Plain	0.55
WC-1327-130*	4 x 1½	Polyolefin	300	1½	5/8	Plain	1.44
WC-H586-20	4 x 1¼	Polyolefin	255	1½	3/8	Plain	0.99

\* Solid Profile

**Mold-On Rubber Wheels**  
**Light-Medium Duty**  
**Application: 500 Lbs.**



Mold-on rubber wheels consist of a soft black rubber tread permanently bonded to an aluminum core. Excellent floor and load protection, quiet operation and absorbs shock and vibration. Recommended for light to medium loads on hard surfaced floors. Recommended operating temperature range is -20° F to 160° F. Tread hardness 70-85 Shore A.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-8386-10	8 x 2	Soft Rubber	500	2¾	½	Roller	30.17

**Semi-Steel Wheels**  
**Heavy Duty**  
**Applications: 1,000-1,200 Lbs.**



Semi-steel wheels are made of cast iron and enriched with steel. Roll easily under heavier loads. Recommended for use on floors that are littered with metal debris and where floor protection and noise are not concerns. Impact resistant and performs well in extreme temperatures. Recommended operating temperature range is -50° F to 500° F.

Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Width	Axle Size	Bearing	Price Each
WC-8311-10	5 x 2	Cast Iron	1,000	2¾	½	Roller	9.67
WC-8311-20	6 x 2	Cast Iron	1,200	2¾	½	Roller	9.67

# TUBE INSERTS








Pages 347 - 357

PLATE CASTERS

Wheel Type Description			
Duro-Tred	— Polyurethane tread permanently vulcanized to a semi-steel or aluminum core. Cushioned ride and long wear under heavy load. Excellent mobility.	Polyflex	— Polyolefin wheel is light weight and impact resistant. Withstands water and chemicals. Non-marking, good mobility.
Dyna-Tred	— Santoprene thermoplastic rubber resists chemicals, high temperatures and wear. Polypropylene hub won't dent, mar or stain.	Rockite	— Hard rubber composition throughout - impervious to oil and greases.
Dyna-Tred Poly	— Polyurethane allows high load capacity and extended wear. Resists chemicals. Polypropylene hub won't dent, mar or stain.	Ruberex	— Composition rubber wheel combines a soft rubber tread with a hard rubber core. Quiet movement and cushioned ride.
K-Wheel	— High strength solid urethane withstands temperatures from -50° to 180° F. Load characteristics of steel. Steam cleanable.	Semi-Steel	— Cast iron toughened with steel. High load rating and long wear life.
Plaskite	— Phenolic compound reinforced with macerated fabric makes a high impact wheel resistant to oil, gas, etc.	Sintered Iron	— Powdered iron, compacted and sintered to cast iron strength. Concentric and smooth tread.
		Vulcanized Rubber	— Cushioned rubber tread permanently vulcanized to semi-steel core.

Bearing Type Description			
Plain	— Wheel bore rides on the spanner bushing or axle. Used for light loads and low movement.	Self-Lubricating	— Oil-impregnated bronze for use where there is moisture or low maintenance is needed.
Roller	— For heavier loads-anti-friction.		

General Duty Applications: 90-450 Lbs.

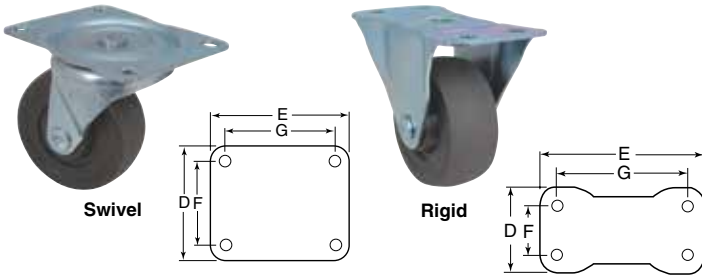


Wheel Size	Swivel		Wheel Size	Rigid	
	D x E	F x G		D x E	F x G
2	1 1/8 x 2 1/16	1 1/16 x 2 1/8	2	1 1/2 x 2 1/2	1 1/16 x 2 1/8
2 1/2	2 1/4 x 3 3/16	1 1/4 x 3	2 1/2	2 1/4 x 4 1/16	1 1/16 x 3 1/2
3	3 1/8 x 4 1/8	2 3/8 x 3 3/8 to 3 1/16	3	2 1/2 x 4 1/16	1 3/16 x 4
4	4 x 5 1/8	3 x 4	4	3 1/8 x 6 1/4	1 3/4 x 5
5	5 1/16 x 5 1/16	3 3/4 x 4 1/2	5	3 1/2 x 7 1/4	1 1/8 x 6

Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
NFC-25082	4.36	NFC-25748	3.98	2 x 1	Ruberex	90	2 1/2
NFC-25086	5.69	—	—	2 x 1	Ruberex	90	2 1/2
NFC-25124	4.40	NFC-25783	4.04	2 x 1	Rockite	150	2 1/2
NFC-25125*	5.25	—	—	2 x 1	Rockite	150	2 1/2
NFC-25083	9.34	NFC-25749	6.41	2 1/2 x 1 1/8	Ruberex	100	3 1/4
NFC-25128	10.05	NFC-25785	6.41	2 1/2 x 1 1/8	Rockite	200	3 1/4
NFC-25091	9.88	NFC-25752	8.85	3 x 1 1/4	Ruberex	175	3 3/16
NFC-25095*	12.84	—	—	3 x 1 1/4	Ruberex	175	3 3/16
NFC-25136	10.33	NFC-25787	9.29	3 x 1 1/4	Rockite	270	3 3/16
NFC-25179	38.98	NFC-25814	26.51	3 x 1 1/4	Plaskite	300	3 3/16
NFC-25049	15.10	—	—	3 x 1 3/16	Sintered-Iron	300	3 3/16
NFC-25149	22.71	NFC-25790	16.21	4 x 1 1/16	Rockite	350	5
NFC-25176*	22.99	—	—	4 x 1 1/16	Rockite	350	5
NFC-25057	27.65	—	—	4 x 1 1/8	Sintered-Iron	450	5

\*With brake

Light Medium Duty 5/16" Mounting Bolt Applications: 175 - 290 Lbs.

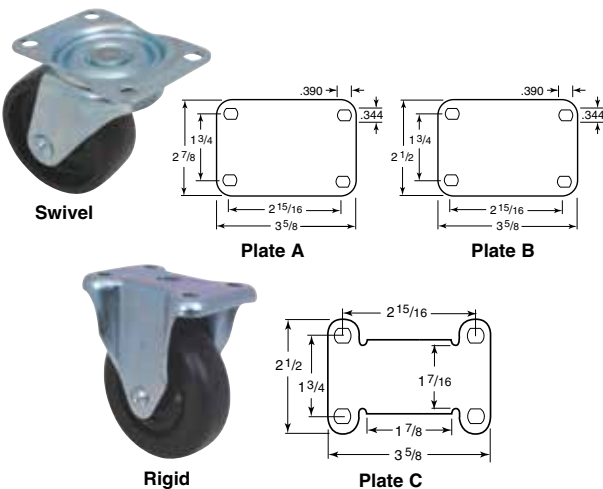

Item No.	Plate Style	Wheel Dia. x Width	Wheel Type	Bearing	Capacity (Lbs.)	OAH	Price Each
<b>Swivel</b>							
NFC-25447	A	2 1/2 x 1 1/8	Rockite	Self-Lube	200	3 3/16	12.69
NFC-24578	A	3 x 1 1/4	Ruberex	Self-Lube	175	3 3/16	13.77
NFC-25451	A	3 x 1 1/4	Rockite	Self-Lube	270	3 3/16	13.63
NFC-25518	A	3 x 1 1/4	Polyflex	Plain	270	3 3/16	10.88
NFC-25510	B	3 1/2 x 1 1/16	Rockite	Self-Lube	275	4 3/4	20.46
NFC-25413	B	4 x 1 1/4	Ruberex	Self-Lube	200	5	19.61
NFC-25460	B	4 x 1 1/4	Rockite	Self-Lube	275	5	19.64
NFC-25475	B	4 x 1 1/4	Polyflex	Plain	275	5	17.74
NFC-25533	B	5 x 1 1/4	Ruberex	Self-Lube	200	6 1/8	22.50
NFC-25467	B	5 x 1 1/4	Rockite	Self-Lube	290	6 1/8	23.50
<b>Rigid</b>							
NFC-25111	C	2 1/2 x 1 1/8	Rockite	Self-Lube	200	3 3/16	11.23
NFC-25113	C	3 x 1 1/4	Ruberex	Self-Lube	175	3 3/16	12.81
NFC-25114	C	3 x 1 1/4	Rockite	Self-Lube	270	3 3/16	10.83
NFC-27280	C	4 x 1 1/4	Ruberex	Self-Lube	200	5	16.21
NFC-25099	C	4 x 1 1/4	Rockite	Self-Lube	275	5	16.46
NFC-25105	C	4 x 1 1/4	Polyflex	Plain	275	5	12.69
NFC-27281	C	5 x 1 1/4	Ruberex	Self-Lube	200	6 1/8	20.46
NFC-25109	C	5 x 1 1/4	Rockite	Self-Lube	290	6 1/8	21.38
NFC-27293	C	5 x 1 1/4	Polyflex	Plain	290	6 1/8	13.31

Note: Roll lock brake kits available for 4" and 5" casters.

PLATE CASTERS & ACCESSORIES

**Caster Wheels**  
Applications: 150-900 Lbs.



Rockite



Plaskite



Item No.	Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	Hub Lgth.	Axle Size	Bearing	Price Each
NFC-42010	2 x 1	Rockite	150	1 1/4	1/4	Self-Lube	1.79
NFC-42011	2 1/2 x 1 1/2	Rockite	200	1 3/8	5/16	Self-Lube	2.47
NFC-42021	3 x 1 1/4	Rockite	270	1 7/8	3/8	Self-Lube	3.90
NFC-37636	4 x 2	Plaskite	700	2 3/8	3/4	Roller	13.20
NFC-37639	5 x 2	Plaskite	900	2 3/8	3/4	Roller	13.45
NFC-37637	6 x 2	Plaskite	900	2 3/8	3/4	Roller	18.84
NFC-37643	8 x 2	Plaskite	900	2 7/8	3/4	Roller	24.53


**Light Duty Self Lubricating Bearings**  
5/16" Mounting Bolt  
Applications: 90-115 Lbs.



Swivel




Rigid



Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
NFC-29906	9.74	NFC-31232	9.22	3 x 1 3/16	Ruberex	90	3 3/4
NFC-29920*	19.74	NFC-31239	10.20	4 x 1 5/16	Ruberex	115	4 1 3/16

\*With brake

**Caster Rollock Brake Kit**

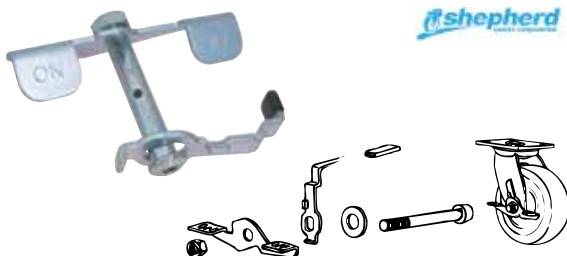

Tread-gripping action locks wheel and prevents rolling. Simple cam mechanism has no connecting linkage to wear or misalign. Installation is quick and easy. Instructions included. Available only for light medium duty and medium heavy duty Faultless swivel casters.

Item No.	Size	Price Each	Item No.	Size	Price Each
<b>Light Medium Duty Casters</b>			<b>Medium Heavy Duty Casters</b>		
NFC-32275	4	7.83	NFC-32280	4	11.26
NFC-32276	5	8.01	NFC-32277	5	9.45
			NFC-32278	6	9.98


**Medium Heavy Duty Roller Bearings**  
3/8" Mounting Bolt  
Applications: 350 - 1,000 Lbs.



Swivel



Rigid



Swivel		Rigid		Wheel Dia. x Width	Wheel Type	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each				
NFC-26837	38.78	NFC-27127	31.48	4 x 2	Vulc. Rubber	350	5 1/2
NFC-26908	40.41	NFC-27079	38.49	4 x 2	Polyflex	450	5 1/2
NFC-26926	52.14	NFC-27160	42.16	4 x 2	Semi-Steel	700	5 1/2
NFC-26819	42.56	NFC-27115	33.00	4 x 2	Plaskite	700	5 1/2
NFC-26780	57.80	NFC-27045	66.66	4 x 2	K-Wheel	700	5 1/2
NFC-26840	45.59	NFC-27129	33.29	5 x 2	Vulc. Rubber	400	6 1/2
NFC-26985	49.74	NFC-27036	41.92	5 x 2	Dyna-Tred Poly	750	6 1/2
NFC-26814	56.83	NFC-27123	36.01	5 x 2	Semi-Steel	900	6 1/2
NFC-26816	65.67	NFC-27114	31.18	5 x 2	Plaskite	900	6 1/2
NFC-26784	67.24	NFC-27046	63.77	5 x 2	K-Wheel	900	6 1/2
NFC-26827	50.75	—	—	6 x 2	Vulc. Rubber	410	7 1/2
NFC-26723	46.78	NFC-27155	45.03	6 x 2	Dyna-Tred	550	7 1/2
—	—	NFC-27081	31.74	6 x 2	Polyflex	700	7 1/2
NFC-26811	61.55	NFC-27124	53.11	6 x 2	Semi-Steel	900	7 1/2
NFC-26817	45.59	NFC-27116	36.44	6 x 2	Plaskite	900	7 1/2
NFC-26828	75.14	—	—	6 x 2	Duro-Tred	900	7 1/2
NFC-26829	115.10	NFC-27130	85.80	8 x 2	Duro-Tred	1000	9 1/2

Note: Roll lock brake kits available for all sizes.

**Threaded Stem Applications: 70 - 125 Lbs.**




Ruberex wheels. Self lubricating bearings.

Item No.	Wheel Dia. x Width	Capacity (Lbs.)	OAH	Stem	Price Each
NFC-30660	1 1/2 x 4 7/16	70	2 5/16	3/8-16 x 1 1/2	5.22
NFC-30648	2 x 7/8	80	2 17/32	3/8-16 x 1 1/2	4.48
NFC-30719	3 x 1 3/16	90	3 1/2	3/8-16 x 1 1/2	6.71
NFC-30764	4 x 1 5/16	115	4 1 1/16	1/2-13 x 1 1/2	12.95
NFC-30797	5 x 1 5/16	125	5 23/32	1/2-13 x 1 1/2	14.31



**Pneumatic Applications: 300 - 350 Lbs.**



Ball bearings. Moves smoothly and safely over rough and bumpy surfaces. Absorbs shock and vibration caused by floor obstructions or outdoor terrains. Four ply tires.

Swivel		Rigid		Tire Diameter	Capacity (Lbs.)	OAH
Item No.	Price Each	Item No.	Price Each			
NFC-46110	66.95	NFC-46111	68.20	8	300	9 1/2
NFC-46112	79.57	NFC-46113	62.79	10	350	11 1/2

STAINLESS STEEL CASTERS

Buy One or Buy Bulk & **SAVE!**

Swivel

**NEW**



Part Number	Wheel Specifications					Plate Specifications					Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)		
1256091	3.5 x 1.25	Poly/Polypropylene Core	300	4.688	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	32.76	
1256093	3.5 x 1.25	Poly/Polypropylene Core	350	4.688	Delrin	2.5	3.625 x 2.5	1.75	0.313	53.67	
1256094	3.5 x 1.25	TPR	250	4.688	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	44.21	
1256096	4 x 1.25	Poly/Polypropylene Core	350	5.125	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	53.00	
1256098	4 x 1.25	Poly/Polypropylene Core	350	5.125	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	40.38	
1256099	4 x 1.25	TPR	300	5.125	Two Piece Delrin	2.5	3.625 x 2.5	1.75	0.313	46.77	
1256111	5 x 1.25	Polypropylene	350	6.188	Two Piece Delrin	3.0	3.625 x 2.5	1.75	0.313	54.33	
1256113	5 x 1.25	Poly/Polypropylene Core	350	6.188	Two Piece Delrin	3.0	3.625 x 2.5	1.75	0.313	46.77	
1256114	5 x 1.25	Poly/Polypropylene Core	325	6.188	Two Piece Delrin	3.0	3.625 x 2.5	1.75	0.313	52.44	

Swivel with Brake

**NEW**



Part Number	Wheel Specifications					Plate Specifications					Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)		
1256107	4 x 2	Polyolefin	900	5.625	Two Piece Delrin	1.438	4 x 4.5	2.625 to 3.000	0.375	89.52	
1256108	4 x 2	Urethane	600	5.625	Two Piece Delrin	1.438	4 x 4.5	2.625 to 3.000	0.375	94.27	
1256109	6 x 2	Urethane	375	5.625	Two Piece Delrin	1.438	4 x 4.5	2.625 to 3.000	0.375	90.08	
1256116	5 x 2	Polyolefin	900	6.500	Two Piece Delrin	1.625	4 x 4.5	2.625 to 3.000	0.375	86.86	
1256117	5 x 2	Urethane	900	6.500	Two Piece Delrin	1.625	4 x 4.5	2.625 to 3.000	0.375	98.87	
1256118	5 x 2	Urethane	375	6.500	Two Piece Delrin	1.625	4 x 4.5	2.625 to 3.000	0.375	94.30	
1256138	6 x 2	Urethane	900	7.500	Two Piece Delrin	1.875	4 x 4.5	2.625 to 3.000	0.375	103.42	
1256139	6 x 2	Urethane	600	7.500	Two Piece Delrin	1.875	4 x 4.5	2.625 to 3.000	0.375	98.75	
1256141	6 x 2	Polyolefin	900	7.500	Two Piece Delrin	1.875	4 x 4.5	2.625 to 3.000	0.375	93.07	
1256169	8 x 2	Polyolefin	1200	9.500	Two Piece Delrin	2.375	4 x 4.5	2.625 to 3.000	0.375	97.83	
1256170	8 x 2	Urethane	1000	9.500	Two Piece Delrin	2.375	4 x 4.5	2.625 to 3.000	0.375	118.42	
1256171	6 x 2	Urethane	600	9.500	Two Piece Delrin	2.375	4 x 4.5	2.625 to 3.000	0.375	110.09	

Rigid

**NEW**



Part Number	Wheel Specifications					Plate Specifications					Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)			
1256192	3.5 x 1.25	Polypropylene	300	4.688	Two Piece Delrin	3 x 2.5	1.750	0.313	29.39		
1256194	3.5 x 1.25	Poly/Polypropylene Core	350	4.688	Delrin	3 x 2.5	1.750	0.313	32.81		
1256195	3.5 x 1.25	TPR	250	4.688	Two Piece Delrin	3 x 2.5	1.750	0.313	28.75		
1256198	4 x 1.25	Polypropylene	350	5.125	Two Piece Delrin	3.625 x 2.5	1.750	0.313	30.16		
1256200	4 x 1.25	Poly/Polypropylene Core	350	5.125	Two Piece Delrin	3.625 x 2.5	1.750	0.313	21.82		
1256201	4 x 1.25	TPR	300	5.125	Two Piece Delrin	3.625 x 2.5	1.750	0.313	25.86		
1256204	5 x 1.25	Polypropylene	350	6.188	Two Piece Delrin	3.625 x 2.5	1.750	0.313	25.68		
1256206	5 x 1.25	Polypropylene	350	6.188	Two Piece Delrin	3.625 x 2.5	1.750	0.313	30.00		
1256207	5 x 1.25	TPR	325	6.188	Two Piece Delrin	3.625 x 2.5	1.750	0.313	35.34		
1256213	4 x 2	Urethane	600	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	63.45		
1256214	4 x 2	Soft Rubber	350	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	59.29		
1256216	4 x 2	Polyolefin	900	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	53.90		
1256219	5 x 2	Urethane	900	6.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	70.76		
1256220	5 x 2	Soft Rubber	375	6.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	66.24		
1256222	5 x 2	Polyolefin	900	6.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	58.80		
1256223	6 x 2	Urethane	900	7.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	74.39		
1256226	6 x 2	Soft Rubber	600	7.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	69.77		
1256227	6 x 2	Polyolefin	900	7.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	61.31		
1256228	6 x 2	Polyolefin	900	9.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	66.37		
1256230	8 x 2	Urethane	1000	5.625	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	88.75		
1256231	8 x 2	Soft Rubber	900	8.500	Two Piece Delrin	4 x 4.5	2.625 to 3.000	0.375	79.35		

STAINLESS STEEL HIGH TEMP CASTERS

Swivel

**NEW**



Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)	
1256090	3.5 x 1.25	Nylon	300	4.688	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	53.31
1256092	3.5 x 1.25	Polypropylene Retort	300	4.688	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	57.30
1256095	4.0 x 1.25	Nylon	350	5.125	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	58.52
1256097	4.0 x 1.25	Polypropylene Retort	150	5.125	Plain Bore	2.5	3.625 x 2.5	1.75	0.313	57.19
1256112	5.0 x 1.25	Polypropylene Retort	175	6.188	Plain Bore	3.0	3.625 x 2.5	1.75	0.313	72.32



Nylon

Polypropylene Retort

Swivel with Brake

**NEW**



Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)	
1256106	4.0 x 2.0	Nylon	900	5.625	Roller	2.876	4 x 4.5	2.625 to 3.000	0.375	125.55
1256115	5.0 x 2.0	Nylon	900	6.500	Roller	3.25	4 x 4.5	2.625 to 3.000	0.375	127.57
1256140	6.0 x 2.0	Nylon	900	7.500	Roller	3.75	4 x 4.5	2.625 to 3.000	0.375	139.61



Nylon

Rigid

**NEW**



Part Number	Wheel Specifications					Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Overall Size L x W (in)	Mouting Hole Width (in)	Bolt Hole Diameter (in)		
1256191	3.5 x 1.25	Nylon	300	4.688	Plain Bore	3.625 x 2.5	1.750	0.313	42.73	
1256193	3.5 x 1.25	Polypropylene Retort	300	4.688	Plain Bore	3.625 x 2.5	1.750	0.313	44.01	
1256197	4.0 x 1.25	Nylon	350	5.125	Plain Bore	3.625 x 2.5	1.750	0.313	37.41	
1256199	4.0 x 1.25	Polypropylene Retort	150	5.125	Plain Bore	3.625 x 2.5	1.750	0.313	36.34	
1256203	5.0 x 1.25	Nylon	350	6.188	Plain Bore	3.625 x 2.5	1.750	0.313	41.45	
1256205	5.0 x 1.25	Polypropylene Retort	175	6.188	Plain Bore	3.625 x 2.5	1.750	0.313	55.05	
1256215	4.0 x 2.0	Nylon	900	5.625	Roller	4.0 x 4.5	2.625 to 3.000	0.375	87.07	
1256221	5.0 x 2.0	Nylon	900	6.500	Roller	4.0 x 4.5	2.625 to 3.000	0.375	101.97	
1256229	6.0 x 2.0	Nylon	900	7.500	Roller	4.0 x 4.5	2.625 to 3.000	0.375	125.04	
1256232	8.0 x 2.0	Nylon	900	9.500	Roller	4.0 x 4.5	2.625 to 3.000	0.375	135.47	



Nylon Plain Bore

Polypropylene Retort

Nylon Roller Bore

**CAN'T FIND  
WHAT YOU'RE  
LOOKING FOR?**

Ask Us. We're here to help!



RIGID CASTERS

Buy One or Buy Bulk & **SAVE!**



**NEW**



TPR



Rubber



Steel



Polyurethane



Polyolefin



Phenolic

Part Number	Wheel Specifications					Plate Specifications			
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Overall Size L x W (in)	Mouting Hole Width (in)	Plate Bolt Hole Diameter (in)	Price Each
1256086	3 x .813	Soft Rubber	110	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	6.44
1256087	3 x .813	TPR	110	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	6.54
1256088	3 x .813	Hard Rubber	125	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	7.13
1256089	3 x .813	Polyolefin	125	3.500	Plain Bore	2.625 x 3.750	1.750	0.313	6.26
1256123	4 x .938	Soft Rubber	125	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	7.31
1256124	4 x .938	TPR	125	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	9.35
1256125	4 x .938	Hard Rubber	150	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	10.32
1256126	4 x .938	Polyolefin	150	4.875	Plain Bore	2.625 x 3.750	1.750	0.313	8.51
1256147	5 x .938	Soft Rubber	130	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	12.52
1256148	5 x .938	TPR	130	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	11.35
1256149	5 x .938	Hard Rubber	150	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	12.52
1256150	5 x .938	Polyolefin	150	5.875	Plain Bore	2.625 x 3.750	1.750	0.313	8.18
1256178	2 x .813	Soft Rubber	90	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	2.48
1256179	2 x .813	Polyolefin	125	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	2.07
1256180	2 x .813	Hard Rubber	125	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	2.71
1256181	2 x .813	Steel	125	2.500	Plain Bore	1.50 x 2.656	0.938	0.25	4.75
1256182	2.5 x 1.125	Soft Rubber	100	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	4.27
1256183	2.5 x 1.125	Polyolefin	175	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	3.63
1256184	2.5 x 1.125	Hard Rubber	175	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	4.75
1256185	2.5 x 1.125	Steel	175	3.250	Plain Bore	2.125 x 4.375	1.063	0.313	7.08
1256186	3 x 1.250	Polyurethane	250	4.250	Ball Bearings	1.750 x 2.813	2.750 to 3.000	0.313	12.34
1256187	2 x .813	Soft Rubber	90	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	6.26
1256188	3 x 1.250	Polyolefin	210	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	5.44
1256189	3 x 1.250	Hard Rubber	225	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	7.00
1256190	3 x 1.250	Steel	225	3.813	Plain Bore	2.313 x 4.875	1.188	0.313	8.36
1256196	4 x 1.250	Polyurethane	300	5.25	Ball Bearings	1.750 x 2.813	2.750 to 3.000	0.313	16.36
1256202	5 x 1.250	Polyurethane	350	6.25	Ball Bearings	1.750 x 2.813	2.750 to 3.000	0.313	19.68
1256208	4 x 1.375	Soft Rubber	200	5.000	Plain Bore	3.125 x 6.125	1.750	0.375	13.06
1256209	4 x 1.375	Polyolefin	250	5.000	Plain Bore	3.125 x 6.125	1.750	0.375	10.50
1256210	4 x 1.375	Hard Rubber	300	5.000	Plain Bore	3.125 x 6.125	1.750	0.375	14.26
1256211	4 x 2	Polyurethane	500	5.625	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	27.55
1256212	4 x 2	Phenolic	800	5.625	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	26.37
1256217	5 x 2	Polyurethane	600	6.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	31.43
1256218	5 x 2	Phenolic	1000	6.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	29.54
1256224	6 x 2	Polyurethane	800	7.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	35.83
1256225	6 x 2	Phenolic	1200	7.500	Roller Bearings	4 x 4.5	2.625 to 3.000	0.375	32.25

SWIVEL CASTERS



**NEW**




Part Number	Wheel Specifications						Plate Specifications				Price Each
	Wheel Diameter x Width (in)	Wheel Type	Capacity (lbs)	OAH (in)	Bearing	Swivel Radius (in)	Overall Size L x W (in)	Mouting Hole Width (in)	Plate Bolt Hole Diameter (in)		
1256054	2 x .813	Soft Rubber	90	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	3.53	
1256055	2 x .813	Polyolefin	125	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	3.12	
1256056	2 x .813	Hard Rubber	125	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	3.71	
1256057	2 x .813	Steel	125	2.500	Plain Bore	1.813	1.938 x 2.563	0.938	0.250	5.14	
1256058	2 x .813	TPR	80	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	4.17	
1256059	2 x .813	Hard Rubber	90	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	4.52	
1256060	2 x .813	Polyolefin	90	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	3.60	
1256065	2 x .813	Soft Rubber	80	2.625	Plain Bore	1.938	1.188 x 2	0.813	0.188	4.32	
1256066	2.5 x .813	Soft Rubber	80	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	4.91	
1256067	2.5 x .813	TPR	80	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	4.65	
1256068	2.5 x .813	Hard Rubber	95	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	5.01	
1256069	2.5 x .813	Polyolefin	95	3.125	Plain Bore	2.125	1.188 x 2	0.813	0.188	3.99	
1256074	2.5 x 1.125	Soft Rubber	100	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	6.31	
1256075	2.5 x 1.125	Polyolefin	175	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	5.47	
1256076	2.5 x 1.125	Hard Rubber	175	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	6.77	
1256077	2.5 x 1.125	Steel	175	3.250	Plain Bore	2.250	2.750 x 3.875	1.750	0.313	8.77	
1256078	3 x .813	Soft Rubber	110	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	7.13	
1256079	3 x .813	TPR	110	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	6.54	
1256080	3 x .813	Hard Rubber	120	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	7.13	
1256081	3 x .813	Polyolefin	120	3.500	Plain Bore	2.500	2.625 x 3.750	1.750	0.313	6.26	
1256100	3 x 1.250	Soft Rubber	150	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	8.13	
1256101	3 x 1.250	Polyolefin	210	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	7.26	
1256102	3 x 1.250	Hard Rubber	225	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	8.71	
1256103	3 x 1.250	Steel	225	3.813	Plain Bore	2.625	3.125 x 4.125	2.375	0.313	11.81	
1256127	4 x .938	Soft Rubber	125	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	9.76	
1256128	4 x .938	TPR	125	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	9.35	
1256129	4 x .938	Hard Rubber	150	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	10.32	
1256130	4 x .938	Polyolefin	150	4.875	Plain Bore	3.438	2.625 x 3.750	1.750	0.313	8.51	
1256135	4 x 1.375	Soft Rubber	200	5.000	Plain Bore	3.438	4 x 5.125	3.000	0.375	15.95	
1256136	4 x 1.375	Polyolefin	250	5.000	Plain Bore	3.438	4 x 5.125	3.000	0.375	13.95	
1256137	4 x 1.375	Hard Rubber	300	5.000	Plain Bore	3.438	4 x 5.125	3.000	0.375	17.10	
1256151	5 x .938	Soft Rubber	130	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	12.52	
1256152	5 x .938	TPR	130	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	11.35	
1256153	5 x .938	Hard Rubber	150	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	12.52	
1256154	5 x .938	Polyolefin	150	5.875	Plain Bore	4.125	2.625 x 3.750	1.750	0.313	11.12	
1256159	3 x 1.250	Polyurethane	250	4.250	Precision Bearings	4.375	2.625 x 3.750	1.750	0.313	21.34	
1256161	4 x 1.250	Polyurethane	300	5.250	Precision Bearings	4.375	2.625 x 3.750	1.750	0.313	25.48	
1256163	5 x 1.250	Polyurethane	315	6.250	Precision Bearings	4.375	2.625 x 3.750	1.750	0.313	28.34	
1256167	6 x 2	Phenolic	1200	7.500	Roller Bearings	4.750	4 x 4.5	2.625 to 3.000	0.375	37.52	
1256172	4 X 2	Polyurethane	500	5.625	Roller Bearings	5.438	4 x 4.5	2.625 to 3.000	0.375	41.25	
1256173	4 X 2	Phenolic	800	5.625	Roller Bearings	5.438	4.5 x 7	2.625 to 3.000	0.375	45.23	
1256174	5 x 2	Polyurethane	600	6.500	Roller Bearings	5.813	4.5 x 5	2.625 to 3.000	0.375	43.09	
1256175	5 x 2	Phenolic	900	6.500	Roller Bearings	5.813	4.5 x 8	2.625 to 3.000	0.375	48.86	
1256176	6 x 2	Polyurethane	720	7.500	Roller Bearings	6.000	4.5 x 6	2.625 to 3.000	0.375	50.70	
1256177	6 x 2	Phenolic	900	7.500	Roller Bearings	6.000	4.5 x 9	2.625 to 3.000	0.375	47.07	

THREADED STEM CASTERS

Buy One or Buy Bulk & **SAVE!**

**NEW**

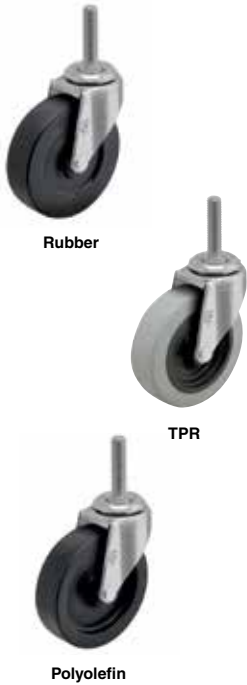

Part Number	Wheel Diameter x Width in	Wheel Type	Capacity lbs	OAH	Bearing	Swivel Radius	Stem Size Length x Width in	Thread Size in	Price Each
1256061	2 x .813	Soft Rubber	80	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	4.52
1256062	2 x .813	TPR	80	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	4.37
1256063	2 x .813	Hard Rubber	90	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	4.73
1256064	2 x .813	Polyolefin	90	2.625	Plain Bore	1.938	1-1/2 x 3/8	3/8-16	3.81
1256070	2.5 x .813	Soft Rubber	80	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	5.14
1256071	2.5 x .813	TPR	80	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	4.96
1256072	2.5 x .813	Hard Rubber	95	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	5.26
1256073	2.5 x .813	Polyolefin	95	3.125	Plain Bore	2.125	1-1/2 x 3/8	3/8-16	4.27
1256082	3 x .813	Soft Rubber	110	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	5.85
1256083	3 x .813	TPR	110	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	5.49
1256084	3 x .813	Hard Rubber	125	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	6.13
1256085	3 x .813	Polyolefin	125	3.500	Plain Bore	2.500	1-1/2 x 3/8	3/8-16	4.86
1256131	4 x .938	Soft Rubber	125	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	9.33
1256132	4 x .938	TPR	125	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	8.92
1256133	4 x .938	Hard Rubber	150	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	9.46
1256134	4 x .938	Polyolefin	150	4.750	Plain Bore	3.438	1-1/2 x 3/8	3/8-16	7.69
1256155	5 x .938	Soft Rubber	130	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	11.76
1256156	5 x .938	TPR	130	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	10.58
1256157	5 x .938	Hard Rubber	150	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	11.76
1256158	5 x .938	Polyolefin	150	5.750	Plain Bore	4.125	1-1/2 x 3/8	3/8-16	10.38


Rolling Star Casters  
Light Duty  
Applications: 33-88 Lbs.



Mobilizes stationary products at a very low overall height. Can be used with chairs, couches and patio furniture.

Item No.	Overall Diameter	Ball Diameter	Wheel Type	Capacity (Lbs.)	Type	OAH	Price Each
WC-BP99-10	3/4	1/2	Nylon	33	Rigid	3/4	1.99
WC-BP99-20	1 1/2	1 3/16	Nylon	88	Rigid	1 1/2	4.36
WC-BP99-30	1 1/2	1 3/16	Nylon	46-57	Spring	2 13/16	4.93

Leveling Casters

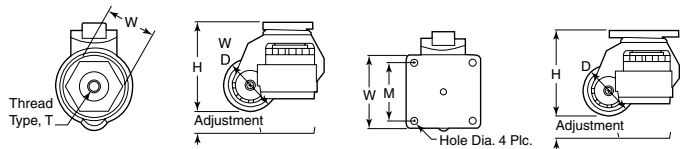


This caster incorporates the feasibility to move equipment easily with a high-grade nylon wheel, leveling, and vibration control. This caster combines precision hand leveling adjustment, anti-vibration control and 360 degree freedom of motion in one unit. Available with either a stud mount or a plate mount.

Item No.	Mount	Load Range Min.	Load Range Max.	H	Adjustment	D	Thread Type T	Thread Depth	Mounting Holes	M	W	Price Each
<b>Style A</b>												
SX-50S	Stud	25	50	2.80	.39	1.65	M8	.47	—	—	1 1/16	47.85
SX-300S	Stud	200	300	3.27	.39	1.97	M12	.59	—	—	1 1/8	69.27
SX-300P	Plate	200	300	3.27	.39	1.97	—	—	.26	2.28	2 1/8	69.27
SX-600S	Stud	300	600	4.02	.59	2.48	M12	.59	—	—	2 1/8	101.16
SX-600P	Plate	400	600	4.02	.59	2.48	—	—	.35	2.76	3 1/8	101.16
SX-1000S	Stud	600	1,000	4.72	.71	2.83	M16	.63	—	—	2 3/4	114.50
SX-1000P	Plate	800	1,000	4.72	.71	2.83	—	—	.43	2.76	3 3/4	114.50
<b>Style B</b>												
SX-200S	Stud	50	200	2.78	.35	1.97	M12	.59	—	—	1 1/8	47.87
SX-200P	Plate	50	200	2.78	.35	1.97	—	—	.26	2.28	2 1/8	47.87
<b>Style C</b>												
SX-400P	Plate	300	400	2.99	.39	1.97	—	—	.35	2.76	3 1/8	78.87
SX-800P	Plate	600	800	3.74	.51	2.83	—	—	.35	2.76	3 1/8	97.37




**BALL CASTERS & TRANSFERS**


**Hevi-Load™  
Inch**




**Type A**



**Type B**



**Type C**




**Type D**

Used for heavier loads than ball casters. Ball transfers use a recirculating ball system to support and facilitate the rotation of the primary ball. The small balls travel on a hardened steel, precision machined track that resists wear and damage. Runs equally well in any position. Ideal where damage and impact protection is essential. Ball units provide instantaneous change of direction not possible with wheel casters.

Item No.	Type	Ball Dia.	Y	W	D	L	E	FxF	CxC	Capacity (Lbs.)	Price Each
SKF-7101	A	.5	.77	.63	.81	—	—	—	—	75	33.93
SKF-7121	A	1.0	1.76	1.52	2	—	—	—	—	700	109.11
SKF-7110	B	.5	1.41	.63	.81	.64	1/2-20	—	—	75	37.89
SKF-7127	B	1.0	2.85	1.68	1.75	.95	1/2-20	—	—	300	100.83
SKF-7131	B	1.0	3.03	1.78	2	1	1/2-20	—	—	700	117.43
SKF-7154	B	1.5	4.50	2.38	2.38	1.60	3/4-16	—	—	2,204	168.24
SKF-7103*	C	.5	.89	.75	.94	.13	.14	1.75	1.37	75	55.25
SKF-7122	C	1.0	1.63	1.41	1.75	.19	.22	2.25	1.75	300	121.88
SKF-7123	C	1.0	1.79	1.54	2	.25	.28	3	2.28	700	151.04
SKF-7104*	D	.5	.88	.44	.94	.13	.14	1.75	1.37	75	57.79
SKF-7152	D	1.5	2.41	1.41	2.38	.50	.28	3	2.28	2,204	221.91

\*Diameter - round


**Low Profile  
Metric**



Flange mounted ball transfers offer a low profile, multi-directional solution to various material handling, positioning, and/or conveyance applications. All units, except the stainless steel model, come complete with a felt seal. The stainless steel unit is made from 420 stainless steel and has a unique multi-hole filtration system designed to purge out contamination and is provided with no oil/no seal, which allows the unit to operate in harsh conditions by efficiently filtering out debris through the base. Metric dimensions are in millimeters.

Item No.	Ball Dia.	Load Up Cap. Lbs.	Load Down Cap. Lbs.	Fixing Holes	A	B	C	D	E	F	Price Each
<b>Carbon Steel</b>											
SKF-3016	15.8	26	13	2	22.2	41.3	10.2	8.3	3.2	6	4.96
SKF-1008	25.4	121	55	3	37.2	73	14.2	15.8	3.5	6.3	6.86
SKF-2002	39.7	496	220	3	62	94.6	21.2	27.3	6.3	14	30.42
<b>Stainless Steel</b>											
SKF-3274	31.7	276	121	3	45.5	73.7	16.2	19.9	4.2	8	29.21


**Medium Duty  
Metric**



Zinc plated housing with Type 420 stainless balls. A felt seal is included on all but SKF-701. Maximum temperature is 212 degree Fahrenheit. Dimensions are in millimeters.

Item No.	Ball Dia.	Capacity (Lbs.)	A	B	C	D	E	F	Price Each
SKF-701	15	132	24	31	9.5	21.0	2.8	6.3	7.74
SKF-702	22	352	36	45	9.8	30.0	2.8	5.5	11.74
SKF-703	30	661	45	55	13.8	37.0	4.0	8.3	20.93
SKF-704	45	1,344	62	75	19.0	53.5	4.0	10.0	45.01


**Heavy Duty  
Metric**



Solid body steel ball transfers were designed for heavy and impact load applications. The units incorporate a seal and self cleaning hole for maximum efficiency and smooth running. They are machined with solid steel bodies and hardened work surfaces. Steel models are steel bodies with chrome steel. Hardness 60-66 HRC, zinc plated finish. Stainless models have stainless bodies A1S1 303 and stainless bearings A1S1 420 or 440, bright machined. All dimensions are in millimeters.

Item No.	Ball Dia.	Capacity (Lbs.)	A mm	B mm	C mm	D mm	E mm	Price Each
<b>Steel</b>								
SKF-2213	22	397	36	45	30.5	9.8	6	22.80
SKF-3013	30	770	45	55	36.8	13.8	8.3	31.76
<b>Stainless</b>								
SKF-2215	22	264	36	45	30.5	9.8	6	56.46

**Spring Loaded Ball Transfers  
Inch**



Shears, presses and molding machines are just a few of the many applications where open loaded ball transfers can be used. A press for example may have spring loaded ball units set in the platen to facilitate the on and off loading of the workpiece. When the press operates the springs compress and the ball units sink below the surface-leaving the workpiece on a firm base. When pressure is released the ball units rise allowing the ball to roll, enabling the workpiece to be removed easily. Steel bodies with hardened carbon steel balls. "A" style flanges have three equally spaced holes on bolt center diameters (BCD) listed below.

Item No.	Ball Dia.	Support Load (Lbs.)	Load To Fully Depress	A	B	C	D	E	F	Mounting Hole Size BCD	Price Each
SKF-3011	A 3/4	22	66	14	2.03	1.44	2.62	2.48	.31	.27 2.00	75.86
SKF-3009	B 3/4	22	77	.37	2.19	1.44	—	2.56	—	—	52.32
SKF-1018	A 1	77	220	.23	2.10	1.75	3.00	2.64	.31	.27 2.37	86.40
SKF-1016	B 1	77	309	.47	2.31	1.75	—	2.78	—	—	48.15
SKF-1028	A 1 1/4	220	397	.30	3.05	2.31	3.50	3.73	.37	.27 2.87	148.73
SKF-1026	B 1 1/4	220	441	.41	3.34	2.31	—	3.75	—	—	92.22

FURNITURE CASTERS

Buy One or Buy Bulk & **SAVE!**

Furniture Casters  
Light Duty  
Applications: 75-90 Lbs.



Furniture Casters  
Light Duty  
Applications: 100 Lbs.



Swivel Plate



Swivel w/ Brake Plate




Plate Specifications		
Plate Type	TPN	TPC
Overall Size	1 1/2 x 1 1/2	1 1/16 x 2
Hole Spacing	1 x 1	1 1/16 x 1 1/16
Hole Dia.	5/32	1/4

Hooded Twin Casters. Available in swivel and swivel with brake. Black polypropylene.

Swivel w/ Brake		Swivel		Wheel Dia. x Width	Capacity (Lbs.)	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each				
WC-T501-75	1.87	---	---	2 x 1 1/16	75	2 7/16	TPC
WC-T501-85	2.55	---	---	2 x 1 1/16	75	2 5/8	TPN
---	---	WC-T601-60	2.06	2 1/2 x 2	90	2 11/16	TPC

Furniture Casters - Plate  
Light-Medium Duty  
Applications: 125-150 Lbs.



Swivel



Swivel w/ Brake




Plate Specifications		
Plate Type	TLE	TPN
Overall Size	1 3/4 x 3	1 1/2 x 1 1/2
Hole Spacing	1 1/16 x 2 1/4	1 x 1
Hole Dia.	5/32	5/32

Open twin wheel casters. Recommended for medical equipment, displays, office equipment, store fixtures and institutional furniture.

Swivel w/ Brake		Swivel		Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	OAH	Plate Type
Item No.	Price Each	Item No.	Price Each						
WC-O001-05	3.46	WC-O001-10	3.21	Polypropylene	3 x 2 7/16	125	Plain	3 3/16	TLE
WC-O001-15	2.96	WC-O001-20	2.71	Polypropylene	3 x 2 7/16	125	Plain	3 3/16	TPN

Furniture Casters  
Light Duty  
Applications: 75-100 Lbs.




Friction Stem Ring




Grip Neck Stem




Threaded Stem



Friction Ring Stem



Grip Neck Stem



Threaded Stem

Item No.	Wheel Type	Wheel Dia. x Width	Capacity (Lbs.)	Bearing	D	L	OAH	Price Each
<b>Friction Ring Stem</b>								
WC-9P04-10	Soft Rubber	2 x 2	75	Sintered	7/16	1 5/8	2 5/8	8.42
<b>Grip Neck Stem</b>								
WC-9P27-10	Vinyl	2 x 2	100	Sintered	5/16	1 1/2	2 11/16	7.98
<b>Threaded Stem</b>								
WC-9704-10	Soft Rubber	2 x 2	75	Sintered	5/16	3/4	2 5/8	8.61