



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AH 104N2450D1 (2.4GHz band)

Shapes

L= 10.0 ± 0.3 mm
 W= 4.0 ± 0.3 mm
 T= 1.0 ± 0.3 mm

Feature

- * Wide Band
- * High Performance




Actual data
 Efficiency : -1.3dB (73%)
 Peak Gain : 2.1dBi @2450MHz
 Average Gain : 0.3dBi (ZX plane-Vertical polarization)




*on Taiyo Yuden's Evaluation Board (54 x 12 mm)
 *Element-GND Distance : 1.5 mm

Electrical Characteristics

		2400MHz	2450MHz	2500MHz	
Efficiency [dB]		-1.4 (72%)	-1.3 (73%)	-1.2 (76%)	
Peak gain [dBi]		1.7	2.1	1.4	
Average gain [dBi]	XY-plane	TX-H	-2.6	-2.5	-2.5
		TX-V	-29.5	-29.0	-29.1
	YZ-plane	TX-H	-2.4	-2.5	-2.5
		TX-V	-15.1	-15.1	-15.3
	ZX-plane	TX-H	-17.1	-17.0	-16.8
		TX-V	0.3	0.3	0.5

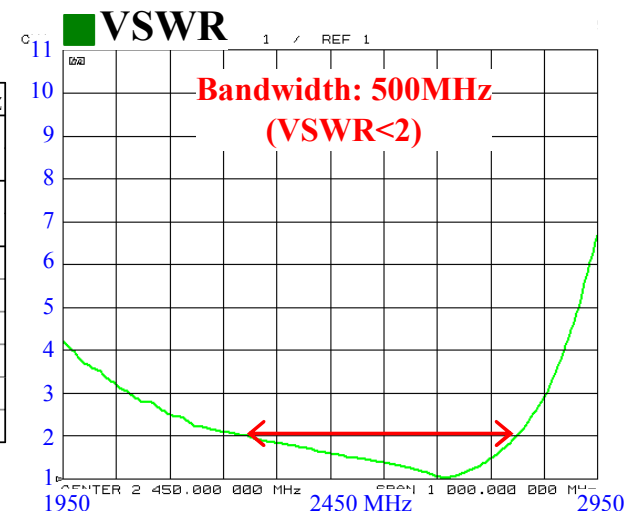

Radiation Pattern

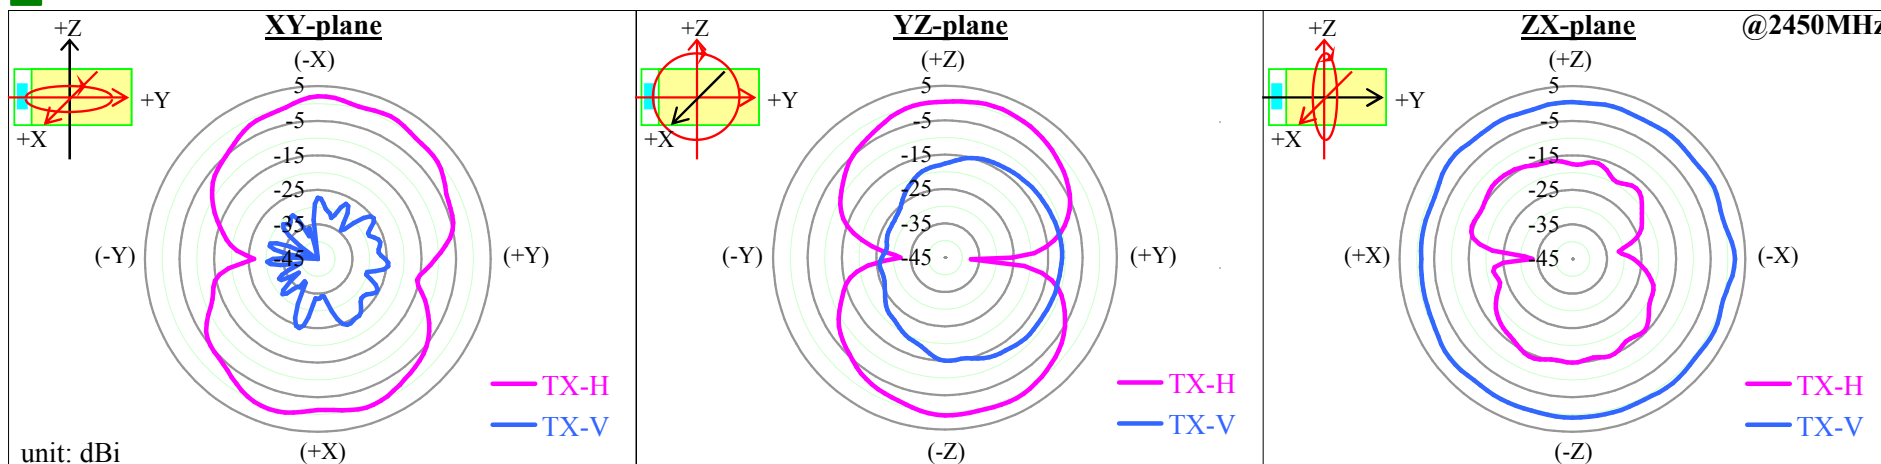

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.
 TAIYO YUDEN reserves the right to make change to the Date at any time without notice.
 Before making final selection, please check product specification

2.4 / 5GHz Multilayer Monopole Antenna (for W-LAN)

Date: Sep/01/2011

AH 104N2450D1 (5GHz band)

Shapes

L= 10.0 ± 0.3 mm
 W= 4.0 ± 0.3 mm
 T= 1.0 ± 0.3 mm

Feature

- * Wide Band
- * High Performance



Actual data

Efficiency : -1.6dB (69%)
Peak Gain : 2.4dBi
@5250MHz




*on Taiyo Yuden's Evaluation Board (54 x 12 mm)


*Element-GND Distance : 1.5 mm

Electrical Characteristics

			4900MHz	5250MHz	5900MHz
Efficiency [dB]			-2.0 (64%)	-1.6 (69%)	-2.0 (64%)
Peak gain [dBi]			2.2	2.4	2.4
Average gain [dBi]	XY-plane	TX-H	-3.2	-3.1	-3.2
		TX-V	-25.4	-24.6	-22.7
	YZ-plane	TX-H	-3.0	-2.6	-3.0
		TX-V	-7.7	-8.2	-8.8
	ZX-plane	TX-H	-10.9	-10.8	-12.3
		TX-V	-12.0	-10.6	-6.3

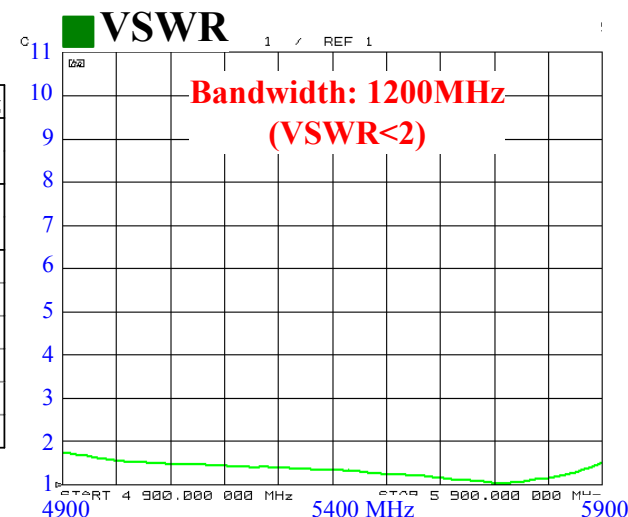

Radiation Pattern

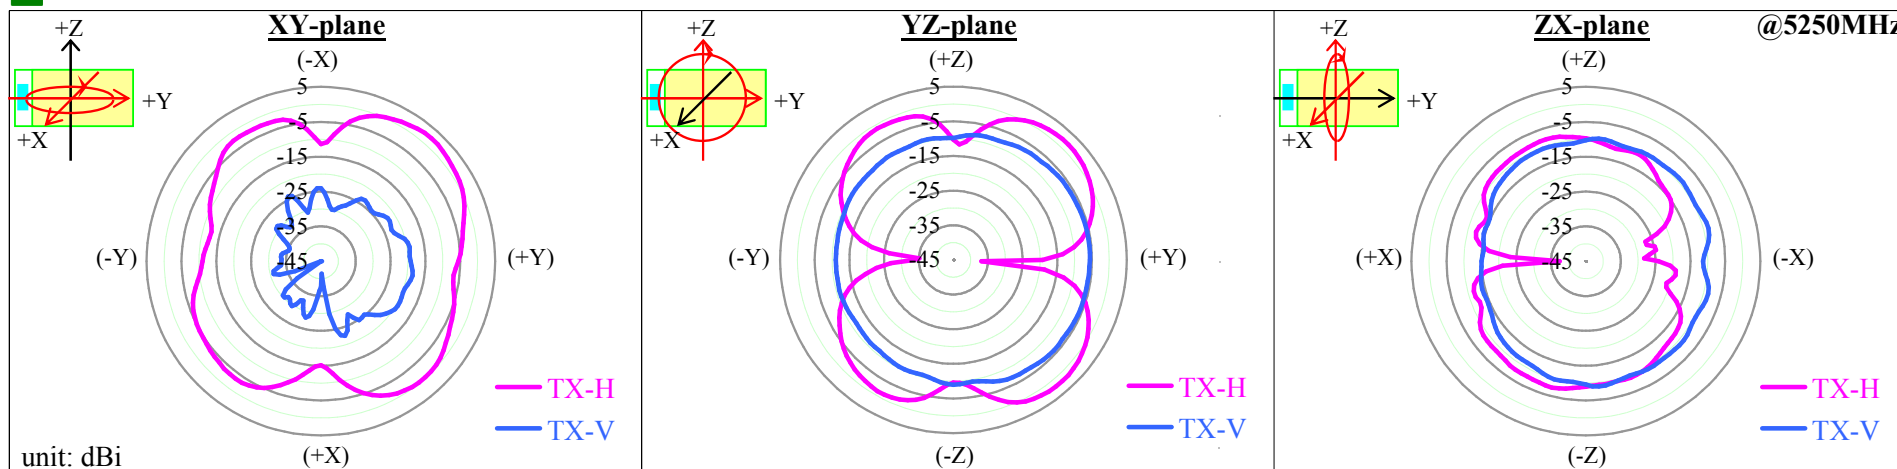

The data is reference only. Electrical characteristics vary depending on environment or measurement condition.

TAIYO YUDEN reserves the right to make change to the Date at any time without notice.

Before making final selection, please check product specification