



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AIMB-225

AMD G-series Quad Core Mini-ITX with DVI-I/LVDS/DP++/eDP, 5 COM, and Dual LAN

NEW

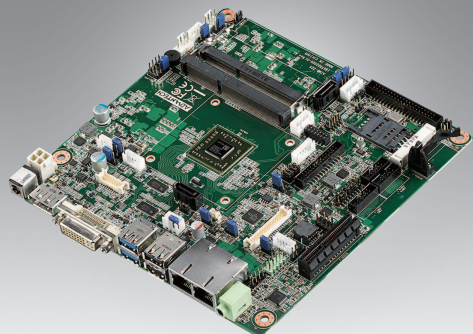

susiAccess

Features

- Supports AMD Stepe Eagle Quad core processor
- Two 204-pin SO-DIMM up to 16GB DDR3L 1600 SDRAM
- Supports dual display with DVI-I+LVDS, DVI-I+DP, eDP+LVDS and eDP+DP
- Supports 1 PCIe x4 and 2 Mini-PCIe expansion slots
- 5 COM, 6 USB 2.0, 2 USB 3.0
- Supports SUSIAccess and Embedded Software APIs


Software APIs:

Utilities:

Specifications

Processor System	SOC (28nm)	AMD Quad Core GX-424CC	AMD Quad Core GX-412HC
	Max. Speed	2.4GHz (Quad Core 25W)	1.2GHz (Quad Core 7W)
	L2 Cache	2 Mb	2 Mb
	BIOS	AMI 16 Mbit SPI	AMI 16 Mbit SPI
Expansion Slot	PCI	None	
	Mini-PCIe	2, F/S x 1 support mSATA, H/S x 1 with SIM card holder	
	PCIe	1, PCIe x4 (supports PCIe x16 card)	
Memory	Technology	Single channel DDR3L 1333/1600 MHz SDRAM	
	Max. Capacity	16 GB/8 GB per SO-DIMM	
	Socket	2 x 204-pin SO-DIMM (Non-ECC)	
	Controller	AMD Radeon™ R5E/R3E Graphics	
Graphics	VRAM	None	
	DVI-I	1, supports up to SXGA 1920 x 1200, colay eDP	
	LVDS	1, supports dual channel 48-bit up to 1920 x 1200, colay DP 1.2 port	
	Display Port 1.2	1, Supports DP++, resolution up to 2560 x 1600 x 24bpp @ 60Hz, colay LVDS	
	Dual Display	DVI-I+LVDS, DVI-I+DP, eDP+LVDS and eDP+DP, supports extended mode and clone mode	
	Interface	10/100/1000 Mbps	
Ethernet	Controller	GbE LAN1: Realtek 8111G GbE LAN2: Realtek 8111G	
	Connector	RJ-45 x 2	
	Max Data Transfer Rate	600 MB/s	
SATA	Channel	2, SATA 2 colay mSATA (optional); SATA 1 support SATA-DOM device	
	DVI-I	1	
Rear I/O	DP1.2	1	
	Ethernet	2	
	USB	4 (2 x USB 2.0/2 x USB 3.0)	
	Audio	1 (supports Line out, converts to Mic in or Line in)	
	DC jack	1 (2.5 mm)	
	LVDS & Inverter	1/1	
Internal Connector	eDP	1	
	USB	4 (USB 2.0 compliant)	
	Serial	5 (4 x RS-232, 1 x RS-232/422/485; COM 1 support RS-232/422/485 auto flow control; COM 5 support 5V/12V by jumper selection)	
	IDE	None	
	SATA	2	
	SATA PWR Connector	2	
	Parallel	1	
	PS/2 KB & MS	1	
	GPIO	8-bit	
	Output	System reset	
Watchdog Timer	Interval	Programmable 1 ~ 255 sec/min	
	Power Type	Single voltage 12V DC input; 1 x External DC jack; 1 x Internal 4-pin (2x2) power connector; Supports AT/ATX mode	
Power	Typical Power Consumption	12 V @ 1.89A (AMD GX-424 2.4 GHz processor/DDR3L 1600 MHz 8 GB x 2/SATA HDD x 1)	
	Operating	Non-Operating	
Environment	Temperature	0 ~ 60° C (32 ~ 140° F)	-40 ~ 85° C (-40 ~ 185° F)
	Dimensions	170 mm x 170 mm (6.69" x 6.69")	

Block Diagram

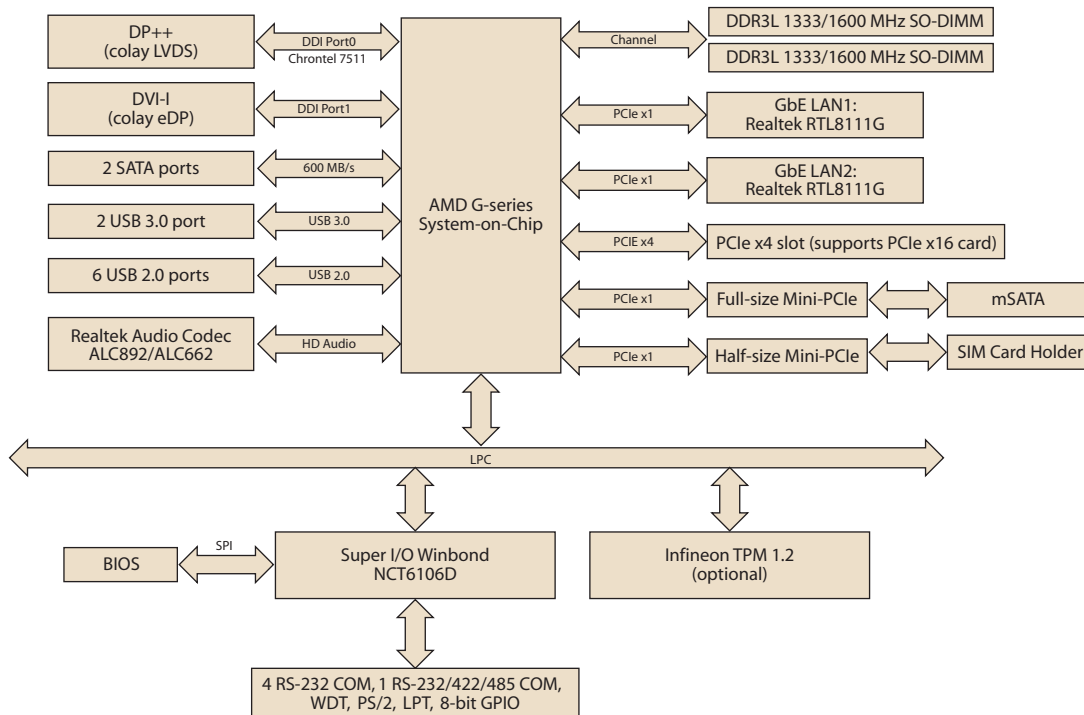

Ordering Information

Part Number	CPU	Display	TPM	GbE	SATA	COM	Thermal Solution
AIMB-225G2-00A1E	GX-424CC	DVI-I/eDP, DP++/LVDS	(1)	2	2	5	Active
AIMB-225G2-01A1E	GX-412HC	DVI-I/eDP, DP++/LVDS	(1)	2	2	5	Passive
AIMB-225G2-02A1E	GX-222GC	DVI-I/eDP, DP++/LVDS	(1)	2	2	5	Active

Note: Passive = fanless; Active = with fan
 *() BOM options available on MP version.

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	1
1700018785	SATA power cable	1
1700008876	1-to-4 serial ports cable kit, 35 cm	1
1700100250	1-to-1 serial ports cable kit, 25 cm	1
19Z0000769T000	I/O port bracket	1
2006022510	Startup manual	1
2066022500	Driver CD	1
1960054541N021	Cooler 60*60*27.1 for AIMB-225G2-00A1E	1
1960062823N001	Heatsink 87.65x60x20 for AIMB-225G2-01A1E	1
1960061914N001	Cooler I-Haswell-S-15W 60x60x26.5 for AIMB-225G2-02A1E	1

Optional Accessories

Part Number	Description
1700024884-01	USB cable with two ports/BKT, 25 cm
1703100121	USB cable with 2 ports/BKT, 12 cm
1703060191	A Cable 1*6P-2.0/M-DIN 6P(F)*2 19cm
96PSA-A84W12V1	ADAPTER AC100-240V 84W +12V/7A (FSP)
96PSA-A60W12V1-1	ADAPTER AC100-240V 60W +12V/5A (FSP)
1700001524	Power cable 3-pin 180 cm, USA type
170203183C	Power cable 3-pin 180 cm, Europe type
170203180A	Power cable 3-pin 180 cm, UK type
1700008921	Power cable 3-pin PSE Mark 183 cm

Optional Chassis

Part Number	Description
AIMB-B2000-00YE	Mini-ITX chassis with optional DC adapter
AIMB-T1000A-00Y1E	Mini-ITX chassis with optional DC adapter

Embedded OS/API

OS/API	Part number	Description
Win XPE	2070013921	WES2009 AIMB-225 x32 V4.7 24MU1
WES7E	2070013158	WES7E AIMB-225 x32 V5.1.8 EN/JP/TC/SC

I/O View

