



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AIMB-226

AMD R-series Quad Core/Dual Core Mini-ITX with HDMI/LVDS/DP++, 6 COM and Dual LAN

NEW

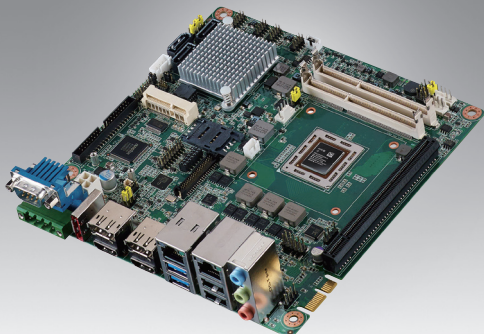

Features

- Supports AMD Mobile Bald Eagle Quad core/Dual Core processor
- Two 204-pin SO-DIMM up to 16 GB DDR3 2133/1600 MHz SDRAM
- Supports 4 independent display with HDMI/LVDS/Dual DP++(DP1.2)
- Dual LANs, 6 COM, 2 Mini PCIe
- Supports embedded software APIs and Utilities

Software APIs:

- H/W Monitor
- Watchdog
- GPIO
- Brightness

Utilities:

- BIOS flash
- Monitoring


Windows Embedded

CE FCC RoHS COMPLIANT PRODUCT

Specifications

Processor System	CPU	AMD Quad Core RX-427BB	AMD Dual Core RX-225FB
	Max. Speed	2.7 GHz (Quad core 35W)	2.2 GHz (dual core 17W)
	L2 Cache	2MB cache per core	
	Chipset	AMD R-series+A77E	
	BIOS	AMI EFI 64 Mbit SPI	
Expansion Slot	PCI	None	
	Mini-PCIe	2 F/S colay mSATA/SIM holder	
	PCIe	PClex1 with golden finger, PClex16 with slot	
Memory	Technology	Dual Channel DDR3 2133/1600 MHz	
	Max. Capacity	16 GB/8 GB per SO-DIMM	
	Socket	2 x 204-pin SO-DIMM (Non-ECC)	
Graphics	Controller	AMD Radeon™ HD 9000, support DX11, UVD4.2	
	VRAM	None	
	HDMI	2, supports up to 4096 x 2160 @ 24Hz, 3840 x 1260 @ 30Hz, 1920 x 1080p/i @ 60Hz (HDMI 1.4b)	
	LVDS	1, supports single channel 24-bit/ dual channel 48-bit LVDS up to 1900x 1200 (co-lay DP1, by BOM option)	
	DP++	2, support DP1.2 with 2560 x 1600 @ 60Hz or 3840 x 2160 @ 30Hz, DP1 co-lay LVDS	
	Multiple Display	4 independ display by DP(LVDS) / HDMI	
Ethernet	Interface	10/100/1000 Mbps	
	Controller	GbE LAN1: Realtek 8111G; GbE LAN2: Realtek 8111G	
	Connector	RJ-45 x 2	
SATA	Max Data Transfer Rate	600 MB/s	
	Channel	4	
Rear I/O	HDMI	2	
	DP1.2 port	2	
	Ethernet	2	
	USB	4 (2 USB 3.0+ 2 USB 2.0)	
	Audio	3 (Mic-in, Line-out, Line-in)	
	DCjack	1 (4pin phoenix connector)	
	eSATA	1	
Internal Connector	LVDS & Inverter	1 (by BOM optional)	
	USB	8 (USB 2.0)	
	Serial	6 (5 RS-232, 1 RS-232/422/485; COM4 support 5V/12V power, COM3 RS-232/422/485 auto flow control)	
	IDE	None	
	SATA	3 SATA III port	
	Parallel	None	
	GPIO	16-bit	
Watchdog Timer	Output	System reset	
	Interval	Programmable 1 ~ 255 sec/min	
Power Requirement	Typical	Single Voltage 12V DC input by 1x external Phoenix 4pin power connector or 1x internal 2x2-pin power connector; support AT/ATX mode by Jumper	
Environment		Operating	Non-Operating
	Temperature	0 ~ 60° C (32 ~ 140° F)	-40 ~ 85° C (-40 ~ 185° F)
Physical Characteristics	Dimensions	170 x 170 mm (6.69" x 6.69")	

Block Diagram

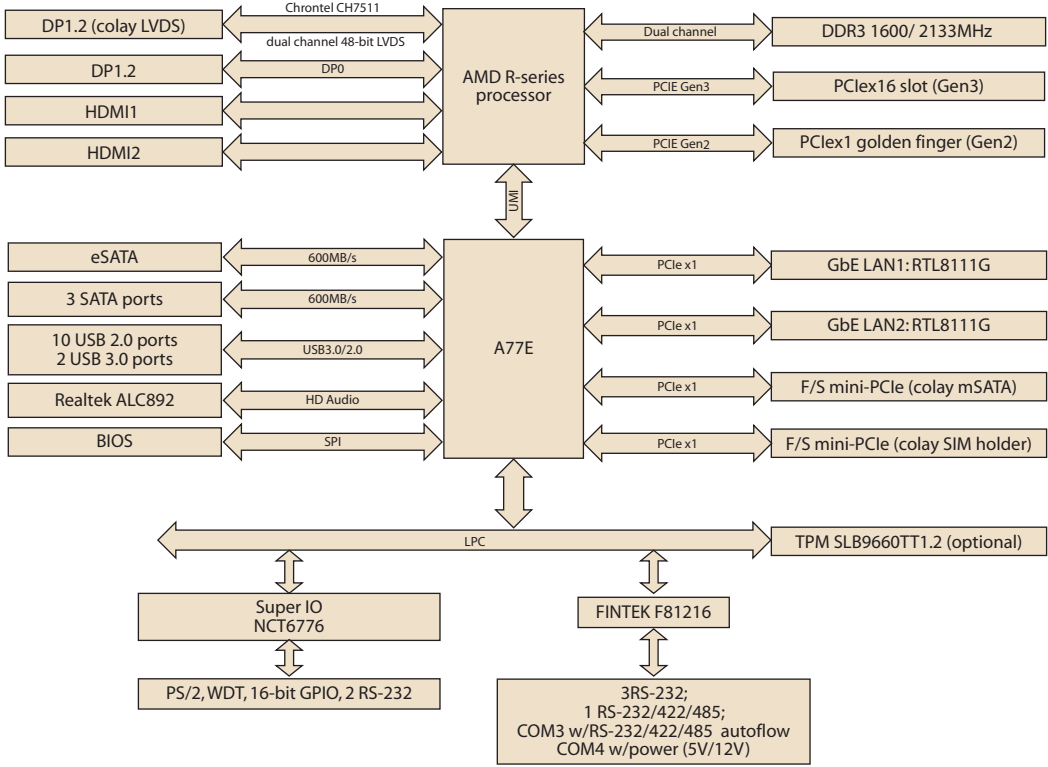

Ordering Information

Part Number	Chipset	Display	LAN	COM	TPM
AIMB-226G2-00A1E	RX-427BB	HDMI/DP (LVDS)	2	6	Yes (optional)
AIMB-226G2-01A1E	RX-225FB	HDMI/DP (LVDS)	2	6	Yes (optional)

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	3
1700018785	SATA power cable	1
1700008876	1-to-4 serial ports cable kit, 35 cm	1
1700024161-01	1-to-1 serial ports cable kit, 30 cm	1
1960061914N001	CPU cooler	1
1920000899T000	IO port bracket	1
2006B22610	Startup manual	1

I/O View



Optional Accessories

Part Number	Description
17AD14GS0000063V04	USB 2Ports cable w/o bracket, 25cm
1700024884-01	USB 2Ports cable with bracket, 25cm
1700023474-01	USB cable with two ports for AIMB-B2000, 34.5cm
1700000596	Power cable 3-pin 183cm, China type
1702031801	Power cable 3-pin 183cm, UK type
1702002600	Power cable 3-pin 183cm, USA type
1702002605	Power cable 3-pin 183cm, Europe type
1700023768-01	Phoenix to DC-in cable
96PSA-A120W12P4	Phoenix adaptor 100-240, 120W, 12V

Optional Chassis

Part Number	Description
AIMB-B2000-00YE	Mini-ITX chassis with optional DC Adaptor

Optional Riser Card

Part Number	Description
AIMB-R1201-02A1E	Riser for AIMB-226, 2 PCIe x1 A1-01

Embedded OS/API

OS/API	Part number	Description
WES7P	2070013904	WES7P x64 Embedded
WES7E	2070013905	WES7E x64 Embedded
WE8S	2070013903	WE8S x64 Embedded
Software API	NA	SUSI V4.0 SW API for AIMB-226 Win7

Block Diagram

AIMB-R1201-02A1E: Expansion Slot (golden-finger PCIe x1)

