



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AIMB-256

Intel® Core™2 Duo Socket 479 Mini-ITX
with CRT/DVI/LVDS, 4 COM and Dual LAN

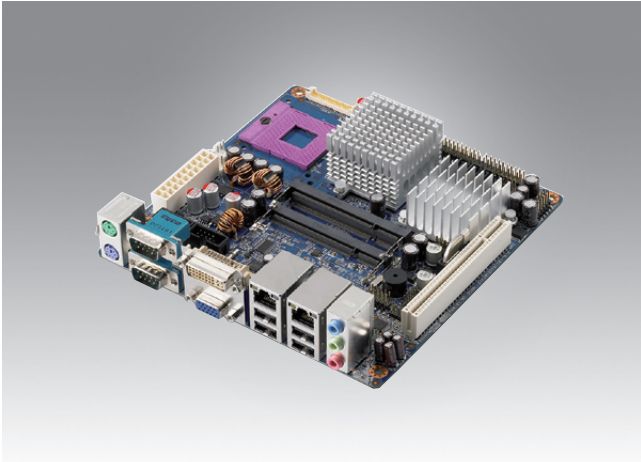

Features

- Supports Intel® Core™2 Duo/ Celeron® M mobile processor uFC-PGA 478 - GME965 and ICH8M
- Two 200-pin SODIMM sockets support up to 4 GB dual channel DDR2 533/667 MHz SDRAM
- Supports dual display for CRT, LVDS, and DVI
- Supports 4 serial ports, 3 SATA ports, 2 LAN ,CF and TPM1.2 (optional)
- Supports SUSIAccess and Embedded Software APIs


Software APIs:

Utilities:

Specifications

Processor System	CPU (65 nm μFC-PGA 478, Socket P)	Intel Core 2 Duo	Intel Celeron M	Intel ULV Core 2 Duo
	Max. Speed	T7500 2.2 GHz	550 2.0 GHz	U7500 1.06 GHz on board
	Front Side Bus	800 MHz	533 MHz	533 MHz
	L2 Cache	2 x 2 MB	1 MB	1 MB
	Chipset	Intel GME965 + ICH8M		
	BIOS	AMI 16 Mbit, SPI		
	Expansion Slot	PCI	32-bit/33 MHz, 1 slot	
Mini-PCI		-		
PCIe		-		
Memory	Technology	Dual channel DDR2 533/667 MHz SDRAM		
	Max. Capacity	4 GB		
	Socket	2 x 200-pin SODIMM (Non-ECC)		
Graphics	Controller	Intel GME965 GMCH integrated Graphics Media Accelerator X3100		
	VRAM	DVMT 4.0 supports shared system memory up to 384 MB video memory		
	LVDS	Single channel 18/24-bit/Dual channel 36/48-bit LVDS		
	TV-Out	-		
	DVI	Yes, via Chronitel CH7307C SDVO transmitter		
	Dual Display	CRT+LVDS, CRT+DVI, LVDS+DVI		
Ethernet	Interface	10/100/1000 Mbps		
	Controller	GbE LAN1: Realtek RTL8111E; GbE LAN2: Realtek RTL8111E		
	Connector	RJ-45 x 2		
SATA	Max Data Transfer Rate	300 MB/s		
	Channel	3		
EIDE	Mode	EIDE (Ultra DMA 100)		
	Channel	1		
SSD	CompactFlash	Supports CompactFlash Type I/II		
	CRT	1		
Rear I/O	DVI	1		
	Ethernet	2		
	USB	4 (USB 2.0 compliant)		
	Audio	3 (Mic-in, Line-out, Line-in)		
	Serial	2 (2 x RS-232, supplies 5 V & 12 V)		
	PS/2	2 (1 x keyboard and 1 x mouse)		
	LVDS	1		
	USB	6 (USB 2.0 compliant)		
Internal Connector	Serial	2 (2 x RS-232, supplies 5 V & 12 V)		
	IDE	1		
	SATA	3		
	CompactFlash	1		
	Parallel	-		
	IrDA	-		
	FDD	-		
	GPIO	8-bit		
	Watchdog Timer	Output	System reset	
Power Requirements	Interval	Programmable 1 ~ 255 sec/min		
	Power On	Intel Core 2 Duo T7300 2.0 GHz FSB 800 MHz, 2 GB DDR2 SDRAM		
Environment	Operating	+5 V	+3.3 V	+12 V
	Non-Operating	2.75 A	1.76 A	4.13 A
Physical Characteristics	Operating	0 ~ 60° C (32 ~ 140° F)		Non-Operating
	Non-Operating	-20 ~ 70° C (-4 ~ 158° F)		
Physical Characteristics	Dimensions	170 mm x 170 mm (6.69" x 6.69")		

Block Diagram

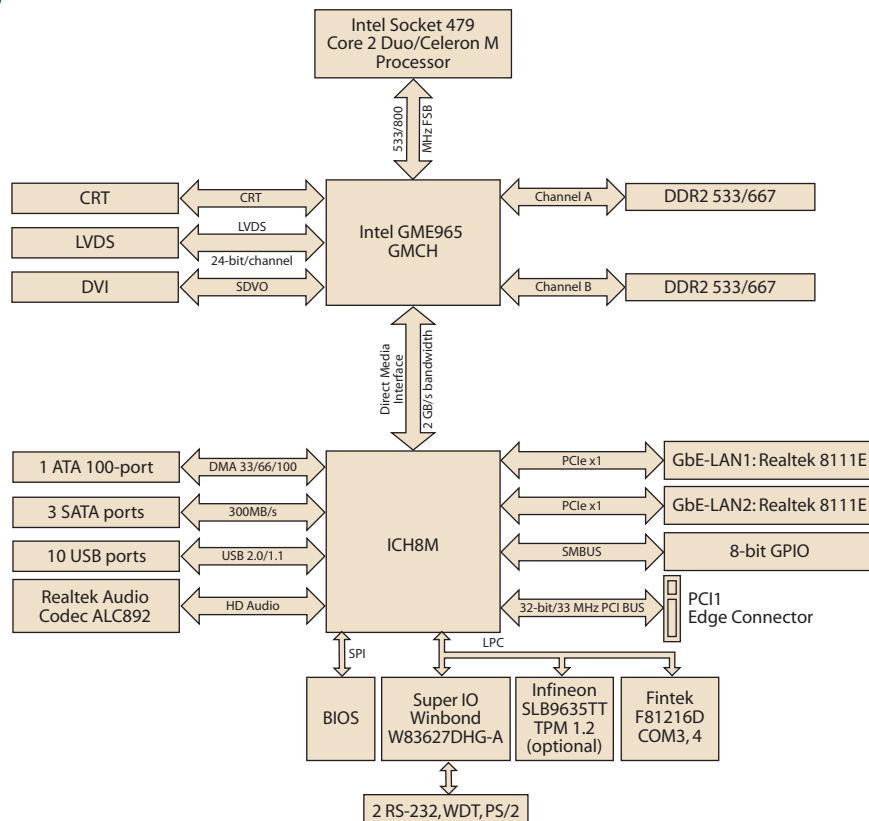

Ordering Information

Part Number	CPU	GbE	DVI	SATA
AIMB-256G2-00A1E	-	2	1	3

Optional Accessories

Part Number	Description
1700003195	USB cable with two ports, 17.5 cm
1700002204	USB cable with two ports, 27 cm
1700008461	USB cable with four ports, 30.5 cm

Packing List

Description	Quantity
AIMB-256 SBC	1
IDE HDD cable (40-pin)	1
SATA HDD data cable	2
SATA HDD power cable	2
Serial cables	2
CPU cooler	1
I/O port bracket	1
Startup manual	1
Driver CD	1

Embedded OS/API

OS/API	Part No.	Description
Win XPE	2070004369	XPE SP2 FP2007AIMB-256 V3.01 ENG
Software API	205E000021	SUSI 3.0 SW API for AIMB-256 XP

I/O View



AIMB-256G2-00A1E