



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# AIMB-281

Intel® Core™ i7/i5/i3/Celeron LGA1155  
Mini-ITX with CRT/DVI/LVDS, 6 COM,  
Dual LAN, PCIe x4

NEW

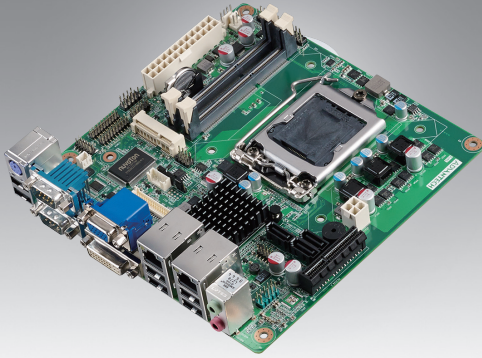

susiAccess



CE FCC

## Features

- Support Intel Core i7/i5/i3/ Pentium / Celeron desktop processor (LGA) with Intel H61 chipset
- Supports dual display for VGA, DVI, LVDS
- Support PCIe x4 (Gen 2) and mini PCIe
- Support 8 USB, 6 COMs, 3 SATA II, 8 bit GPIO
- Support embedded software APIs and Utilities
- Two 204-pin SO-DIMM up to 8GB DDR3 1066/1333/1600 MHz SDRAM

### Software APIs:



SMBus



H/W Monitor



Watchdog



GPIO



Brightness

### Utilities:



BIOS flash



Monitoring




Flash Lock

## Specifications

Processor System	CPU	Core i7-3770	Core i5-3550S	Core i3-3220	Pentium G2120	Celeron G1620
	Core Number	4	4	2	2	2
	Max Speed	3.9 GHz	3.7 GHz	3.3 GHz	3.1 GHz	2.7 GHz
	L3 Cache	8 MB	6 MB	3 MB	3 MB	2 MB
	Chipset	H61				
Expansion Slot	BIOS	AMI EFI 32 Mbit SPI				
	PCI	-				
Memory	Mini-PCIe	1, F/S support mSATA				
	PCIe x4 (Gen2)	8 GB/s per direction, 1 slot				
Graphics	Technology	Dual Channel DDR3 1066/1333/1600 MHz SDRAM				
	Max. Capacity	8 GB/4 GB per SO-DIMM				
	Socket	2x 204 PIN DDR3 SO-DIMM (Non-ECC)				
Ethernet	Controller	Intel HD P3000/ 4000 graphics engine supports up to DirectX 11, Shader Model 4.1 and OpenGL 3.0				
	VRAM	Share memory up to 256MB				
	CRT	Yes, supports max. resolution 2048 x 1536				
	LVDS	Support Dual channel 48 bit and up to 1920 x 1200				
	DVI	Yes, supports max resolution 1920 x 1200				
SATA	Dual Display	CRT+LVDS, CRT+DVI, DVI+LVDS				
	Interface	10/100/1000 Mbps				
	Controller	2 x RTL8111E				
Rear I/O	Connector	RJ-45 x 2				
	Max Data Transfer Rate	300 MB/s (SATA 2.0)				
	Channel	3				
	VGA	1				
	DVI	1				
	Ethernet	2				
Internal Connector	USB	6 (USB2.0)				
	Audio	2 (Mic-In, Line-out)				
	Serial	2 (1 x RS232, 1 x RS232/422/485)				
	PS/2	1				
	USB	2 (USB 2.0)				
Watchdog Timer	LVDS/ inverter	1/1				
	Serial	4 (RS-232)				
	IDE	-				
	SATA	3 (SATA 2.0)				
	Mini-PCIe	1				
	Parallel	1				
Power Requirements	IrDA	-				
	GPIO	8-bit				
Environment	Output	System reset				
	Interval	Programmable 1 ~ 255 sec/min				
Physical Characteristics	Power On	Intel Core i7-2700K 3.5GHz, 4GB DDR3 1333MHz SDRAM				
	+12V					+3.3V
	13.35A	+5V				2.19A
Environment	3.74A					
	Operating					Non-Operating
Physical Characteristics	Temperature	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution				-20 ~ 70° C (-4 ~ 158° F)
	Dimensions	170 mm x 170 mm (6.69" x 6.69")				

### Block Diagram

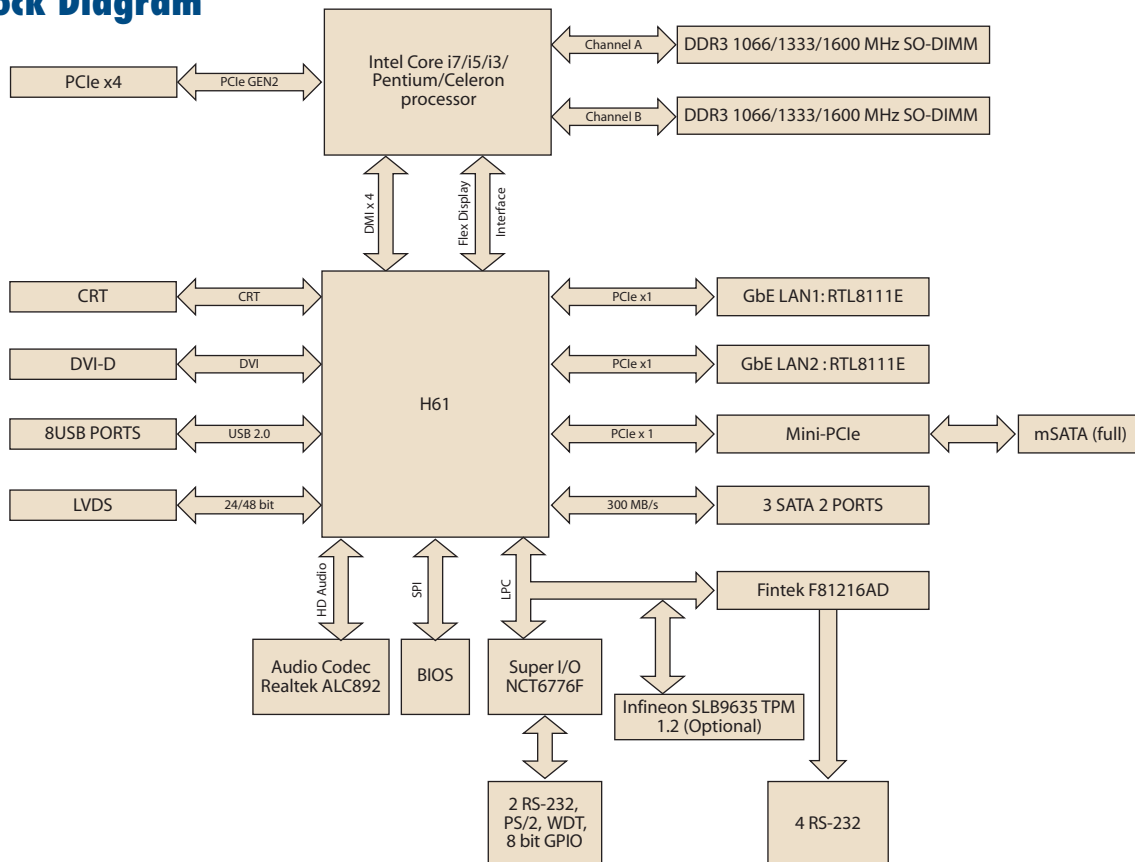

### Ordering Information

Part Number	Chipset	CRT	DVI	LVDS	GbE LAN	COM
AIMB-281G2-00A1E	H61	Yes	Yes	Yes	2	6

### Packing List

Part Number	Description	Quantity
1700021952-01	SATA HDD cable (180° ~ 90°)	1
17AD14GS0000074V04	SATA HDD cable (180° ~180°)	1
17AD14GS0000073V04	1-to-4 serial ports cable kit	1
1960062821T000	I/O port bracket	1
2006028110	Starup manual	1
2066028101	Driver CD	1

### I/O View



### Optional Accessories

Part Number	Description
17AD14GS0000063V04	USB 2 Port Cable w/o bracket PH=2.00mm L=25cm
19AD13GS0700149C13	CPU Cooler (for standard chassis)
1960060732N001*1+	CPU cooler solution (for AIMB-B2000)
1960064227N001*1	
1700025386-01	Transferred cable of system fan (for AIMB-B2000)
1700013714	LPT(parallel) cable

### Embedded OS/API

OS/API	Part Number	Description
Win XPE	2070012450	WES2009
	2070012451	WES7E x64 Embedded
WES7	2070012462	WES7E x86 Embedded
	2070012514	WES7P x86 Embedded
WES8.1	TBD	Win 8.1 Embedded
Software API	NA	SUSI 4.0 SW API for AIMB-281 XP+WIN7