



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AIMB-501

Intel® Core™ i7/i5/i3 LGA1155 MicroATX with CRT/DVI/LVDS, 10 COM, 10 USB 2.0, Dual LAN

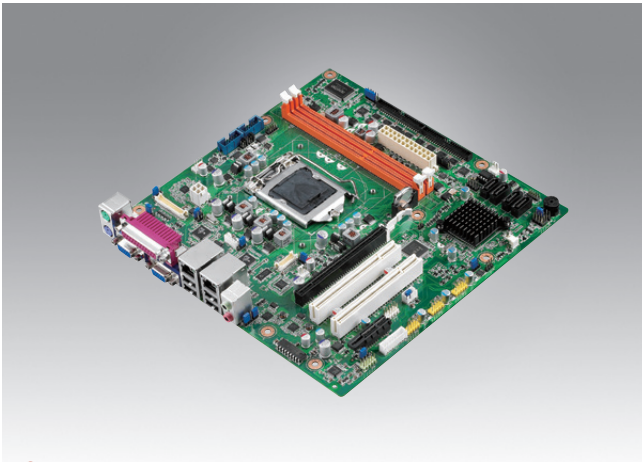

Features

- Supports Intel® Core™ i7/i5/i3 processor with H61 chipset
- Two DIMM sockets support up to 16 GB DDR3 1600/1333 MHz SDRAM
- Supports dual display of VGA, DVI, LVDS and two GbE LAN
- Supports 10 COM, LPT, TPM 1.2 (Optional)
- Supports 10 USB 2.0 or 2 USB 3.0 and 8 USB 2.0
- Supports SUSIAccess, McAfee, Acronis and Embedded Software APIs


Software APIs:

Utilities:

Specifications

	CPU	Intel Core i7-3770	Intel Core i5-3550S	Intel Core i3-3220	Intel Core i7-2600	Intel Core i5-2400	Intel Core i3-2120	Pentium G850	Celeron G540	
Processor System	Core Number	4	4	2	4	4	2	2	2	
	Max. Speed	3.4 GHz	3.0 GHz	3.3 GHz	3.4 GHz	3.1 GHz	3.3 GHz	2.9 GHz	2.50 GHz	
	Integrated Graphics	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	
	L3 Cache	8 MB	6 MB	3 MB	8 MB	6 MB	3 MB	3 MB	2 MB	
	Chipset	H61								
	BIOS	AMI EFI 64 Mbit SPI								
Expansion Slot	PCI	32-bit/33 MHz, 2 slots								
	PCIe x 1 (Gen2)	500MB/s per direction, 1 slot								
	PCIe x16 (Gen3)	16 GB/s per direction, 1 slot								
Memory	Technology	Dual Channel DDR3 1600/1333 MHz SDRAM								
	Max. Capacity	16 GB/8 GB per DIMM								
	Socket	2 x 240-pin DIMM (Non-ECC)								
Graphics	Controller	Intel HD Graphics								
	VRAM	1GB maximum shared memory with 2GB and above system memory installed								
	LVDS	Supports dual channel 48 bit up to 1920 x 1200								
	CRT	Yes, supports max. resolution 2048 x 1536								
	DVI	1 (A2E sku)								
	Dual Display	CRT1+LVDS, CRT1+DVI; CRT1+CRT2								
Ethernet	Interface	10/100/1000 Mbps								
	Controller	GbE LAN: Realtek 8111E								
	Connector	RJ-45 X 2								
SATA	Max Data Transfer Rate	300 MB/s (SATA 2.0)								
	Channel	4								
Rear I/O	CRT	2								
	DVI	1 (A2E sku)								
	Ethernet	2								
	USB	4 (A1E: USB 2.0 x 4, A2E: USB 2.0 x 2 /USB 3.0 x 2)								
	Parallel	1								
	Audio	2 (Mic-in, Line-out)								
	Serial	-								
	PS/2	2 (1 x keyboard and 1 x mouse)								
Internal Connector	USB	6 (USB 2.0)								
	Serial	10(8 x RS-232, 2 x RS-232/422/485; COM 3 and COM 7 support RS-232/422/485 auto flow control; COM 1 and COM 2 supported 5V/12V by jumper selection)								
	IDE	-								
	SATA	4 (SATA 2.0)								
	LVDS & Inverter	1								
	IrDA	-								
	GPIO	8-bit GPIO								
Watchdog Timer	Output	System reset								
	Interval	Programmable 1 ~ 255 sec/min								
Power Requirements	Power On	Intel Core i7-2600 3.4GHz, 4GB DDR3 1333MHz x 2pcs								
		+3.3 V +12 V -12 V 5 VSB 5 V								
		1.05 A	6.66 A	0.13 A	0.49 A	2.25 A				
Environment	Temperature	Operating						Non-Operating		
		0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution						-40 ~ 85° C (-40 ~ 185° F)		
Physical Characteristics	Dimensions	244 mm x 244 mm (9.6" x 9.6")								

Block Diagram

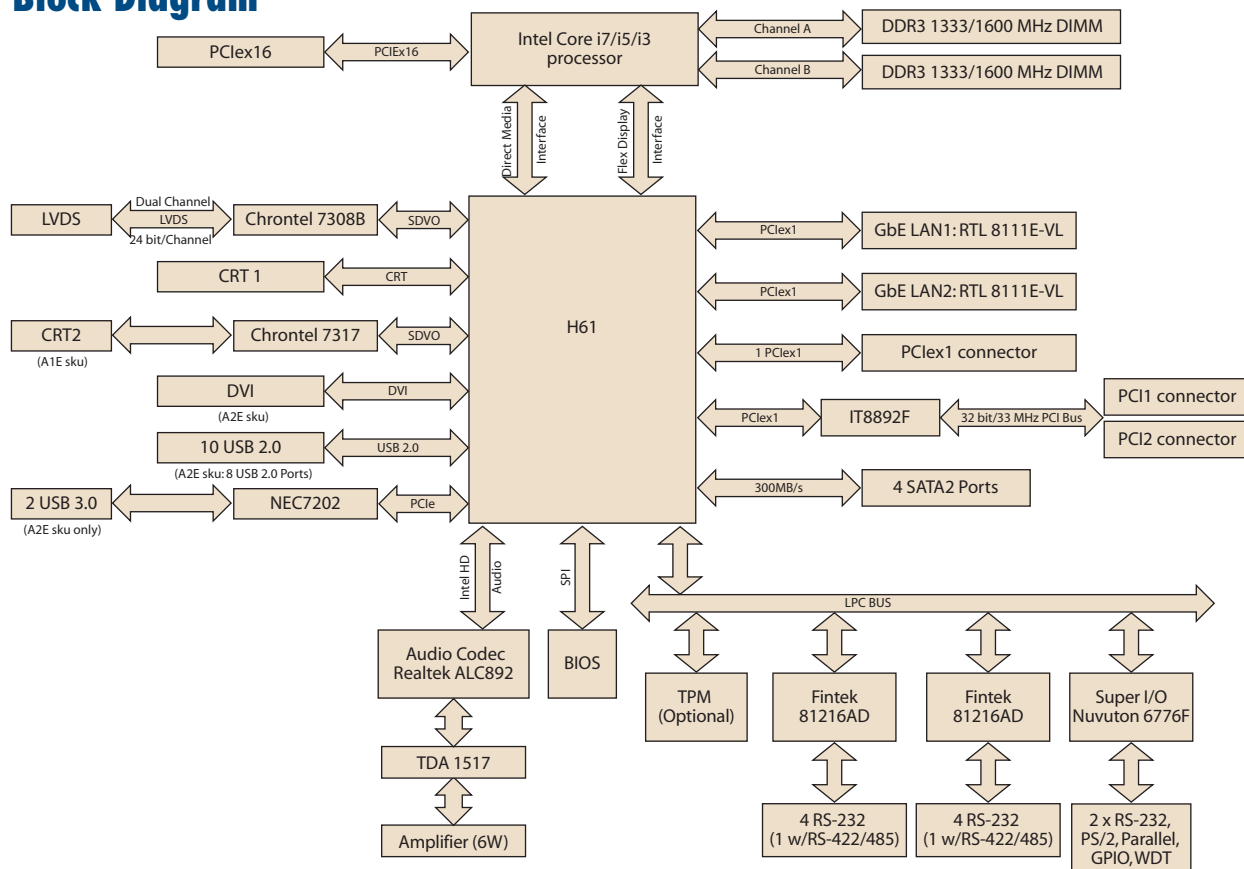

Ordering Information

Part Number	PCH	Memory	VGA	DVI	LVDS	USB 3.0/2.0	SATA 2.0	COM	TPM	LAN	PCIe x 16	PCIe x 1	PCI slot	AMP
AIMB-501G2-KSA1E	H61	Non ECC	2	(1)	1	0/10	4	10	(1)	2	1	1	2	Yes (6W)
AIMB-501VG-KSA1E	H61	Non ECC	1	(1)	0	0/10	4	10	(1)	1	1	1	0	Yes (6W)
AIMB-501L-KSA1E	H61	Non ECC	1	0	0	0/10	4	2	(1)	1	1	1	0	No
AIMB-501G2-KSA2E	H61	Non ECC	1	1	1	2/8	4	10	(1)	2	1	1	2	Yes (6W)

*() BOM options available on MP version.

Riser Card

Part Number	Description
AIMB-RP10P-01A1E	1U riser card with 1 PCI expansion
AIMB-RP30P-03A1E	2U riser card with 3 PCI expansion
AIMB-RP3PF-21A1E	2U riser card with 1 PCIe x16 and 2 PCI expansion
AIMB-RF10F-01A1E	1U riser card with 1 PCI e x 16 expansion

Packing List

Description	Quantity
Serial ATA HDD data cable	2
Com port cable kit	3
I/O port bracket	1
Startup manual	1
Driver CD	1

I/O View



AIMB-501G2-KSA1E

AIMB-501VG/L-KSA1E

AIMB-501G2-KSA2E

Optional Accessories

Part Number	Description
1700002204	USB cable with dual ports, 27 cm
1700008822	DVI cable
1960047669N001	LGA1156 CPU cooler for 4U and wallmount chassis
1700018699	KBMS cable 1*6P-2.5/DIN-6P(F)*2, 25 cm
1700000447	1-to-4 serial ports cable kit, 45cm
1701400181	1-to-4 serial ports cable kit, 18cm

Note: Purchasing AIMB-501's proprietary CPU cooler from Advantech is a must; other brands of CPU coolers are NOT compatible with AIMB-501

Embedded OS/API

OS/API	Part No	Description
WIN XPE	2070011383	Image XPE WES2009 AIMB-501KS V4.3 ENG
WES7	2070011384	Image WES7E AIMB-501KS V5.1.2 ENG