



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



AIMB-B2275

Embedded Mini-ITX Chassis with One Expansion Slot

NEW



Features

- Economical embedded chassis for Mini-ITX motherboard
- Front LED indicators for system fault detection
- One expansion slot (low profile)
- Reserved USB, COM, and WLAN antenna punchouts on front panel
- Two Shock Resistant 2.5" drive bays
- Two SKUs, to support both ATX power supply & AC-DC power adaptor



Specifications

Model Name	EPC-B2000				EPC-B2000				
Order Number	AIMB-B2275SG-15ZE				AIMB-B2275SG-00YE				
Drive Bay	Slim Optical Disk Drive and HDD				2.5" HDD*2 or 2.5" HDD*1 + slim ODD*1				
Cooling	Fan				2 (7cm/39.45CFM each) / 1 CPU Cooler				
System Spec	CPU	i7-6700	i7-6700TE	i5-6500	i5-6500TE	i3-6100	i3-6100TE	Pentium G4400/4400TE	Pentium G3900/3900TE
	Core Number	4	4	4	4	2	2	2 / 2	2 / 2
	Max Speed	3.4GHz	2.4GHz	3.2GHz	2.3GHz	TBD	2.7GHz	3.3GHz / 2.9GHz	2.8GHz / 2.6GHz
	TDP	65W	35W	65W	35W	51W	35W	54W / 35W	51W / 35W
	Memory	Two 260-pin SO-DIMM up to 32GB DDR4 2133 MHz SDRAM							
Front IO	USB	4 (Optional)				4 (Optional)			
	Serial	4 (Optional)				4 (Optional)			
	WLAN Antenna	2 (Optional)				2 (Optional)			
	Miscellaneous	Power and HDD LED x1, RST Button x1, Power Switch x1							
Rear IO	CRT	1				1			
	HDMI	1 (HDMI 2.0 or HDMI 1.2)				1 (HDMI 2.0 or HDMI 1.2)			
	Display Port 1.2	1				1			
	Ethernet	2				2			
	USB	4 (USB 2.0)				4 (USB 2.0)			
	Audio	3 (Mic in, Line out, Line in)				3 (Mic in, Line out, Line in)			
	Serial	1 (RS232, supports 5V/12V)				1 (RS232, supports 5V/12V)			
	Phoenix Connector	0				1			
	AC Power Input	1				0			
Expansion slot	1 (low profile)				1 (low profile)				
Environment	Operating Temperature	0 ~ 40 °C (32 ~ 104 °F)				0 ~ 40 °C (32 ~ 104 °F)			
	Non-operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)				-20 ~ 60 °C (-4 ~ 140 °F)			
	Humidity	10 ~ 85% @ 40 °C, non-condensing				10 ~ 85% @ 40 °C, non-condensing			
	Vibration (5 ~ 500 Hz)	1 Grms (HDD*1+ODD*1); 0.5 Grms (HDD*2)				1 Grms (HDD*1+ODD*1); 0.5 Grms (HDD*2)			
	Shock	10G (with 11ms duration, half sine wave)				10G (with 11ms duration, half sine wave)			
Physical Characteristics	Certification	CE/FCC/CCC				CE/FCC/CCC			
	Dimensions (W x H x D)	250 x 98 x 255 mm (9.84" x 3.86" x 10.04")				250 x 98 x 255 mm (9.84" x 3.86" x 10.04")			
	Weight	3.8 kg				3.1 kg			

* Top drive bay supports max. 12.5mm height HDD or slim ODD; Bottom drive bay supports max. 9.5mm height HDD.

Front View



Internal View




Rear View



Dimensions

Unit: mm [inch]

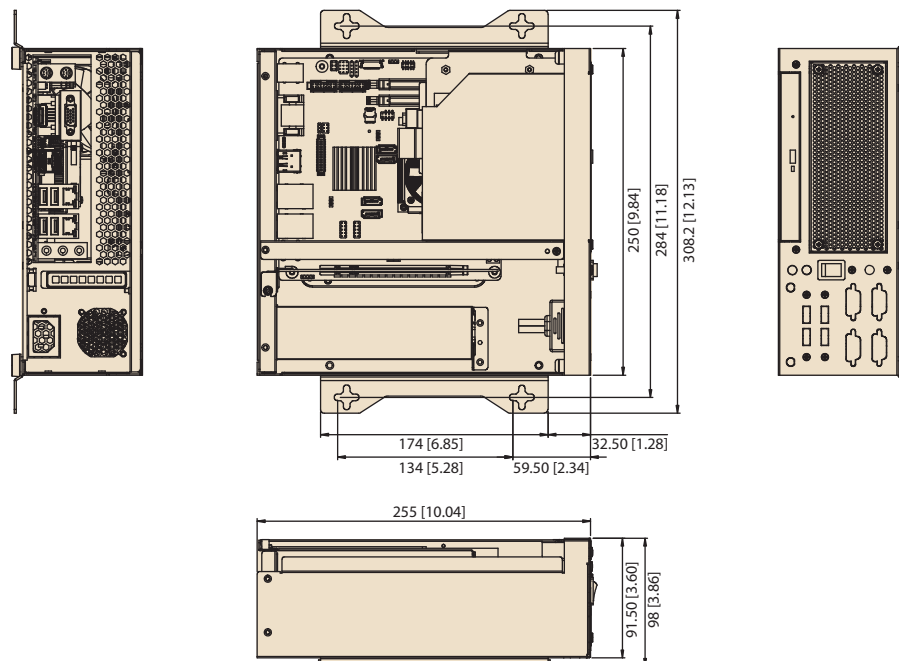

Ordering Information

Model Name	Part Number	Power Supply	Supported MB	Certification
EPC-B2000	AIMB-B2275SG-15ZE	ATX 150W	AIMB-275G2-00A1E	CE/FCC/CCC
	AIMB-B2275SG-00YE	Optional external AC-DC Adaptor 120W with Phoenix Connector	AIMB-275G2-00A1E	CE/FCC/CCC

Power Supply Options

Part Number	Watts	Input	Output	Safety
96PS-A150WFX-1	150 W	AC 100 ~ 240 V	+3.3 V @ 10 A, +5 A @ 13 A, +12 V @ 10 A, +5 vsb @ 2 A, -12 V @ 0.3 A	CE/FCC/CCC/UL/CB/TUV
96PSA-A120W12P4	120W	AC 100 ~ 240 V	12 V, 10A	CE/FCC/CCC/UL/CB/KC/PSE/GS/GOST R

Packing List

Part Number	Description	AIMB-B2000-15ZE	AIMB-B2000-00YE
		Quantity	
1700018910	SATA Cable	2	2
1700021185-01	SATA Power Cable (2 Ports)	1	0
1700023417-01	Fan cable 3p to 4p	2	1
1960057977N000	HDD Holder FOR AIMB-B2000	1	1
1990015239T000	Rubber Damper on HDD Holder	4	4
1990009411T000	Mylar 94X69 for HDD	2	2
1930004607	M3x4 Screws For HDD#1,#2	8	8
1930000002	M4x8 Screws For HDD Holder	4	4
1960014487T001	Wall Mount Bracket	2	2
1990012452S000	Rubber Foot	4	4
1930003238	M3x5 Screws For Rubber Foot/Wall Mount bracket	4	4
1935020330	M2x3 Screws For Slim ODD	4	4
1939000361	M3x6 Screws For Main Board	4	4
2066B20000	CD for AIMB-B2000 User Manual V1.00	1	1
2190000902	CARDBOARD-WARRANTY REV. A2	1	1

Optional Accessories

Part Number	Description
96SDVR-8X-ST-HL-B	Slim DVD-ROM
1700023474-01	2 port USB cable, F10p/2.0, lock 10-pin(right-up), 345 mm
1700018971	SATA HDD cable for AIMB-226/231/281/203/274
1700011772	SATA power cable for slim ODD for AIMB-274/273/272/270/203 with AIMB-B2000-15ZE
1700023646-01	SATA power cable for slim ODD for AIMB-231/230/225/224/223/215/214/213 with AIMB-B2000-00YE
1700023647-01	SATA power cable for slim ODD for AIMB-212 with AIMB-B2000-00YE
1700000596	Power cable 3-pin 183cm, China type
1702031801	Power cable 3-pin 183cm, UK type
1702002600	Power cable 3-pin 183cm, USA type
1702002605	Power cable 3-pin 183cm, Europe type