



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



IEEE 1394 Cable 6/6

Cable for connecting IEEE 1394-compatible devices, e.g. video cameras, external CD/DVD equipment, etc.. Maximum data transfer rate 400 Mbps.
1394 connector ⇔ 1394 connector



AK-1394-10	6PIN ⇔ 6PIN, 1,0 m
AK-1394-18	6PIN ⇔ 6PIN, 1,8 m
AK-1394-30	6PIN ⇔ 6PIN, 3,0 m
AK-1394-50	6PIN ⇔ 6PIN, 5,0 m

IEEE 1394 Cable 6/4

Cable for connecting IEEE 1394-compatible devices, e.g. video cameras, external CD/DVD equipment, etc.. Maximum data transfer rate 400 Mbps.
1394 connector ⇔ 1394 mini connector



Sample only

AK-1394-104	6PIN ⇔ 4PIN, 1,0 m
AK-1394-184	6PIN ⇔ 4PIN, 1,8 m
AK-1394-304	6PIN ⇔ 4PIN, 3,0 m
AK-1394-504	6PIN ⇔ 4PIN, 5,0 m

IEEE 1394 Cable 4/4

Cable for connecting IEEE 1394 compatible devices, e.g. video cameras, external CD/DVD equipment, etc.. Maximum data transfer rate 400 Mbps.
1394 connector ⇔ 1394 mini connector




Sample only

AK-1394-1044	4PIN ⇔ 4PIN, 1,0 m
AK-1394-1844	4PIN ⇔ 4PIN, 1,8 m
AK-1394-3044	4PIN ⇔ 4PIN, 3,0 m
AK-1394-5044	4PIN ⇔ 4PIN, 5,0 m

IEEE 1394 Adaptor

AB-1394-1: 6-pin female ⇔ 4-pin male
AB-1394-2: 6-pin female ⇔ 6-pin female

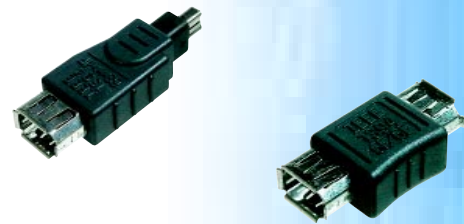

AB-1394-1	IEEE 1394 Adaptor
AB-1394-2	IEEE 1394 Adaptor

USB Adaptor

Various types, straight version, molded.



A-USB-1	USB A female ⇔ USB B female
A-USB-2	USB A female ⇔ USB B male
A-USB-3	USB A male ⇔ USB B female

USB Adaptor

Various types, angled version, molded.



A-USB-4	USB A female ⇔ USB A female
A-USB-5	USB A male ⇔ USB A male
A-USB-6	USB B male ⇔ USB B male

USB Plugs and Hoods

Plugs and hoods for self assembly of USB cables.



A-USBPA	USB A male, Solder Version
A-USBPB	USB B male, Solder Version
A-USBPA-HOOD	Hood for USB A male
A-USBPB-HOOD	Hood for USB B male

USB Sockets

USB sockets for PCB mounting.



A-USBSA	USB A female, PCB mounting, 90° angled
A-USBSB	USB B female, PCB mounting, 90° angled