



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ALM-32120

0.7GHz – 1.0GHz

2 Watt High Linearity Amplifier



Data Sheet


Description

Avago Technologies' ALM-32120 is a high linearity 2 Watt PA with good OIP3 performance and exceptionally good PAE at 1dB gain compression point, achieved through the use of Avago Technologies' proprietary 0.25um GaAs Enhancement-mode pHEMT process.

All matching components are fully integrated within the module. This makes the ALM-32120 extremely easy to use. The adjustable temperature-compensated internal bias circuit allows the device to be operated at either class A or class AB operation. The ALM-32120 is housed inside a miniature 7.0 x 10.0 x 1.1 mm³ 20-lead multiple-chips-on-board (MCOB) module package.

Component Image

7.0 x 10.0 x 1.1mm³ 20-Lead MCOB Package

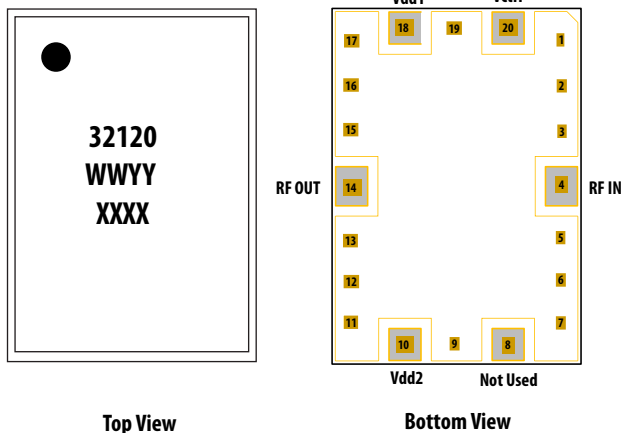

Note:
Package marking provides orientation and identification
"32120" = Device Part Number
"WWYY" = Work week and year of manufacture
"XXXX" = Last 4 digit of lot number

Features

- Fully matched, input and output
- High linearity and P1dB
- Unconditionally stable across load condition
- Built-in adjustable temperature compensated internal bias circuitry
- GaAs E-pHEMT Technology^[1]
- 5V supply
- Excellent uniformity in product specifications
- Tape-and-Reel packaging option available
- MSL-3 and Lead-free
- High MTTF for base station application

Specifications

900MHz; 5V, 800mA (typical)

- 14.3 dB Gain
- 52.0 dBm Output IP3
- 34.4 dBm Output Power at 1dB Gain Compression
- 50.3% PAE at P1dB
- 2.5dB Noise Figure

Applications

- Class A driver amplifier for GSM / W-CDMA / WiMAX base stations.
- General purpose gain block.

Note:

1. Enhancement mode technology employs positive gate voltage, thereby eliminating the need of negative gate voltage associated with conventional depletion mode devices.
2. Good RF practice requires all unused pins to be earthed.



Attention: Observe precautions for handling electrostatic sensitive devices.
ESD Machine Model = 100 V
ESD Human Body Model = 350 V
Refer to Avago Application Note A004R:
Electrostatic Discharge, Damage and Control.

Absolute Maximum Rating^[2] T_A=25°C

| Symbol | Parameter | Units | Absolute Max. |
|-----------------------|--|-------|---------------|
| V _{dd,max} | Device Voltage, RF output to ground | V | 5.5 |
| I _{ds,max} | Device Drain Current | mA | 1500 |
| V _{ctrl,max} | Control Voltage | V | 5.5 |
| P _{in,max} | CW RF Input Power | dBm | 28 |
| P _{diss} | Total Power Dissipation ^[4] | W | 8.25 |
| T _{j,max} | Junction Temperature | °C | 150 |
| T _{STG} | Storage Temperature | °C | -65 to 150 |

Thermal Resistance^[3] $\theta_{jc} = 12^{\circ}\text{C}/\text{W}$
(V_{dd}=5, I_{ds}=800mA, T_c=85°C)

Notes:

2. Operation of this device in excess of any of these limits may cause permanent damage.
3. Thermal resistance measured using Infra-Red measurement technique.
4. This is limited by maximum V_{dd} and I_{ds}. Derate 83.3mW/°C for T_c > 51.0°C.

Product Consistency Distribution Charts^[5]

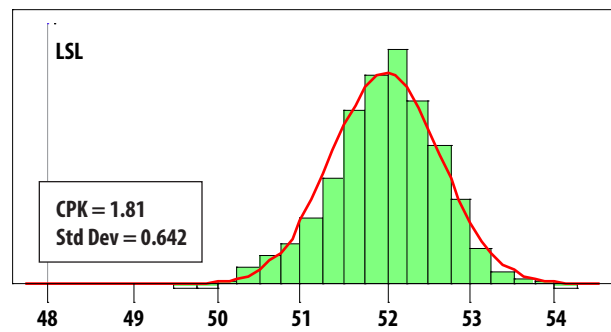
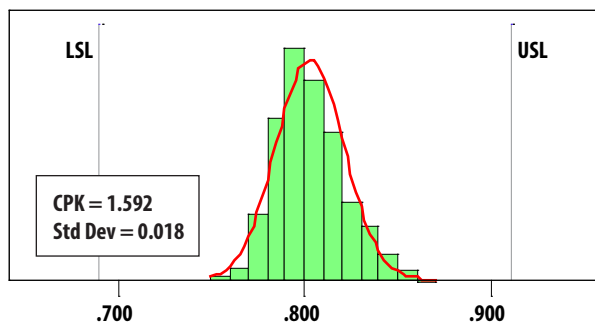


Figure 1. I_{ds}; LSL = 690mA, nominal = 800mA, USL = 910mA

Figure 2. OIP3; LSL = 48dBm, nominal = 52dBm



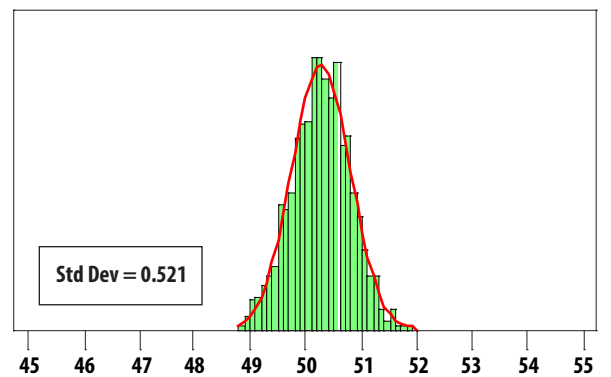


Figure 3. P1dB; LSL = 33dBm, nominal = 34.4dBm

Figure 4. PAE at P1dB; nominal = 50.3%

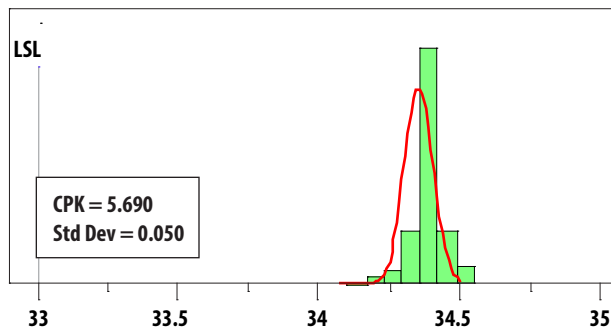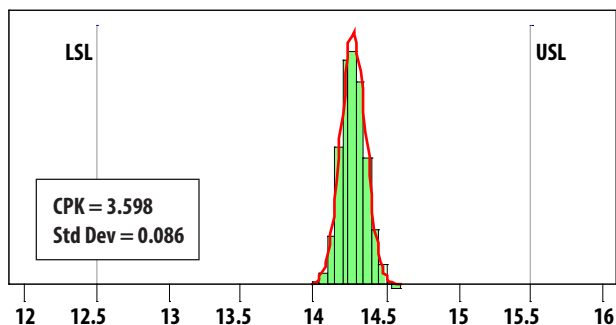

Note:

5. Distribution data sample size is 500 samples taken from 3 different wafer lots. T_A = 25°C, V_{dd} = 5V, V_{ctrl} = 5V, RF performance at 900MHz unless otherwise specified. Future wafers allocated to this product may have nominal values anywhere between the upper and lower limits.
6. Measurements are made on a production test board. Input trace losses have not been de-embedded from actual measurements.

Electrical Specifications [7]

$T_A = 25\text{ }^{\circ}\text{C}$, $V_{dd} = 5\text{V}$, $V_{ctrl} = 5\text{V}$, RF performance at 900MHz, measured on demo board (see Figure 7) unless otherwise specified.

| Symbol | Parameter and Test Condition | Units | Min. | Typ. | Max. |
|------------|---------------------------------------|-------|------|-------|------|
| I_{ds} | Quiescent current | mA | 690 | 800 | 910 |
| I_{ctrl} | V_{ctrl} current | mA | - | 18 | - |
| Gain | Gain | dB | 12.5 | 14.3 | 15.5 |
| OIP3 [8] | Output Third Order Intercept Point | dBm | 48.0 | 52.0 | - |
| OP1dB | Output Power at 1dB Gain Compression | dBm | 33.0 | 34.4 | - |
| PAE | Power Added Efficiency | % | - | 50.3 | - |
| NF | Noise Figure | dB | - | 2.5 | - |
| S11 | Input Return Loss, 50 Ω source | dB | - | -26.0 | - |
| S22 | Output Return Loss, 50 Ω load | dB | - | -10.0 | - |
| S12 | Reverse Isolation | dB | - | -22.0 | - |

Notes:

7. Measurements at 900MHz obtained using demo board described in Figure 6 and 7.

8. OIP3 test condition: $F_{RF1} - F_{RF2} = 10\text{MHz}$ with input power of -5dBm per tone measured at worst side band


9. Use proper biasing, heat sink and de-rating to ensure maximum channel temperature is not exceeded. See absolute maximum ratings and application note (if applicable) for more details.

Sparameter^[1] (Vdd = 5V, Vctrl = 5V, T= 25C, matched 50W)

| | | | | | | | | |
|-----|--------|---------|--------|---------|--------|---------|--------|---------|
| 0.1 | -0.36 | 164.60 | -77.49 | -145.80 | -79.70 | 109.10 | -0.17 | -174.30 |
| 0.2 | -0.53 | 148.70 | -56.07 | -21.56 | -86.25 | -176.20 | -0.25 | 163.70 |
| 0.3 | -0.77 | 128.90 | -27.42 | -85.28 | -86.23 | -94.28 | -0.37 | 144.60 |
| 0.4 | -1.35 | 98.98 | -4.25 | -159.20 | -52.39 | 165.80 | -0.95 | 118.30 |
| 0.5 | -7.59 | 60.56 | 13.47 | 65.72 | -31.22 | 34.32 | -5.87 | 103.20 |
| 0.6 | -10.88 | 13.72 | 15.06 | -58.78 | -26.64 | -84.87 | -4.90 | 67.67 |
| 0.7 | -22.50 | -70.74 | 15.65 | -145.20 | -23.50 | -167.40 | -10.62 | 4.84 |
| 0.8 | -18.23 | -132.30 | 14.90 | 144.20 | -22.08 | 125.00 | -12.19 | -81.60 |
| 0.9 | -19.56 | 165.20 | 13.91 | 84.34 | -21.18 | 67.81 | -10.33 | -130.30 |
| 1 | -20.69 | 10.26 | 12.92 | 28.88 | -20.49 | 14.40 | -9.00 | -156.70 |
| 1.1 | -11.62 | -42.88 | 11.78 | -26.18 | -20.12 | -38.92 | -8.99 | 165.20 |
| 1.2 | -6.80 | -60.83 | 10.06 | -85.53 | -20.48 | -96.68 | -13.70 | 75.61 |
| 1.3 | -3.03 | -83.08 | 6.50 | -145.10 | -22.80 | -155.00 | -9.19 | -54.22 |
| 1.4 | -1.58 | -104.40 | 2.37 | 163.00 | -25.71 | 154.10 | -7.58 | -110.60 |
| 1.5 | -1.09 | -118.40 | -1.79 | 98.91 | -28.68 | 90.79 | -15.24 | -75.21 |
| 1.6 | -0.58 | -128.90 | -11.65 | 33.49 | -37.27 | 25.86 | -2.73 | -81.83 |
| 1.7 | -0.41 | -138.10 | -23.25 | 1.95 | -47.31 | -6.07 | -1.03 | -108.90 |
| 1.8 | -0.31 | -145.50 | -33.90 | -14.20 | -55.72 | -25.18 | -0.59 | -124.00 |
| 1.9 | -0.25 | -151.30 | -44.51 | -21.39 | -63.23 | -34.98 | -0.43 | -133.90 |
| 2 | -0.24 | -156.10 | -56.40 | -14.79 | -69.27 | -53.85 | -0.35 | -141.00 |
| 2.1 | -0.20 | -160.50 | -66.55 | 47.56 | -72.69 | -64.11 | -0.28 | -146.60 |
| 2.2 | -0.20 | -164.40 | -63.33 | 69.07 | -78.37 | -71.26 | -0.25 | -151.50 |
| 2.3 | -0.20 | -168.30 | -60.79 | 48.37 | -74.70 | -61.79 | -0.23 | -155.80 |
| 2.4 | -0.17 | -171.60 | -58.09 | -10.63 | -73.48 | -66.19 | -0.20 | -159.40 |
| 2.5 | -0.19 | -174.90 | -57.79 | -50.33 | -71.64 | -77.39 | -0.20 | -162.70 |
| 2.6 | -0.16 | -178.00 | -57.94 | -70.06 | -69.99 | -91.17 | -0.18 | -165.80 |
| 2.7 | -0.15 | 179.20 | -57.89 | -83.12 | -70.88 | -96.93 | -0.17 | -168.40 |
| 2.8 | -0.18 | 176.30 | -58.02 | -90.09 | -70.23 | -104.60 | -0.18 | -171.10 |
| 2.9 | -0.15 | 173.60 | -57.95 | -96.92 | -69.60 | -111.70 | -0.15 | -173.50 |
| 3 | -0.16 | 171.10 | -57.89 | -100.10 | -70.57 | -115.10 | -0.15 | -175.60 |
| 3.1 | -0.17 | 168.50 | -57.91 | -103.00 | -69.95 | -119.20 | -0.15 | -177.90 |
| 3.2 | -0.16 | 166.10 | -57.65 | -105.90 | -68.08 | -127.10 | -0.13 | -179.80 |
| 3.3 | -0.19 | 163.60 | -57.75 | -112.10 | -67.38 | -130.10 | -0.16 | 178.20 |
| 3.4 | -0.18 | 161.00 | -57.97 | -117.50 | -67.60 | -138.20 | -0.13 | 176.30 |
| 3.5 | -0.19 | 158.80 | -57.68 | -119.50 | -67.72 | -136.90 | -0.14 | 174.70 |
| 3.6 | -0.21 | 156.20 | -57.97 | -122.60 | -67.79 | -147.60 | -0.15 | 172.70 |
| 3.7 | -0.20 | 153.70 | -57.97 | -125.10 | -67.31 | -141.60 | -0.13 | 171.00 |
| 3.8 | -0.24 | 151.30 | -57.78 | -128.00 | -67.49 | -152.00 | -0.16 | 169.40 |
| 3.9 | -0.25 | 148.50 | -57.98 | -130.00 | -67.36 | -152.30 | -0.15 | 167.50 |
| 4 | -0.25 | 146.10 | -57.19 | -134.30 | -66.56 | -157.40 | -0.15 | 166.10 |
| 4.5 | -0.37 | 131.30 | -55.93 | -148.90 | -67.62 | -162.70 | -0.16 | 157.70 |
| 5 | -0.54 | 112.40 | -52.75 | -161.30 | -61.05 | -149.90 | -0.18 | 149.10 |
| 6 | -1.31 | 57.75 | -36.84 | 119.20 | -43.31 | 134.30 | -0.30 | 130.10 |
| 7 | -1.75 | -5.91 | -25.43 | -103.50 | -30.13 | -95.82 | -0.90 | 107.30 |
| 8 | -1.36 | -69.92 | -34.01 | 94.13 | -35.78 | 100.80 | -0.67 | 86.92 |
| 9 | -1.02 | -111.50 | -36.45 | -0.24 | -37.34 | -5.81 | -2.44 | 58.70 |
| 10 | -0.93 | -136.10 | -49.58 | 38.47 | -49.71 | 53.66 | -1.20 | 29.50 |
| 11 | -1.24 | -158.60 | -36.10 | -4.27 | -36.25 | 4.36 | -1.11 | -10.97 |
| 12 | -4.37 | 176.10 | -27.41 | -70.22 | -26.50 | -65.85 | -1.49 | -48.17 |
| 13 | -5.23 | -156.20 | -18.05 | -170.90 | -17.96 | -175.00 | -2.30 | -75.19 |
| 14 | -2.74 | 179.20 | -17.78 | 96.03 | -17.52 | 91.37 | -2.16 | -116.00 |
| 15 | -2.88 | 164.30 | -15.40 | -18.00 | -15.14 | -24.63 | -10.87 | -91.48 |
| 16 | -5.02 | 130.20 | -19.39 | -121.50 | -19.04 | -129.90 | -7.49 | -118.10 |
| 17 | -16.28 | 76.22 | -18.49 | 174.80 | -18.28 | 166.80 | -3.90 | -118.90 |
| 18 | -13.73 | 170.50 | -23.90 | 51.96 | -23.51 | 45.64 | -2.30 | -108.60 |
| 19 | -13.73 | 22.08 | -33.75 | 15.05 | -32.94 | 7.26 | -1.52 | -125.50 |
| 20 | -4.08 | -104.40 | -27.59 | -36.88 | -27.04 | -46.50 | -1.26 | -137.60 |
| 20 | -2.68 | 117.40 | -45.43 | -140.20 | -47.37 | -116.90 | -0.96 | -151.30 |

Notes:

1. S-parameters are measured on a CPWG line fabricated on 0.010 inch thick Rogers® RO4350 material using TRL calibration technique. The input reference plane is at the end of the input lead whereas the output reference plane is at the end of the output lead.

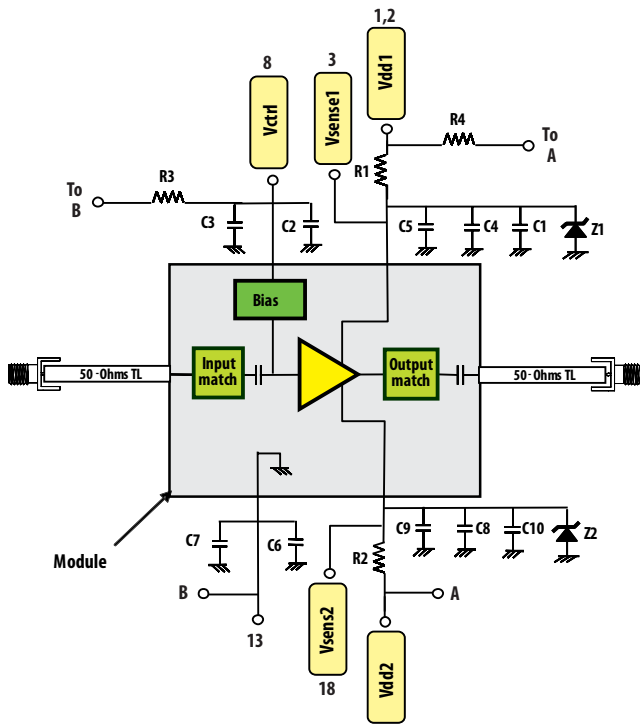

| Circuit Symbol | Size | Value | Description |
|----------------|------|----------|-----------------------------|
| C1, C10 | 0805 | 2.2uF | Ceramic Chip Capacitor |
| C2, C4, C9 | 0402 | 0.1 uF | Ceramic Chip Capacitor |
| C3, C5, C8 | 0402 | 10nF | Ceramic Chip Capacitor |
| C6, C7 | 0402 | Not Used | N/A |
| R1, R2 | 1206 | 0 Ohm | Chip Resistor |
| R3 | 0402 | Not Used | N/A |
| R4 | 0805 | 0 Ohm | Chip Resistor |
| Z1, Z2 | 0805 | Not Used | Zener Diode 5.6V (Optional) |

Note:

To supply Vdd1 and Vdd2 individually, remove R4 and supply Vdd1 from pin 1,2 and Vdd2 from pin 19,20

Figure 6. Demo board application schematics and components table

Demo board layout

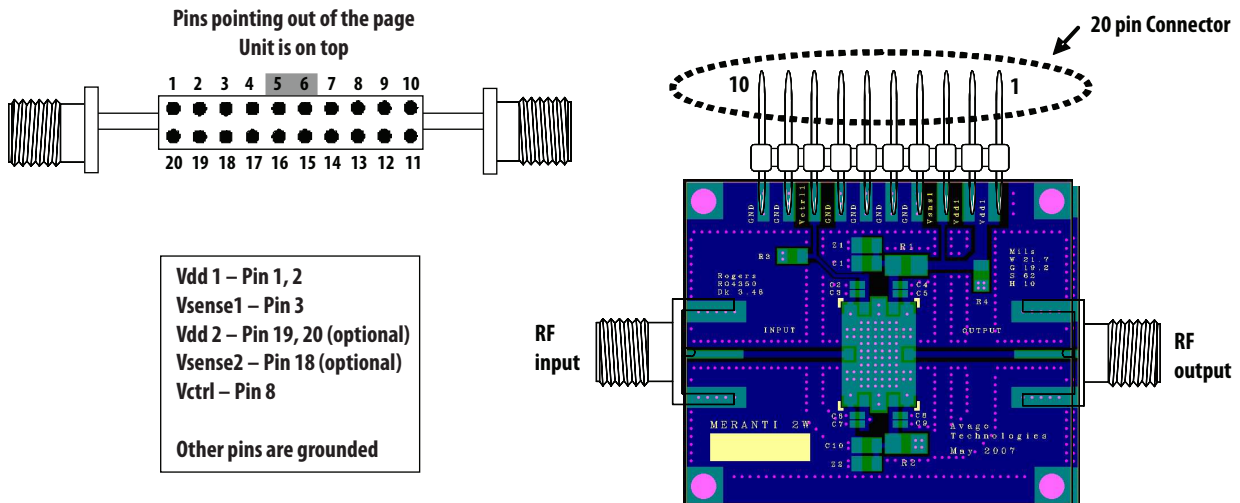


Figure 7. Demo board layout diagram

1. Recommended PCB material is 10 mils Rogers RO4350, with FR4 backing for mechanical strength.
2. Suggested component values may vary according to layout and PCB material.

ALM-32120 Typical Over-Temperature Performance

Vdd = 5V, Vctrl = 5V, Input Signal = CW unless stated otherwise.

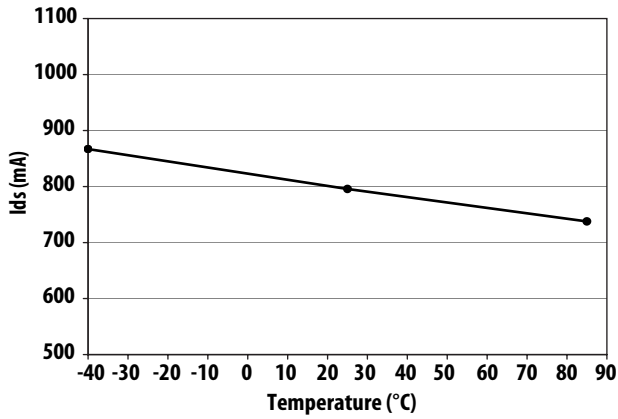


Figure 8. Over temperature Ids

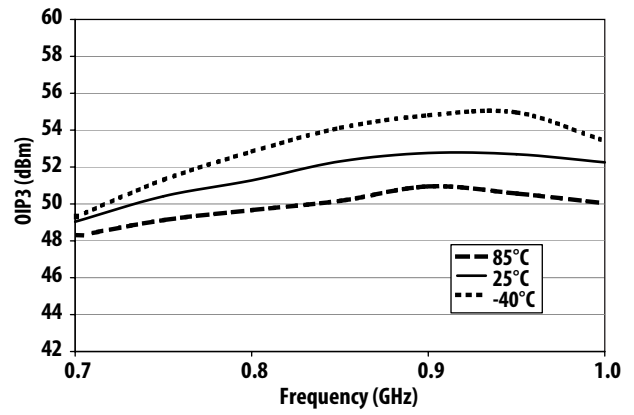


Figure 9. Over temperature OIP3 vs Frequency

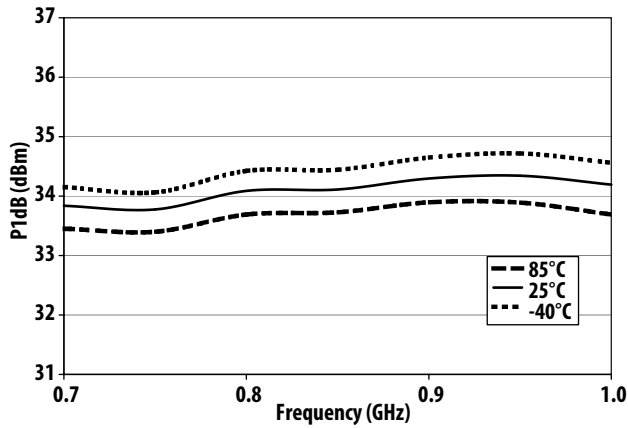


Figure 10. Over temperature P1dB vs Frequency

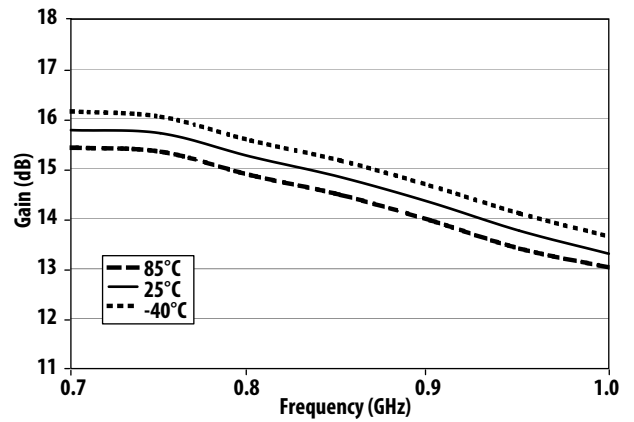


Figure 11. Over temperature Gain vs Frequency

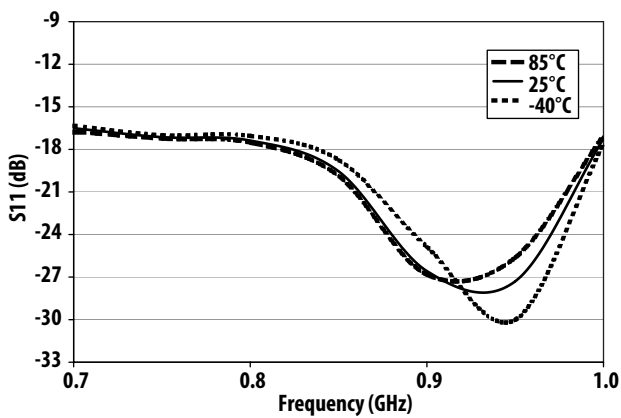


Figure 12. Over temperature S11 vs Frequency

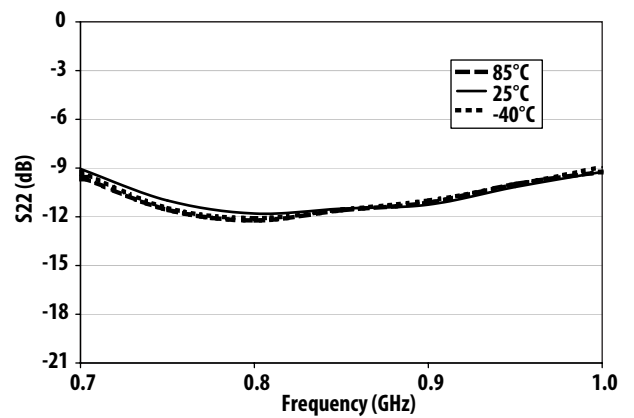


Figure 13. Over temperature S22 vs Frequency

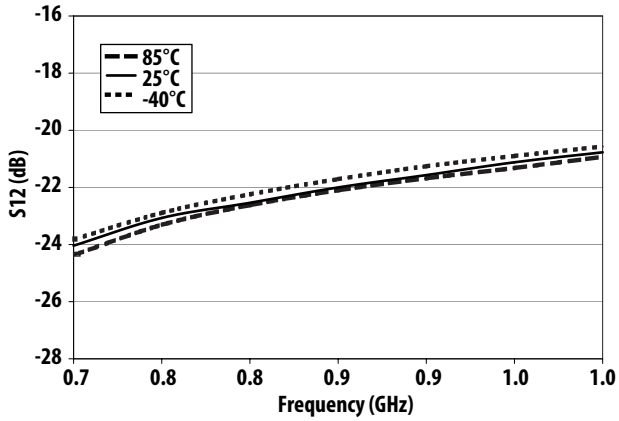


Figure 14. Over temperature S12 vs Frequency

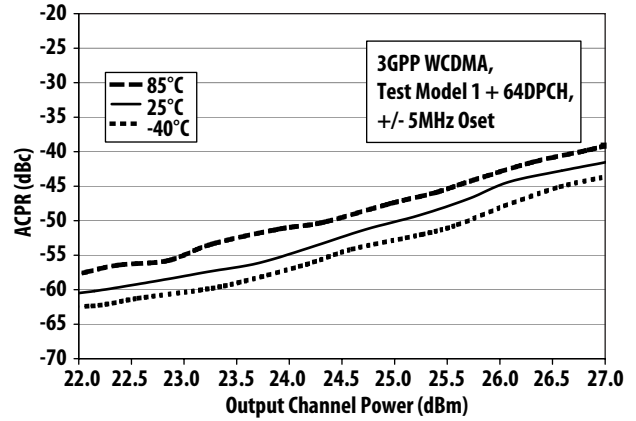


Figure 15. Over temperature WCDMA ACPR vs Channel Power @ 900MHz

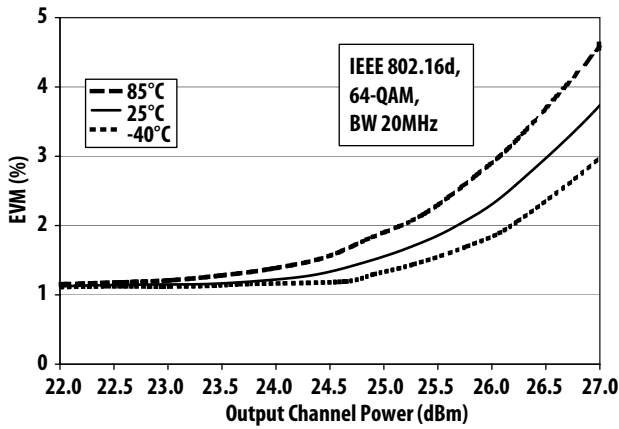


Figure 16. Over temperature WiMAX EVM vs Output Power @ 700MHz



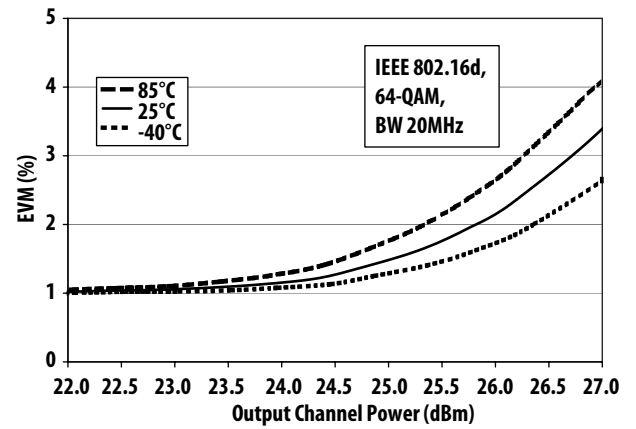


Figure 17. Over temperature WiMAX EVM vs Output Power @ 800MHz

PCB Layout and Stencil Design

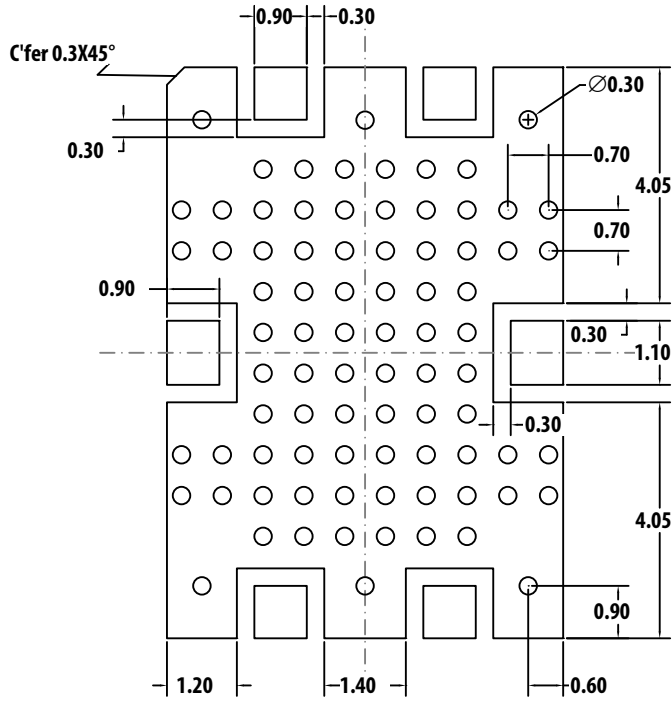


PCB Land Pattern (Top View)

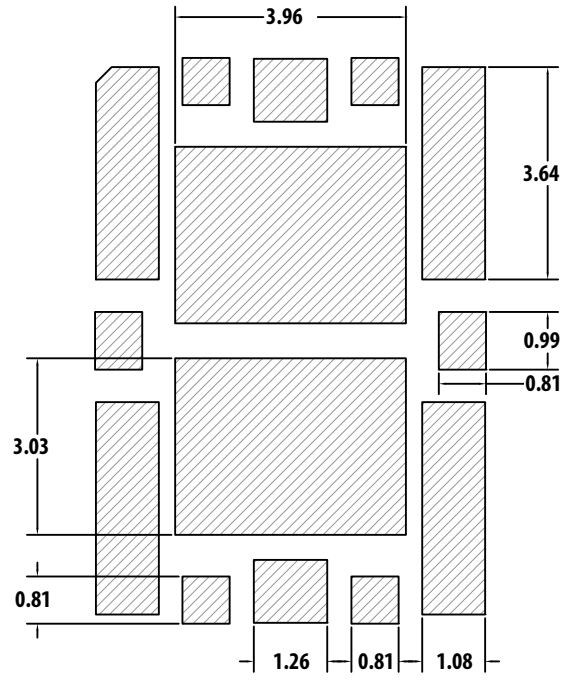

Stencil Outline

Note: All dimensions are in millimeters.

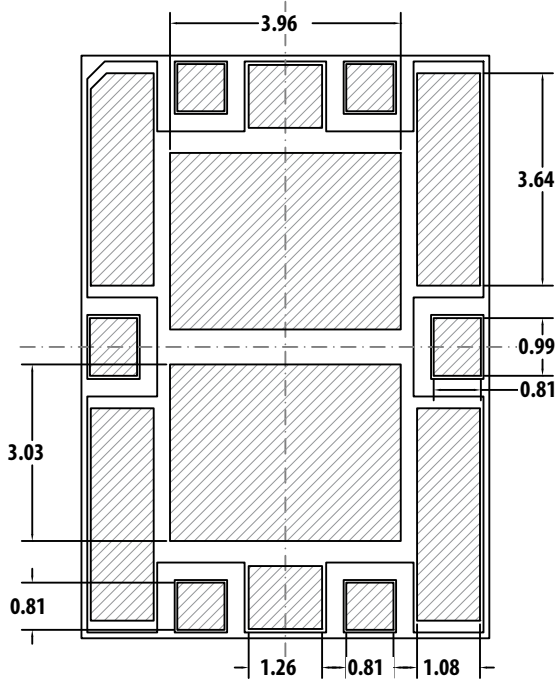

Combined PCB and stencil layout Land Pattern (Top View)



Part Number Ordering Information

| Part Number | No. of Devices | Container |
|----------------|----------------|----------------|
| ALM-32120-TR1G | 1000 | 13" Reel |
| ALM-32120-TR2G | 3000 | 13" Reel |
| ALM-32120-BLKG | 100 | antistatic bag |

Product Family

| Output Power | Frequency Band | | |
|--------------|----------------|------------|------------|
| | 700MHz-1GHz | 1.7-2.7GHz | 3.3-3.9GHz |
| 0.5W | MGA-30116 | MGA-30216 | MGA-30316 |
| 1W | ALM-31122 | ALM-31222 | ALM-31322 |
| 2W | ALM-32120 | ALM-32220 | ALM-32320 |


MCOB 7 x 10 Package Dimensions

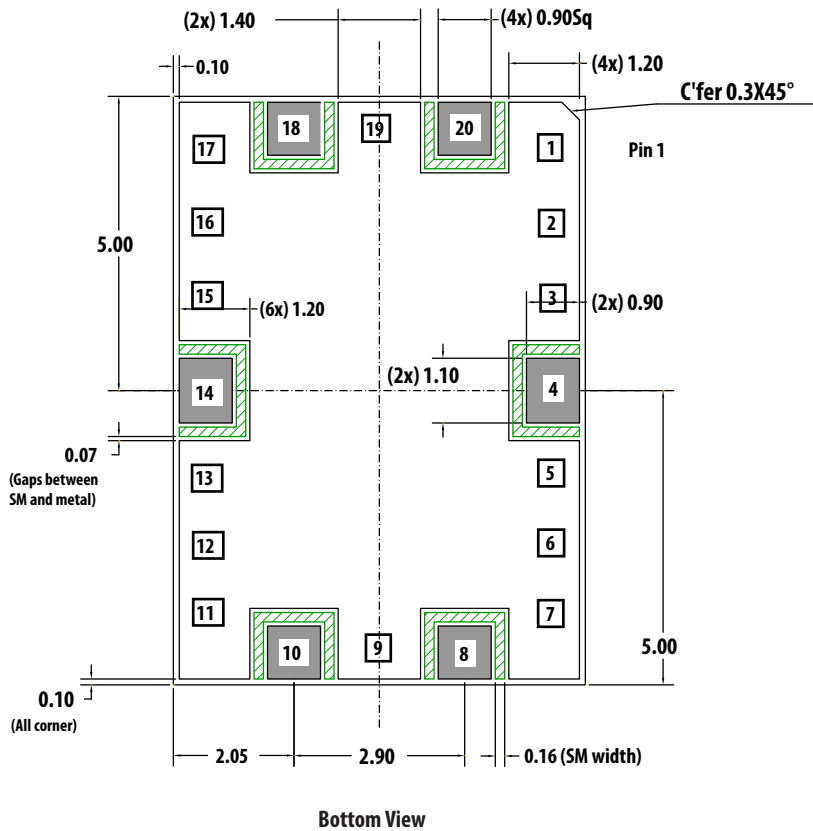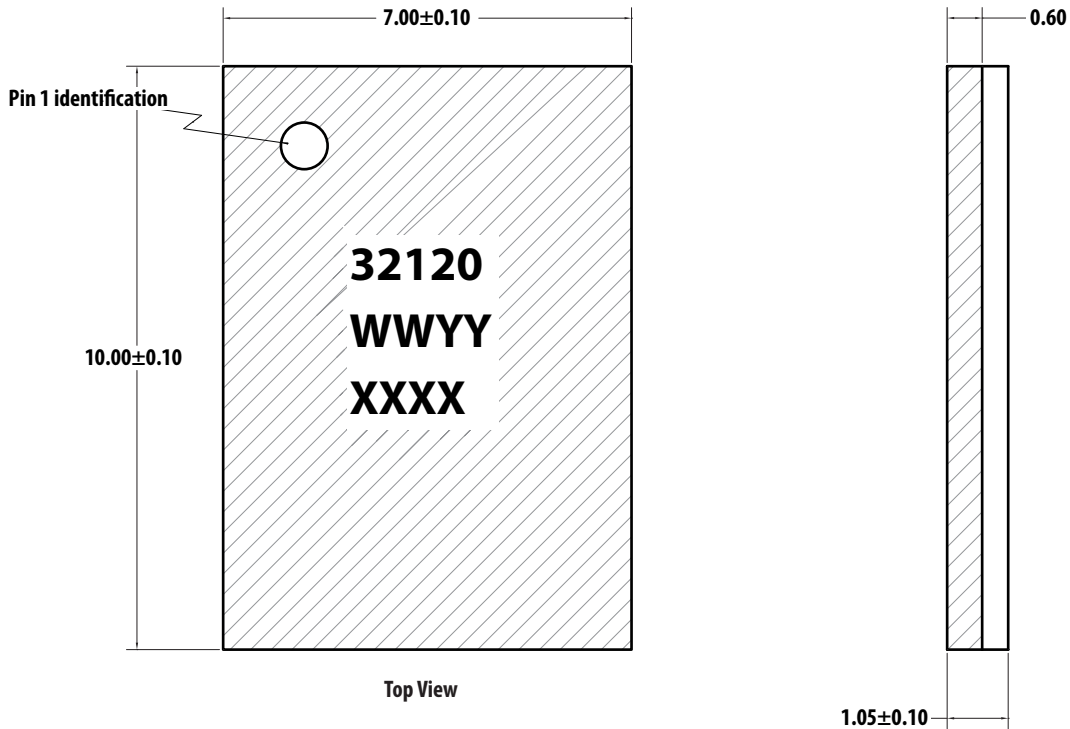


Notes:

1. All dimensions are in milimeters
2. Dimensions are inclusive of plating
3. Dimensions are exclusive of mold flash and metal burr

Device Orientation

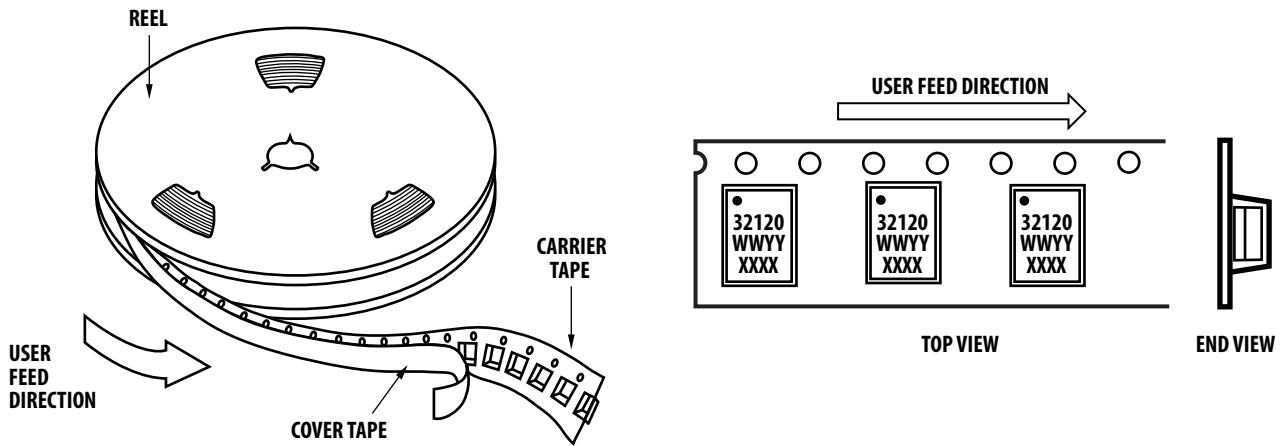

Tape Dimensions

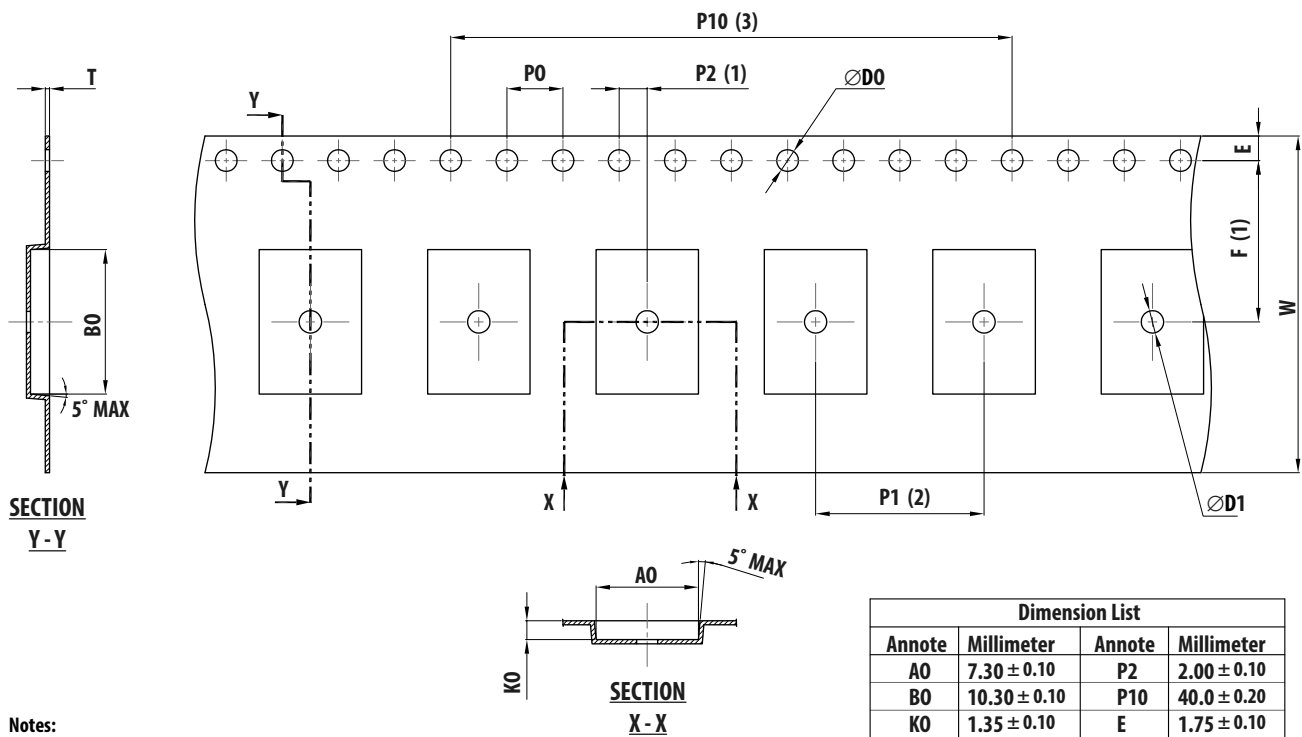


Notes:


1. Measure from centerline of sprocket hole to centerline of pocket.
2. Measure from centerline of pocket to centerline of pocket.
3. Pitch tolerance from sprocket hole, 10 pitch cumulative tolerance is $\pm 0.20\text{mm}$.
4. Allowable camber to be 1mm per 250mm in length.

| Dimension List | | | |
|----------------|---------------------|--------|------------------|
| Annote | Millimeter | Annote | Millimeter |
| A0 | 7.30 ± 0.10 | P2 | 2.00 ± 0.10 |
| B0 | 10.30 ± 0.10 | P10 | 40.0 ± 0.20 |
| K0 | 1.35 ± 0.10 | E | 1.75 ± 0.10 |
| D0 | $1.50^{+0.10}_{-0}$ | F | 11.50 ± 0.10 |
| D1 | 1.60 ± 0.10 | W | 24.00 ± 0.30 |
| P0 | 4.00 ± 0.10 | T | 0.31 ± 0.03 |
| P1 | 12.00 ± 0.10 | | |

Reel Dimensions – 13 Inch

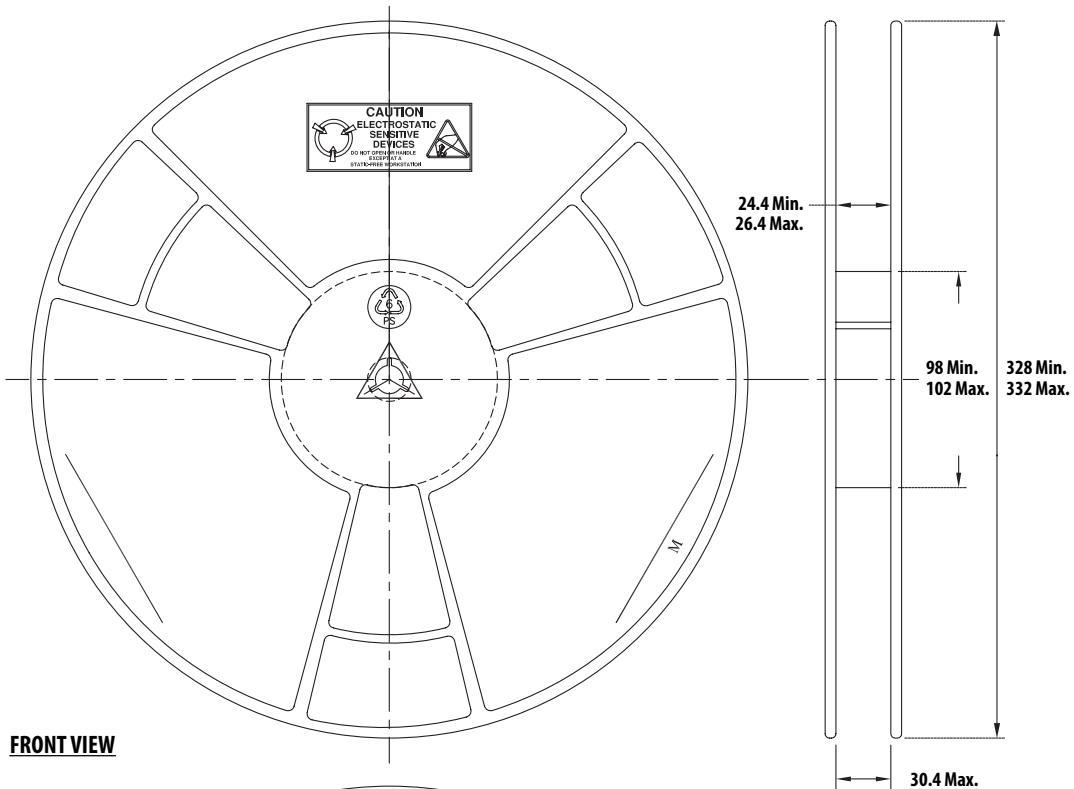

FRONT VIEW

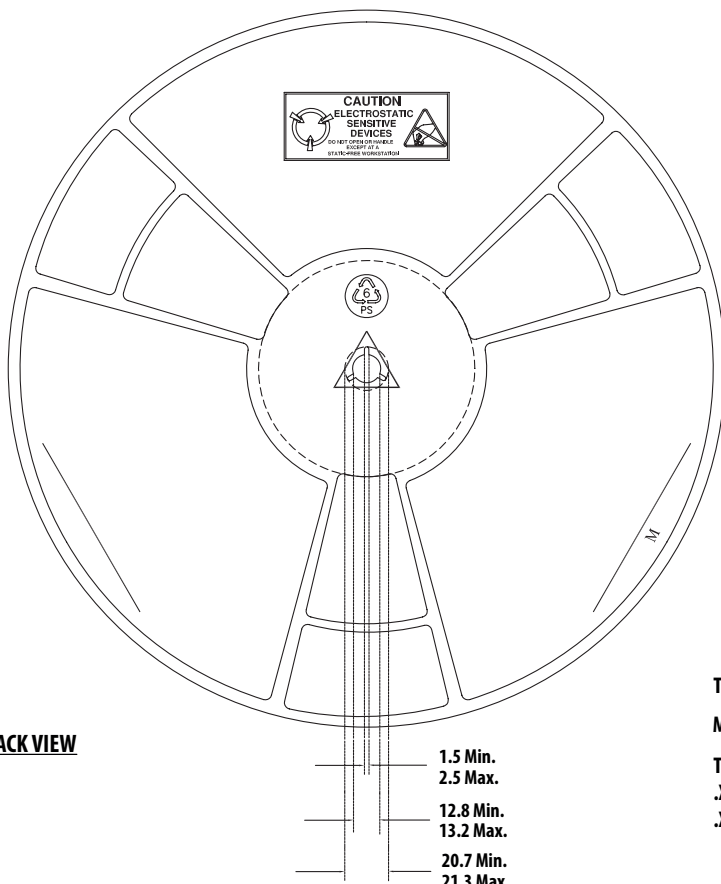

BACK VIEW

TAIPEX (M) SDN BHD
Measurements in mm

Tolerance:
.X = ±0.25
.XX = ±0.13

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2014 Avago Technologies. All rights reserved. AV02-1349EN - November 5, 2014

