



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## CFM/CMM Thermo-Anemometer + IR Thermometer

**Large display of Airflow or Air Velocity**  
 Plus model with built-in InfraRed Thermometer

### Features:


- Model AN100 — CFM/CMM Thermo-Anemometer
- Model AN200 — CFM/CMM Thermo- Anemometer with built-in non-contact IR Thermometer measures remote surface temperatures to 500°F (260°C) with an 8:1 distance-to-spot ratio and Laser Pointer
- Simultaneous display of Ambient Temperature and Air Flow or Air Velocity
- Up to 8 easy to set Area dimensions (ft<sup>2</sup> or m<sup>2</sup>) are stored in the meter's internal memory
- 20 point average function for Air Flow
- Super large LCD Backlit Display
- 3% velocity accuracy via low friction 2.83"D (72mm) ball bearing vane wheel on 3.9ft (120cm) cable
- Data Hold and MIN/MAX
- Auto Power off
- Complete with vane sensor with 3.9ft (120cm) cable, 9V battery, protective rubber holster, and carrying case

### Applications:

- HVAC installation, repair, diagnostics, and optimization.
- Fume hood testing, installation, and verification
- Ventilation system installation, servicing, and analysis
- Environmental wind and temperature testing/analysis
- Boiler rooms
- Ionizer flow output monitoring
- Automobile aerodynamic testing
- Plant/Facilities Maintenance



**BUILT IN IR**  
**Thermometer**  
 Patented

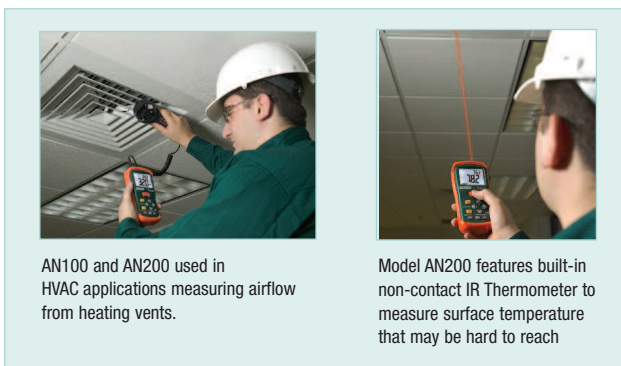

AN100 and AN200 used in HVAC applications measuring airflow from heating vents.

Model AN200 features built-in non-contact IR Thermometer to measure surface temperature that may be hard to reach

Specifications	Range	Resolution	Basic Accuracy
Air Velocity	0.40 to 30.00 m/s	0.01 m/s	±3% m/s
	1.4 to 108.0 km/h	0.1 km/h	±3% km/h
	80 to 5906 ft/min	1 ft/min	±3% ft/min
	0.9 to 67.2 mph	0.1 mph	±3% mph
Air Temperature	14 to 140°F (-10 to 60°C)	0.1°F/°C	±6.0°F (3°C)
	InfraRed Temperature (AN200 Only)	-58 to -4°F (-50 to -20°C)	0.1°F/°C
	-4 to 500°F (-20 to 260°C)	1°F/°C	±2% reading or ±2°F (°C) whichever is greater
Airflow			
AN100	0 to 9999 CMM (m <sup>3</sup> /min)	0.1	
	0 to 9999 CFM (ft <sup>3</sup> /min)	0.1	
AN200	0 to 999,999 CMM (m <sup>3</sup> /min)	0.1	
	0 to 999,999 CFM (ft <sup>3</sup> /min)	0.1	
Dimensions/Weight	7 x 2.9 x 1.3" (178 x 74 x 33mm)/1.6lbs (700g)		

### Ordering Information:

- AN100 .....CFM/CMM Thermo-Anemometer
- AN100-NIST .....CFM/CMM Thermo-Anemometer w/ Calibration Traceable to NIST
- AN200 .....CFM/CMM Thermo-Anemometer + IR Thermometer
- AN200-NIST .....CFM/CMM Thermo-Anemometer + IR Thermometer w/ Calibration Traceable to NIST

